


FOUR PLY FLAT POLYESTER WEB SLING BELT

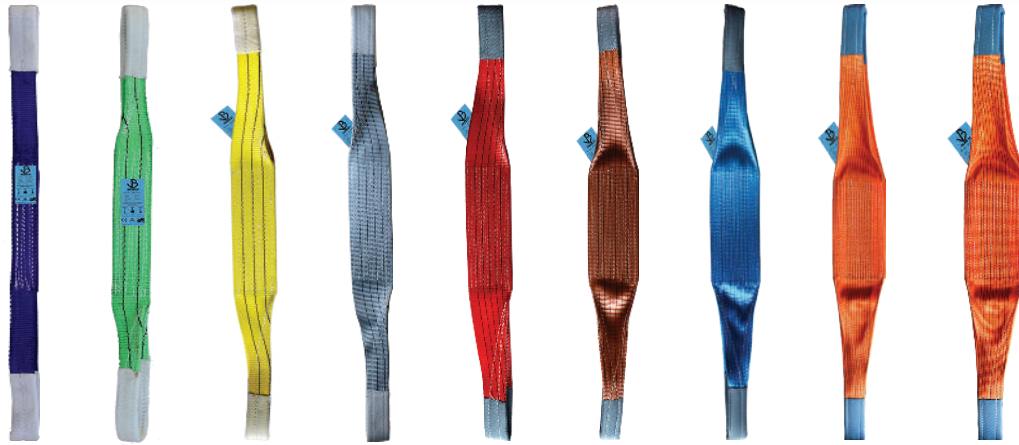

FEATURES

- Factor of Safety (Fos) – 6:1
- Working Temperature: 194°F (90°C) or below -40°F (-40°C).
- Lighter than the chain and steel wire rope sling
- Easy to use and high chemical resistance.
- Does not damage the material to be lifted. Positioning is fast and easy.
- Can tighten up the material to avoid slip while lifting the products.
- Only small storage space is required because of its flexibility.
- Medium initial investment cost. However, higher productivity, longer service life, easier handling and storage result in low total operating costs.
- Lightweight and excellent flexibility allow safer and easier handling of your valuable products.
- High resistance to chemical and oil contamination.
- Various sizes available for every application.
- Custom made slings for specific applications can be made to customer specifications.
- Special treatment gives excellent resistance to surface abrasion and cutting.
- Quality is maintained through constant research.

FOUR PLY FLAT POLYESTER WEB SLING BELT

WS04

Item Code(s)	COLOR	WIDTH		CAPACITY IN DIFFERENT SHAPE				THICKNESS
				STRAIGHT	BASKET	CHOKER	0-45	
		Inch	mm	(Ton)	(Ton)	(Ton)	(Ton)	(mm)
WS04-01	VOILET	1	25	2.0	4.0	1.6	2.8	15.0
WS04-02	GREEN	2	50	4.0	8.0	3.2	5.6	15.0
WS04-03	YELLOW	3	75	6.0	12.0	4.8	8.4	15.0
WS04-04	GREY	4	100	8.0	16.0	6.4	11.2	15.0
WS04-05	RED	5	125	10.0	20.0	8.0	14.0	15.0
WS04-06	BROWN	6	150	12.0	24.0	9.6	16.8	15.0
WS04-08	BLUE	8	200	16.0	32.0	12.8	22.4	15.0
WS04-10	ORANGE	10	250	20.0	40.0	16.0	28.0	15.0
WS04-12	ORANGE	12	300	24.0	48.0	19.2	33.6	15.0



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved