


# CLEVIS GRAB HOOK



## DESCRIPTION & FEATURES

- Used for shortening or holding required length of chain
- Versatile assembly for multipurpose applications.
- Material: G80 alloy steel(quenched and tempered)
- Proof load: 2 times of WLL.
- Safety factory: 4:1.
- Fatigue rated 1.5 times of WLL at 20,000 cycles.
- Finish: Colour painted
- According to standard: EN1677
- Traceability code, CE, WLL and JBL embossed.

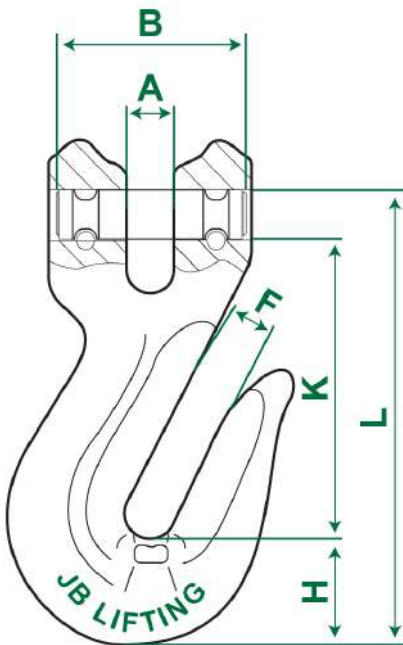

## CLEVIS GRAB HOOK

CGK

| Item Codes (s) | Working Load Limit | Breaking Load | Dimension |       |       |      |       |       | Weight |
|----------------|--------------------|---------------|-----------|-------|-------|------|-------|-------|--------|
|                |                    |               | A±0.5     | F±0.5 | B±1.5 | H±1  | K±2   | L±2   |        |
|                |                    |               | mm        | mm    | mm    | mm   | mm    | mm    |        |
| CGK06-1T       | 1.2                | 4.8           | 8         | 8     | 34    | 19.5 | 57    | 90.5  | 0.22   |
| CGK08-1.5T     | 2                  | 8             | 9.5       | 9.5   | 41    | 23   | 65.3  | 106.5 | 0.31   |
| CGK10-3T       | 3.2                | 12.8          | 12.7      | 12.5  | 46    | 31   | 82    | 137   | 0.7    |
| CGK13-5T       | 5.4                | 21.6          | 16        | 16.7  | 61    | 43   | 113   | 184.5 | 1.8    |
| CGK16-8T       | 8.2                | 32.8          | 19.5      | 20    | 68.5  | 49   | 129.5 | 215   | 3.1    |
| CGK20-12T      | 12.8               | 51.2          | 24        | 24    | 88    | 58   | 152   | 254   | 4.1    |
| CGK22-15T      | 15.5               | 62            | 27        | 26    | 96    | 64.8 | 178   | 295   | 6.2    |



## WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!  
Copyright©2023 | [www.jblifting.com](http://www.jblifting.com) | All rights reserved