


CLEVIS SELF LOCKING HOOK

DESCRIPTION & FEATURES

- **Safety factory:** 4:1
- **Material:** G80 alloy steel(quenched and tempered).
- **Proof load:** 2.5 x WLL.
- **Fatigue rated:** 1.5 times of WLL at 20,000 cycles.
- **Finish:** Colour painted.
- **According to standard:** EN1677-3
- **Traceability code:** capacity and WLL embossed.
- 100% MPI tested.
- Magnetic particle testing.
- Designed for coupling with Grade 80 alloy chain for lifting operations.
- Versatile assembly for multipurpose applications.

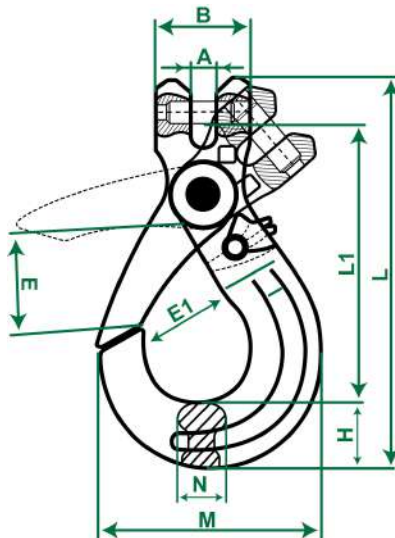

CLEVIS SELF LOCKING HOOK

CSLH

Item No.	WLL/T	BF/T	A mm	B mm	E mm	E1 mm	L1 mm	L mm	H mm	N mm	M mm	Weight/kg kg
6-8	1.12	4.48	8±0.5	32±1	32±2	28±1	99±3	134±3	20±1	15±0.5	73±2	0.45
7/8-8	2	8	9.5±0.5	38.5±1	40±3	35±1	119±3	162±3	26±1	20±0.5	91±2	0.85
10-8	3.15	12.6	12.5±0.5	46±1	48±3	45±2	142±3	195±3	30±1.5	26±1	108±2	1.48
13-8	5.3	21.2	15±0.5	59±1	57±3	52.5±2	179±4	248±4	40±1.5	33±1	142±3	2.85
16-8	8	32	18.5±0.5	77±1.5	65±4	63±2	225±4	310±4	50.5±2	38±2	168.6±3	6
18/20	12.5	50	24±1	81±1.5	82±4	82±3	238±5	335±5	55±2	50±2	185±4	7.5
22-8	15	60	25±1	97.5±2	80±5	76±3	277±5	392±5	67±2	52±2	202±4	12.28
26-8	21.2	84.8	30±1.5	118±2	109±5	96±4	312±6	449±6	75±3	60±3	239±5	21.8
32-8	31.5	126	35±1.5	150±2	131±6	131±4	416±6	590±6	97±3	79.5±3	329±5	46



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved