


EYE SELF LOCKING HOOK

DESCRIPTION & FEATURES

- Standard: EN1677-3.
- Safety Factor: 4:1.
- Material: GRP Alloy Steel.
- Proof Load: 2.5 x WLL.
- Fatigue Rate: 1.5 Times WLL @ 20000 cycles.
- Finish: Colour painted 100% MPI testing.
- Traceability Code: Capacity and WLL embossed.

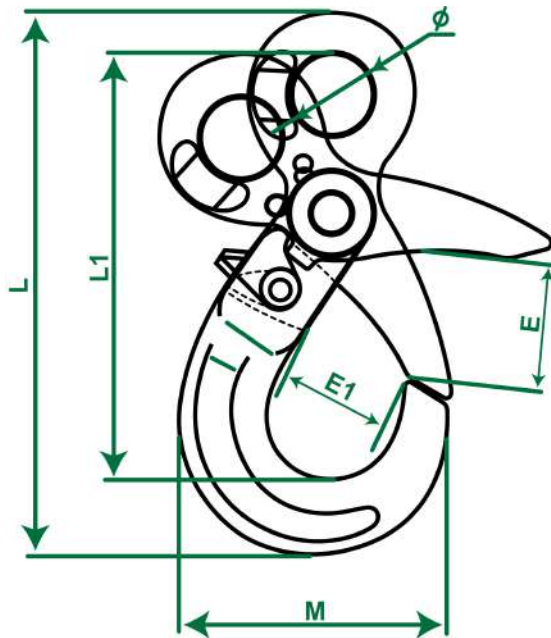

EYE SELF LOCKING HOOK

ESLH

Item Code(s)	Working Load Limit	Breaking Load	$\Phi \pm 1$	$E \pm 2$	$E1 \pm 2$	$L1 \pm 3$	$L \pm 3$	Weight
	tonne	tonne	mm	mm	mm	mm	mm	kg
ESLH06-1T	1.12	4.48	21	35	28	110	141	0.5
ESLH08-2T	2	8	25	40	35	136	175	0.88
ESLH10-3T	3.15	12.6	34.5	50	45	168	214	1.58
ESLH13-5T	5.3	21.2	40	60	52.5	207	268	3
ESLH16-8T	8	32	50	65	63.3	254	332	5.9
ESLH20-12T	12.5	50	64.5	80	86	274.5	332	7
ESLH22-15T	15	60	70	83	76	319	415	12.3
ESLH22-21T	21.2	84.8	80	106	96	362	472	20
ESLH22-31T	31.5	126	105	140	133	470	614	44



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved