


WIRE ROPE WEDGE SOCKET



DESCRIPTION & FEATURES

- **standard** EN 3411-6 and ASME B 30.26.
- **Safety Focus:** Essential for ensuring safety in rigging and lifting operations.
- **Purpose:** Used for wire rope termination and attachment.
- **Structure:** Open ended tubular design with a conical or spelter socket.
- **Installation:** Inserted and swung onto the wire rope for a secure termination.
- **Applications:** Commonly used in rigging, lifting, and suspension applications.
- **Versatile:** Allows attachment of wire rope to various equipment and structures.
- **Durability:** Designed for long-lasting performance in demanding environments.
- **Compliance:** Meets safety standards and regulations for wire rope terminations.
- **Integral Component:** Vital for creating secure terminations in various industrial applications.
- 80% termination efficiency.
- CE, SWL & JB Lifting (JBL) Mark shown on the product.

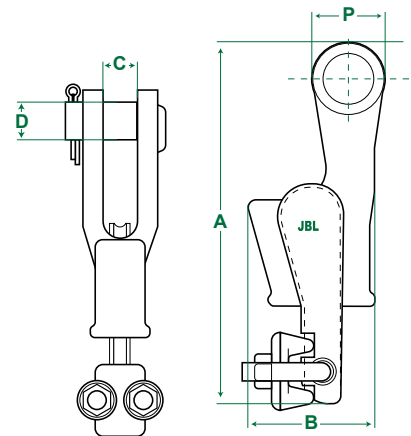

WIRE ROPE WEDGE SOCKET

WSKT

Item code(s)	WIRE ROPE DIA		DIMENSION					SWL	PL	MBL	N.W
			A	B	C	D	P				
	inch	mm	mm	mm	mm	mm	mm				
WSKT-10	3/8	9-10	143	70.5	20.5	20.5	39.6	1.2	3	59.04	1.5
WSKT-13	1/2	11-13	173	90	25.4	25.4	49.5	2.1	5.3	104	2.6
WSKT-16	5/8	14-16	208	111	32	30	57	3.3	8.2	161.6	3.8
WSKT-19	3/4	18-19	248	118	38	35	66.5	4.7	11.7	230.4	6.2
WSKT-22	7/8	20-22	283	122	44.5	41.5	79	6.4	15.9	312	9.8
WSKT-26	1	24-26	324	128	50.8	50.8	95	8.3	20.6	404.8	15
WSKT-28	1-1/8	28	365	140	57	57	108	10.4	25.9	508.8	21
WSKT-32	1-1/4	30-32	406	202	63.5	57	120	12.8	31.9	625.6	26
WSKT-36	1-3/8	36	465	220	69	64	130	15.4	38.5	754.4	38
WSKT-38	1-1/2	38	505	235	75	70	150	18.1	45.3	888	48.5



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved