


BULL ROPE – 18x7 (6-1) + WSC

CORE APPLICATIONS

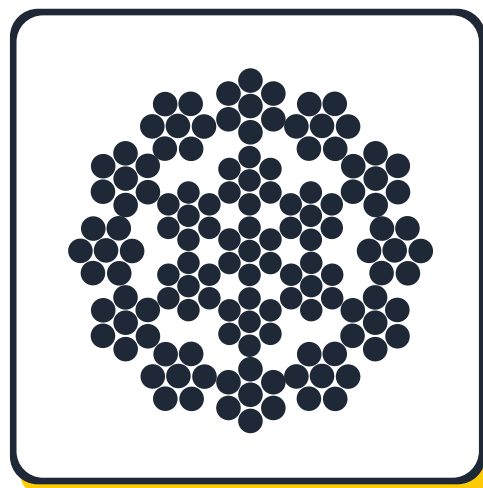

Details of Wire Rope

A

Specification

- Good Abrasion Resistance
- High Flexibility
- Specially Lubricated
- Good Rotation Resistance

B

Finish

- Galvanized
- UnGalvanized

C

Lay Options

- RHO (Right Hand Ordinary lay)
- LHO (Left Hand Ordinary lay)
- RHL (Right hand Langs lay)
- LHL (Left hand Langs lay)

Specification Chart

Normal Diameter	Approximate Mass	Minimum Breaking Force	
		1770	1960
mm	Kg/100m	kN	kN
8	26.7	37.2	41.1
9	33.9	47	52.1
10	41.5	58.1	64.3
11	50.1	70.2	77.8
12	59.4	83.6	92.6
13	70.4	98.1	109
14	81.3	114	126
16	107	149	165
18	134	188	208
19	151	210	232
20	165	232	257
22	201	281	311
24	239	334	370
26	281	392	435
28	325	455	504
32	429	594	658
36	541	752	833
38	604	838	928
40	670	929	1029

! More sizes available! The table shows some of our rope sizes. For additional options, just ask!