



SAFE & SECURE

TRADING COMPANY

SINCE 2005



Table of Content

1. Multiple Leg Steel Wire Rope Slings Chart

■ Multiple Leg Steel Wire Rope Slings Chart	1
■ Cable Laid Wire Rope Grommet Endless Sling	2

2. Multiple Leg Chain Slings Chart

■ Multiple Leg Chain Slings Chart	4
---	---

3. Multi-Ply Polyester Web Slings Belt Chart

■ Multi-Ply Polyester Web Slings Belt Chart	5
■ Seamless Endless Grommet Round Sling Belt	6

4. Steel Wire Ropes

■ Bull Rope - 6x19S (9-9-1) - FC/IWRC	7
■ Bull Rope - 6x36WS (14-7+7-7-1) - FC/IWRC	8
■ Bull Rope - 18x7 (6-1) + WSC	9
■ Bull Rope - K - 19x7 (6-1) - WSC	10
■ Bull Rope - K - 35x7 (6-1) + WSC	11

5. Block / Hoist / Trolley / Pulleys

■ Electric Chain Block Without Trolley	12
■ Electric Chain Block With Trolley	13
■ Heavy Duty Manual-Hand Operated Chain Block Hoist	14
■ Hand Operated Chain Lever Block	15
■ Snatch Block (With Swivel Hook Type)	16
■ Snatch Block (With Swivel Shackle Type)	17
■ Wire Rope Puller/Hoist	18
■ Plain Beam Trolley	19
■ Geared Beam Trolley	20
■ Manual Pallet Truck	21
■ Single Sheave Pulley	22
■ Double Sheave Pulley	23

6. Cargo Accessories

■ Cargo Tie Down Belt	24
■ Load Binder Lever Type	25
■ Load Binder Ratchet Type	26

7. Chains

■ 304 & 316 Stainless Steel Short Link Chain	27
■ 304 & 316 Stainless Steel Long Link Chain	28
■ G43 Alloy Chain	29
■ G80 Alloy Chain	30

8. Fall Protection

■ Retractable Fall Arrestor	31
■ Industrial Safety Confined Space Rescue Tripod	32
■ Full Body Safety Harness	33

9. Hooks

■ Clevis Self Locking Hook	34
■ Eye Self Locking Hook	35
■ Clevis Grab Hook	36
■ Clevis Sling Hook	37
■ Eye Sling Latch Hook	38
■ Sorting Pipe Hook	39
■ Swivel Sling Hook	40
■ DK Series Fork Hook	41

10. Lifting Clamps

■ Lifting Beam Clamp	42
■ Permanent Magnetic Plate Lifter	43
■ Vertical Plate Lifting Clamp	44
■ Horizontal Plate Lifting Clamp	45
■ Horizontal Pipe Lifting Clamp	46

11. Rigging Accessories

■ Alloy Steel Clevis Lug Link	47
-------------------------------------	----

■ Welded Master Link	48
■ Welded Masterlink Assembly	49
■ Drum Lifter Chain Sling	50

12. Rigging Screws

■ Concrete Lifting Loop	51
■ Concrete Lifting Socket	52
■ Turnbuckle Galvanized Eye And Eye	53
■ Turnbuckle Galvanized Eye And Hook	54
■ Turnbuckle Galvanized Hook And Hook	55
■ G80 Eye Bolt	56
■ G80 Eye Nut	57
■ US Type Turnbuckle Eye & Eye	58
■ US Type Turnbuckle Eye & Hook	59
■ US Type Turnbuckle Hook & Hook	60
■ US Type Turnbuckle Jaw & Eye	61
■ US Type Turnbuckle Jaw & Jaw	62

13. Shackles

■ S6 Bolt Type Bow Shackle	63
■ S6 Screw Pin Bow Shackle	64
■ S6 Bolt Type Dee Shackle	65
■ S6 Screw Type Dee Shackle	66

14. Stainless Steel Accessories

■ SS Swivel Eye & Eye	67
■ SS Swivel Eye & Jaw	68
■ SS Swivel Jaw & Jaw	69
■ SS Turnbuckle Eye & Eye	70
■ SS Turnbuckle Eye & Hook	71
■ SS Turnbuckle Hook & Hook	72
■ SS Turnbuckle Jaw & Jaw	73
■ SS Wire Rope Clip	74
■ Stainless Steel Dee Type Shackle Screw	75
■ Stainless Steel Eye Bolt	76
■ Stainless Steel Eye Nut	77
■ Stainless Steel Thimble	78

15. Wire Rope Fittings

■ Galvanized Heavy Duty Thimble	79
■ Galvanized Thimble	80
■ Galvanized Wire Rope Clip	81
■ Heavy Duty Wire Rope Clip	82
■ Whipcheck Safety Cables	83
■ Wire Rope Closed Spelter Socket	84
■ Wire Rope Open Spelter Socket	85
■ Wire Rope Wedge Socket	86
■ Wire Rope Gripper	87

16. Safety Joggers

■ Safety Joggers	88
------------------------	----

17. Modulift

■ Modulift	89
------------------	----

18. Others

■ Digital Crane Scale	90
■ Jack Stand	91
■ Floor Jack	92
■ Bottle Jack ST03	93
■ Bottle Jack ST03B	94
■ CLT / CLB Container Lifting Lugs	95
■ Mobile Gantry Crane	96
■ Lifting Equipment Frame	97
■ 3 Stand Rope	98
■ 8 Stand Rope	99

MULTIPLE LEG STEEL WIRE ROPE SLING CHART



DESCRIPTION & FEATURES

- Safety Factor 5:1
- Tensile Strength: 1960 MPa
- Meets and Exceeds: SWL AS PER BS 1290, ASME B30.9 & EN 13414-1
- High Breaking Load.
- Excellent Life Time.
- Strong against Abrasion.
- Quality is maintained through constant research.



MULTIPLE LEG STEEL WIRE ROPE SLING

Angle to the vertical	Single Leg Sling			Two Leg Sling		Three And Four Leg Sling	
	Vertical	Choker	Basket	0°-45°	45°-60°	0°-45°	45°-60°
Nominal Rope Dia (mm)	Working Load Limit (Tonnes)						
8 (5/16")	0.82	0.66	1.64	1.15	0.82	1.72	1.23
9	1.00	0.80	2.00	1.40	1.00	2.10	1.50
10 (3/8")	1.30	1.04	2.60	1.80	1.30	2.73	1.95
11	1.50	1.20	3.00	2.10	1.50	3.15	2.25
12	1.80	1.44	3.60	2.50	1.80	3.80	2.70
13 (1/2")	2.10	1.68	4.20	2.90	2.10	4.40	3.15
14 (9/16")	2.50	2.00	5.00	3.50	2.50	5.25	3.75
16 (5/8")	3.30	2.64	6.60	4.60	3.30	6.90	4.95
18	4.10	3.28	8.20	5.70	4.10	8.60	6.15
19 (3/4")	4.60	3.68	9.20	6.40	4.60	9.65	6.90
20	5.10	4.08	10.20	7.10	5.10	10.70	7.65
22 (7/8")	6.20	4.96	12.40	8.70	6.20	13.00	9.30
24	7.40	5.92	14.80	10.30	7.40	15.00	11.10
26 (1")	8.60	6.88	17.20	12.00	8.60	18.05	12.90
28 (1-1/8")	10.00	8.00	20.00	14.00	10.00	21.00	15.00
32 (1-1/4")	13.10	10.48	26.20	18.30	13.10	27.50	19.65
36 (1-3/8")	16.60	13.28	33.20	23.20	16.60	34.85	24.90
38 (1-1/2")	18.50	14.80	37.00	25.90	18.50	38.85	27.75
40	20.60	16.48	41.20	28.80	20.60	43.25	30.90
42 (1-5/8")	22.60	18.08	45.20	31.60	22.60	47.45	33.90
44 (1-3/4")	24.80	19.84	49.60	34.70	24.80	52.10	37.20
48 (1-7/8")	29.50	23.60	59.00	41.40	29.50	61.95	44.25
52 (2")	34.80	27.84	69.60	48.70	34.80	73.10	52.20
56 (2-1/4")	40.20	32.16	80.40	56.30	40.20	84.40	60.30
60	46.20	36.96	92.40	64.70	46.20	97.00	69.30
64 (2-1/2")	54.80	43.84	109.60	76.70	54.80	115.10	82.20
71 (2-3/4")	66.60	53.28	133.20	93.20	66.60	139.85	99.90
76 (3")	76.50	61.20	153.00	107.10	76.50	160.65	114.75
83 (3-1/4")	89.60	71.68	179.20	125.50	89.60	188.20	134.46
89 (3-1/2")	101.00	80.80	202.00	141.40	101.00	212.10	151.50
103 (4")	129.00	103.20	258.00	180.60	129.00	270.90	193.50



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

CABLE LAID WIRE ROPE GROMMET ENDLESS SLING



DESCRIPTION & FEATURES

- **Standard:** EN13414-3
- **Construction:** Made from multiple wire ropes laid together to form a loop.
- **Purpose:** Used for lifting and rigging applications.
- **Versatility:** Can be used in various configurations for different lifting needs.
- **Durability:** Designed for heavy-duty use and long-term reliability.
- **Safety:** Ensures secure lifting and handling of loads.
- **Customization:** Can be customized to specific lengths and load capacities.
- **Applications:** Commonly used in industries like construction, maritime, and manufacturing.
- **Compliance:** Meets industry standards for safety and performance.
- CE, SWL & SSTC Mark shown on the product.



CABLE LAID WIRE ROPE GROMMET ENDLESS SLING

SWR-GRO

Angle Top Vertical Nominal Rope Decimeter	0 Degree Direct	0 Degree Choker Hitch
mm	t	t
24	9	7
27	11.5	9
30	14	11
33	17	13.5
36	20	16
39	23.5	19
42	27	21.5
48	35.5	28.5
54	45	36
60	55.5	44.5
66	69	55
72	84	68
78	102	81
84	121	97
90	144	115
98	168	135
102	198	157
108	227	182
114	262	210
156	700	-
152	750	-
168	800	-
174	850	-



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

CABLE LAID WIRE ROPE GROMMET ENDLESS

SWR-GRO

Angle Top Vertical	0 Degree	0 Degree
Nominal Rope Decimeter	Direct	Choker Hitch
mm	t	t
180	900	-
192	1000	-
216	1250	-
240	1500	-
258	1750	-
282	2000	-
300	2250	-
318	2500	-
354	3000	-
384	3500	-
414	4000	-
444	4500	-
474	5000	-
504	5500	-
528	6000	-
552	6500	-
576	7000	-
600	7500	-
624	8000	-
648	8500	-
682	9000	-
696	9500	-
Calculation Factors	1	0.8

MULTIPLE LEG CHAIN SLINGS CHART

DESCRIPTION & FEATURES

- **Standard:** EN818-4 ASME B30.9 and OSHA specifications.
- **Material:** Alloy Steel.
- **Safety Factor:** 4:1
- **Proof Load:** 2.5 x WLL.
- **Construction:** Quenched & Tempered.
- **Construction:** Quenched & Tempered.
- **Grade:** 80
- **Finish:** Electrophoresis or black oxide.
- **Diameter :** Available in sizes ranging from 7mm to 32mm.
- CE, SWL & JB Lifting (JBL) mark shown on the product.



MULTIPLE LEG CHAIN SLING CHART

Nominal Size of Chain Sling	Working Load Limits, t, For Tones					
	 Single Leg Chain Slings	 Two Leg Chain Slings		 Three & Four Leg Chain Slings		 Endless Chain Slings in Choke Hitch
		0° < β ≤ 45°	45° < β ≤ 60°	0° < β ≤ 45°	45° < β ≤ 60°	
(mm)	Tonne Factor 1	Tonne Factor 1,4	Tonne Factor 1,0	Tonne Factor 2,1	Tonne Factor 1,5	Tonne Factor 1,6
4	0,5	0,71	0,5	1,06	0,75	0,8
5	0,8	1,12	0,8	1,6	1,18	1,25
6	1,12	1,6	1,12	2,36	1,7	1,8
7	1,5	2,12	1,12	3,15	2,24	2,5
8	2	2,8	2	4,25	3	3,15
10	3,15	4,25	3,15	6,7	4,75	5
13	5,3	7,5	5,3	11,2	8	8,5
16	8	11,2	8	17	11,8	12,5
18	10	14	10	21,2	15	16
19	11,2	16	11,2	23,6	17	18
20	12,5	17	12,5	26,5	19	20
22	15	21,2	15	31,5	22,4	23,6
23	16	23,6	16	35,5	25	26,5
25	20	28	20	40	30	31,5
26	21,2	30	21,2	45	31,5	33,5
28	25	33,5	25	50	37,5	40
32	31,5	45	31,5	67	47,5	50
36	40	56	40	85	60	63
40	50	71	50	106	75	80
45	63	90	63	132	95	100



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

MULTI-PLY POLYESTER WEB SLINGS BELT CHART



DESCRIPTION & FEATURES

- Standard: ASME B30.9.
- Material: Polyester.
- Factor of Safety 6:1 and 7:1.
- Proof load: 2 x WLL.
- Temperature: -40 °c to 90 °c.
- Lighter than the chain and steel wire rope sling.
- Does not damage the material to be lifted Positioning is fast and easy.
- Can tighten up the material to avoid slip while lifting the products.
- Only small storage space is required because of its flexibility.
- Medium initial investment cost. However, higher productivity, longer service life, easier handling and storage result in low total operating costs.
- Lightweight and excellent flexibility allow safer and easier handling of your valuable products.
- Various sizes available for every application.
- Custom made slings for specific applications can be made to customer specifications.
- Special treatment gives excellent resistance to surface abrasion and cutting.
- Quality is maintained through constant research.



Colour	Width		CAPACITY IN DIFFERENT SHAPES															
			Straight - 100%				Parallel Basket - 200%				Choker - 80%				Degree (0 - 45) Sling to Vertical			
	inch	SF6	1 Ply	2 Ply	3 Ply	4 Ply	1 Ply	2 Ply	3 Ply	4 Ply	1 Ply	2 Ply	3 Ply	4 Ply	1 Ply	2 Ply	3 Ply	4 Ply
		mm	Tonne	Tonne	Tonne	Tonne	Tonne	Tonne	Tonne	Tonne	Tonne	Tonne	Tonne	Tonne	Tonne	Tonne	Tonne	Tonne
VIOLET	1	25	0.5	1.0	1.5	2.0	1.0	2.0	3.0	4.0	0.4	0.8	1.2	1.6	0.7	1.4	1.2	2.8
GREEN	2	50	1.0	2.0	3.0	4.0	2.0	4.0	6.0	8.0	0.8	1.6	2.4	3.2	1.4	2.8	2.4	5.6
YELLOW	3	75	1.5	3.0	4.5	4.5	3.0	6.0	9.0	12.0	1.2	2.4	3.6	4.8	2.1	4.2	3.6	8.4
GREY	4	100	2.0	4.0	6.0	6.0	4.0	8.0	12.0	16.0	1.6	3.2	4.8	6.4	2.8	5.6	4.8	11.2
RED	5	125	2.5	5.0	7.5	8.0	5.0	10.0	15.0	20.0	2.0	4.0	6	8.0	3.5	7.0	6.0	14.0
BROWN	6	150	3.0	6.0	9.0	10.0	6.0	12.0	18.0	24.0	2.4	4.8	7.2	9.6	4.2	8.4	7.2	16.8
BLUE	8	200	4.0	8.0	12.0	16.0	8.0	16.0	24.0	32.0	3.2	6.4	9.6	12.8	5.6	11.2	9.6	22.4
ORANGE	10	250	5.0	10.0	15.0	20.0	10.0	20.0	30.0	40.0	4.0	8.0	12	16.0	7.0	14.0	12.0	28.0
ORANGE	12	300	6.0	12.0	18.0	24.0	12.0	24.0	36.0	48.0	4.8	9.6	14.4	19.0	8.4	16.8	14.4	33.6



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

SEAMLESS ENDLESS GROMMET ROUND SLING BELT



DESCRIPTION & FEATURES

- **Material:** Made of UHMWPE yarn with nylon cover.
- **Strength:** Stronger than wire rope slings.
- **Weight:** Very lightweight, <10% of wire rope.
- **Low Elongation:** Minimal stretching, safer lifting.
- **Safety:** Reduces risk of lash back.
- **Stability:** Stable with hooks, no rotating issues.
- **Expertise:** Designed by (JBL) with extensive experience.
- CE, SWL & JB Lifting (JBL) Mark shown on the product.



SEAMLESS ENDLESS GROMMET ROUND SLING BELT

RS1

Item Code(s)	Color Code	CAPACITY IN DIFFERENT SHAPE (SWL)					Approx Thickness	Approx Width	Minimum Length
		STRAIGHT	CHOKER	BASKET	0-45 DEGREE	45-60 DEGREE			
		Tons	Tons	Tons	Tons	Tons	(mm)	(mm)	(meter)
RS1-01	Violet	1	0.8	2	1.4	1	6	40	0.5
RS1-02	Green	2	1.6	4	2.8	2	7	50	0.5
RS1-03	Yellow	3	2.4	6	4.2	3	8	60	0.5
RS1-04	Grey	4	3.2	8	5.6	4	9	70	0.5
RS1-05	Red	5	4	10	7	5	11	75	0.5
RS1-06	Brown	6	4.8	12	8.4	6	12	80	1
RS1-08	Blue	8	6.4	16	11.2	8	13	90	1
RS1-10	Orange	10	8	20	14	10	15	100	2
RS1-12	Orange	12	9.6	24	16.8	12	16	110	2
RS1-15	Orange	15	12	30	21	15	18	125	2
RS1-20	Orange	20	16	40	28	20	20	150	2.5
RS1-25	Orange	25	20	50	35	25	24	180	2.5
RS1-30	Orange	30	24	60	42	30	32	200	2.5
RS1-40	Orange	40	32	80	56	40	40	200	2.5
RS1-50	Orange	50	40	100	70	50	45	220	2.5
RS1-60	Orange	60	48	120	84	60	65	240	4
RS1-80	Orange	80	64	160	112	80	70	260	4
RS1-100	Orange	100	80	200	140	100	80	290	4
RS1-125	Orange	125	100	250	175	125	120	450	5




WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

BULL ROPE – 6x19S(9-9-1) – FC/IWRC

CORE APPLICATIONS

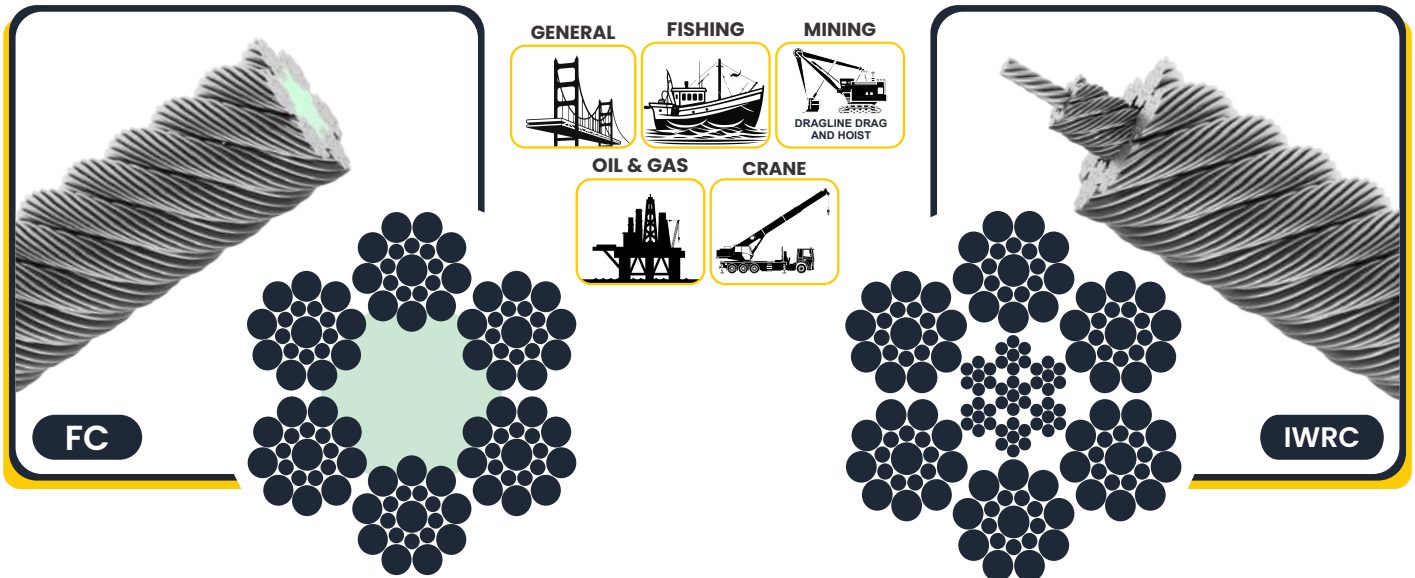

Details of Wire Rope

A

Specification

FC

- Good Abrasion Resistance
- High Flexibility
- Low Crush Resistance

IWRC

- Good Abrasion Resistance
- Low Flexibility
- Better Crush Resistance

B

Finish

- Galvanized
- Ungalvanized

C

Lay Options

- RHO (Right Hand Ordinary lay)
- LHO (Left Hand Ordinary lay)
- RHL (Right Hand Langs lay)
- LHL (Left Hand Langs lay)

Specification Chart

Normal Diameter mm	Approx Mass Kg/100m		Minimum Breaking Force			
			1770		1960	
	FC	IWRC	FC	IWRC	FC	IWRC
6	13.5	15.1	21	23	23	25
8	23.8	26.5	37	40	41	45
10	37.1	41.4	58	63	65	70
12	53.8	59.9	84	91	93	100
13	61.7	68.8	99	106	109	118
14	71	79	114	124	127	137
16	94.8	105	150	161	166	179
18	120	133	189	204	210	226
19	132	146	211	227	233	252
20	149	165	234	252	259	279
22	175	195	283	305	313	338
24	212	235	336	363	373	402
25	229	255	365	394	404	436
26	248	276	395	426	437	472
28	288	319	458	494	507	547
30	335	371	526	567	582	628
32	376	417	598	645	662	715
34	423	470	675	728	748	807
36	474	527	757	817	838	904
38	528	586	843	910	934	1008
40	590	654	935	1008	1035	1116
42	661	709	1030	1112	1141	1231
44	723	802	1131	1220	1252	1351
46	790	876	1236	1333	1369	1476
48	854	948	1346	1452	1490	1608
50	916	1007	1460	1575	1617	1744
51	954	1049	1519	1639	1682	1815
52	991	1089	1579	1704	1749	1887
54	1070	1176	1703	1837	–	2035

⚠ More sizes available! The table shows some of our rope sizes. For additional options, just ask!




WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

CORE APPLICATIONS

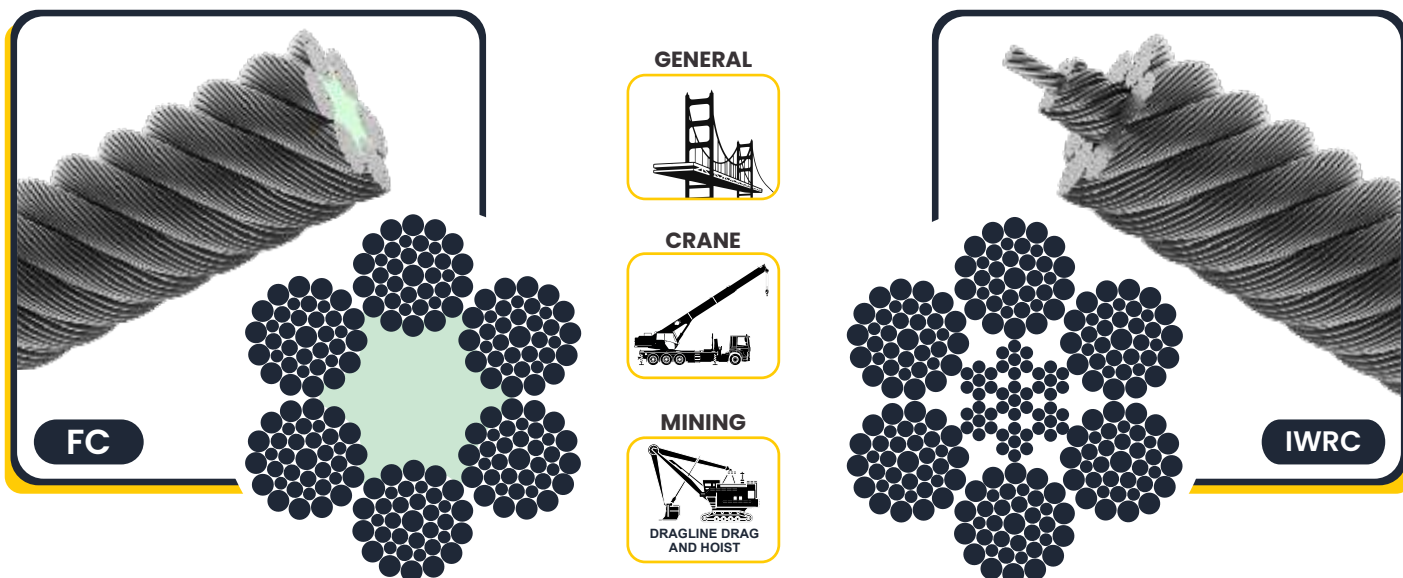

Details of Wire Rope

A

Specification

FC

- Capable to withstand the toughest conditions
- Good bend-fatigue life
- Lubricated to reduce wear and tear

IWRC

- Capable to withstand the toughest conditions
- Good bend-fatigue life
- Lubricated to reduce wear & tear

B

Finish

- Galvanized
- Ungalvanized

C

Lay Options

- RHO (Right Hand Ordinary lay)
- LHO (Left Hand Ordinary lay)
- RHL (Right Hand Langs lay)
- LHL (Left Hand Langs lay)

Specification Chart

Normal Diameter	Approx Mass		Minimum Breaking Force			
			1770		1960	
	Kg/100m		kN		kN	
mm	FC	IWRC	FC	IWRC	FC	IWRC
8	23.7	26.4	37	40	41	45
9	30.5	33.9	47	51	52	57
10	37.1	41.3	58	63	65	70
11	45.2	50.3	71	76	78	84
12	53.2	59.3	84	91	93	100
13	62.7	69.8	99	106	109	118
14	72.5	81	114	124	127	137
16	95.2	106	149	161	166	179
18	123	136	189	204	209	226
19	135	150	211	227	233	252
20	146	163	234	252	259	279
22	182	202	283	305	313	338
24	216	240	336	363	372	402
26	253	280	395	426	437	472
28	297	328	458	494	507	547
30	338	375	525	567	582	628
32	383	425	598	645	662	715
34	433	480	675	728	747	807
36	484	536	757	817	838	904
38	540	598	843	910	934	1008
40	603	666	934	1008	1035	1116
44	728	807	1130	1220	1252	1351
46	802	889	1235	1333	1368	1476
48	868	962	1345	1452	1490	1608
52	1017	1127	1579	1704	1748	1887
56	1181	1308	1831	1976	2028	2188
60	1357	1496	2102	2268	2328	2512
64	—	1701	—	2438	—	2700
68	—	1922	—	2753	—	3048
70	—	2026	—	2917	—	3230
72	—	2141	—	3086	—	3417
76	—	2403	—	3439	—	3807

More sizes available! The table shows some of our rope sizes. For additional options, just ask!




WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

BULL ROPE – 18x7 (6-1) + WSC

CORE APPLICATIONS

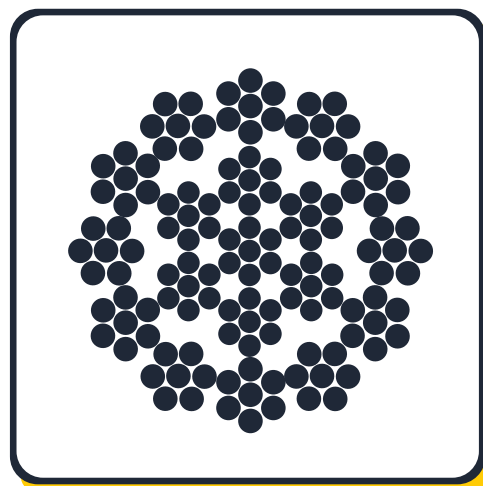

Details of Wire Rope

A

Specification

- Good Abrasion Resistance
- High Flexibility
- Specially Lubricated
- Good Rotation Resistance

B

Finish

- Galvanized
- UnGalvanized

C

Lay Options

- RHO (Right Hand Ordinary lay)
- LHO (Left Hand Ordinary lay)
- RHL (Right hand Langs lay)
- LHL (Left hand Langs lay)

Specification Chart

Normal Diameter	Approximate Mass	Minimum Breaking Force	
		1770	1960
mm	Kg/100m	kN	kN
8	26.7	37.2	41.1
9	33.9	47	52.1
10	41.5	58.1	64.3
11	50.1	70.2	77.8
12	59.4	83.6	92.6
13	70.4	98.1	109
14	81.3	114	126
16	107	149	165
18	134	188	208
19	151	210	232
20	165	232	257
22	201	281	311
24	239	334	370
26	281	392	435
28	325	455	504
32	429	594	658
36	541	752	833
38	604	838	928
40	670	929	1029

! More sizes available! The table shows some of our rope sizes. For additional options, just ask!




WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

BULL ROPE - K- 19x7 (6-1) + WSC

CORE APPLICATIONS

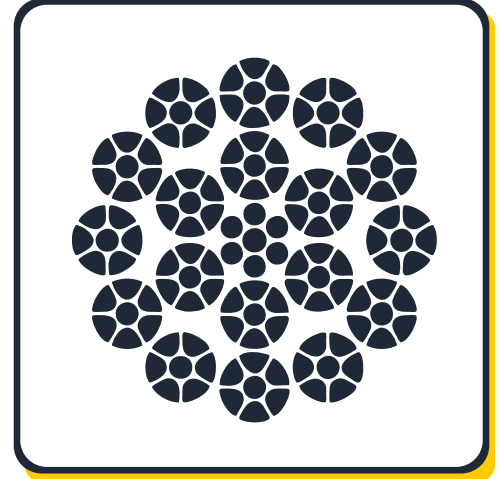

Details of Wire Rope

A

Specification



- Good Abrasion Resistance
- High Flexibility
- Specially Lubricated

B

Finish



- Galvanized
- UnGalvanized

C

Lay Options



- RHO (Right Hand Ordinary lay)
- LHO (Left Hand Ordinary lay)
- RHL (Right hand Langs lay)
- LHL (Left hand Langs lay)

Specification Chart

Normal Diameter	Approximate Mass	Minimum Breaking Force	
		1770	1960
mm	Kg/100m	kN	kN
8	26.7	37.2	41.1
9	33.9	47	52.1
10	41.5	58.1	64.3
11	50.1	70.2	77.8
12	59.4	83.6	92.6
13	70.4	98.1	109
14	81.3	114	126
16	107	149	165
18	134	188	208
19	151	210	232
20	165	232	257
22	201	281	311
24	239	334	370
26	281	392	435
28	325	455	504
32	429	594	658
36	541	752	833
38	604	838	928
40	670	929	1029

! More sizes available! The table shows some of our rope sizes. For additional options, just ask!





WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

BULL ROPE - K- 35x7 (6-1) + WSC

CORE APPLICATIONS

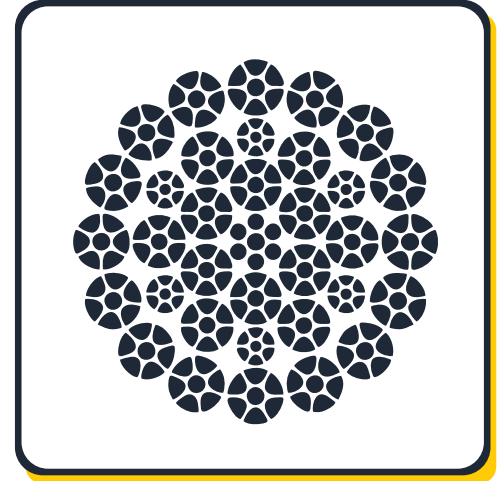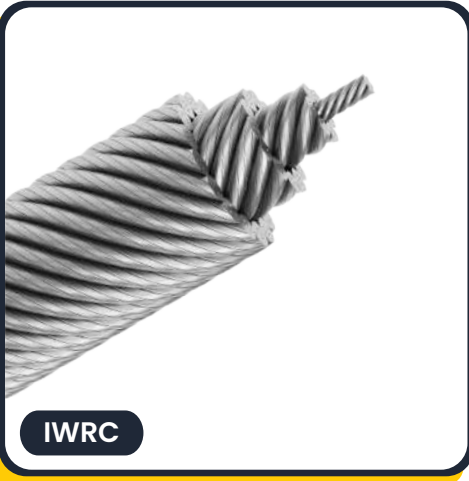

Details of Wire Rope

A

Specification

- Good Abrasion Resistance
- High Flexibility
- Specially Lubricated
- Rotation Resistance

B

Finish

- Galvanized
- UnGalvanized

C

Lay Options

- RHO (Right Hand Ordinary lay)
- LHO (Left Hand Ordinary lay)
- RHL (Right hand Langs lay)
- LHL (Left hand Langs lay)

Specification Chart

Normal Diameter	Approximate Mass	Minimum Breaking Force		
		1770	1960	2160
mm	Kg/100m	kN	kN	kN
14	101	157	174	192
16	133	207	229	252
18	164	263	291	321
19	184	294	326	359
20	207	327	362	399
22	244	397	439	484
24	288	469	519	572
26	340	542	600	661
28	409	646	715	788
30	448	705	780	860
32	512	792	877	967
35	615	893	990	1090
38	723	1053	1166	1286
40	803	1177	1304	1437
42	886	1301	1441	1588
46	1063	1594	1765	1906
48	1158	1680	1860	2050

⚠ More sizes available! The table shows some of our rope sizes. For additional options, just ask!



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

ELECTRIC CHAIN BLOCK WITHOUT TROLLEY



DESCRIPTION

- **Standard:** EN 14492:2 and ASME: B 30.26
- **Safety factor** 4:1
- **Temperature** -20°C to 65°C.
- **Proof load tested** 1.25 x WLL.
- **Versatility:** Versatile lifting solution for industrial needs.
- **Enhanced Mobility:** Equipped with a trolley for easy movement of heavy loads.
- **Advanced Safety Features:** Includes electronic limit load device and heat protection for secure lifting.

FEATURES

- Includes D.C. normal close brake and electronic limit load device.
- High tensile alloy steel hooks and carbonized load chain for longevity.
- Compatible with 3P/220~380V or 60Hz inputs.





ELECTRIC CHAIN BLOCK WITHOUT TROLLEY

CHBE

Item Code (s)	WLL (t)	Classification FEM/ISO	Duty Rating (ED)	Lifting Speed (M/Min)	Hoist Motor Power(kW)	Load Chain (mm)	Fall
CHBE-S-01	1	2m/M5	40%	8.6	1.5	7.1	1
CHBE-V-01			26.6%/13.4%	1.4-8.6			
CHBE-S-02	2		40%	8.6	3.3	10	1
CHBE-V-02			26.6%/13.4%	1.4-8.6			
CHBE-S-03	3		40%	6.7	3.3	10	1
CHBE-V-03			26.6%/13.4%	1.1-6.7			
CHBE-S-05	5		40%	4.0	3.3	11.2	2
CHBE-V-05			26.6%/13.4%	0.66-4.0			

Item Code (s)	WLL (t)	H Min	A	B	C	D	I	J	K
CHBE-S-01	1	460	142	102	329	307	276	630	38
CHBE-V-01					354				
CHBE-S-02	2	650	185	59	329	307	276	720	45
CHBE-V-02					354				
CHBE-S-03	3	525	185	165	358	336	430	780	45
CHBE-V-03					471				
CHBE-S-05	5	860	240	110	358	336	430	870	61
CHBE-V-05					471				

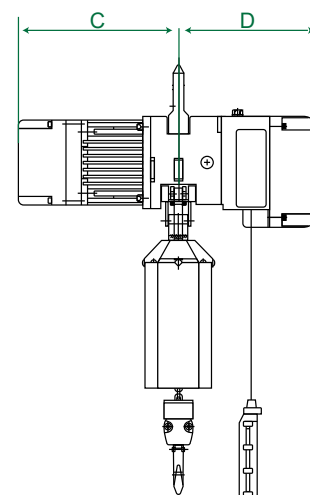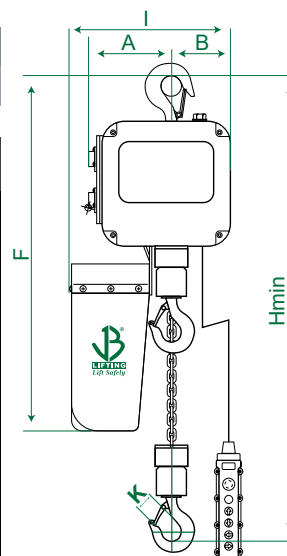

WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

ELECTRIC CHAIN BLOCK WITH TROLLEY



DESCRIPTION

- **Standard:** EN 14492:2 and ASME: B 30.26
- **Safety factor** 4:1
- **Temperature** -20°C to 65°C.
- **Proof load tested** 1.25 x WLL.
- **Versatility:** Versatile lifting solution for industrial needs.
- **Enhanced Mobility:** Equipped with a trolley for easy movement of heavy loads.
- **Advanced Safety Features:** Includes electronic limit load device and heat protection for secure lifting.

FEATURES


- Includes D.C. normal close brake and electronic limit load device.
- High tensile alloy steel hooks and carbonized load chain for longevity.
- Compatible with 3P/220~380V or 60Hz inputs.




ELECTRIC CHAIN BLOCK WITH TROLLEY

CHBET

Item Code (s)	WLL (t)	Classification FEM/ISO	Duty Rating (ED)	Lifting Speed (M/Min)	Hoist Motor Power(kW)	Load Chain (mm)	Fall
CHBE-S-01	1	2m/M5	40%	8.6	1.5	7.1	1
CHBE-V-01			26.6%/13.4%	1.4-8.6			
CHBE-S-02	2		40%	8.6	3.3	10	1
CHBE-V-02			26.6%/13.4%	1.4-8.6			
CHBE-S-03	3		40%	6.7	3.3	10	1
CHBE-V-03			26.6%/13.4%	1.1-6.7			
CHBE-S-05	5		40%	4.0	3.3	11.2	2
CHBE-V-05			26.6%/13.4%	0.66-4.0			

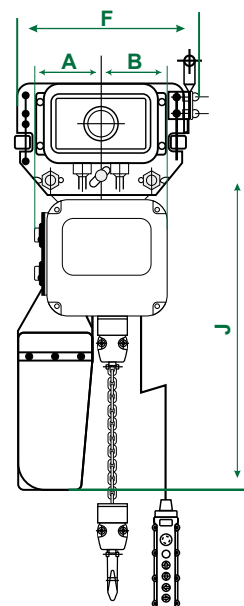

Item Code (s)	WLL (t)	H Min	A	B	C	D	F	J	K	M	N
CHBET-S-01	1	460	142	102	319	273	340	650	38	310	135
CHBET-V-01					349					336	
CHBET-S-02	2	650	185	59	319	273	340	650	45	312	135
CHBET-V-02					349					338	
CHBET-S-03	3	525	185	165	358	336	370	810	45	314	140
CHBET-V-03					471					340	
CHBET-S-05	5	860	240	110	358	336	410	850	61	360	142
CHBET-V-05					471					410	

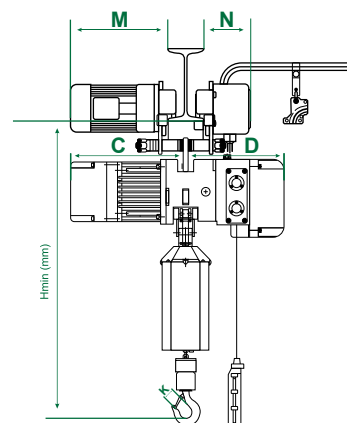

WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

HEAVY DUTY MANUAL-HAND OPERATED CHAIN BLOCK HOIST



DESCRIPTION & FEATURES

- Standard: EN 13157 and ASME B30.16
- Proof load: 1.5 x WLL
- Factor of Safety (FoS) - 4:1.
- Durability in service.
- Powder coated finished.
- High efficiency and small hand pull.
- Lightweight and easy handling.
- Automatic double pawl brake.
- High tensile quality load/lift chain.
- Zinc plated / Hot-dip Galvanized chain.
- High-quality bearings for the gearbox, side plates and load chain sheave permit a long service life.
- Quenched and Tempered High tensile alloy steel chain and hooks
- JB Lifting Logo, CE, Serial / Identification ID number, WLL / SWL is shown on the tag

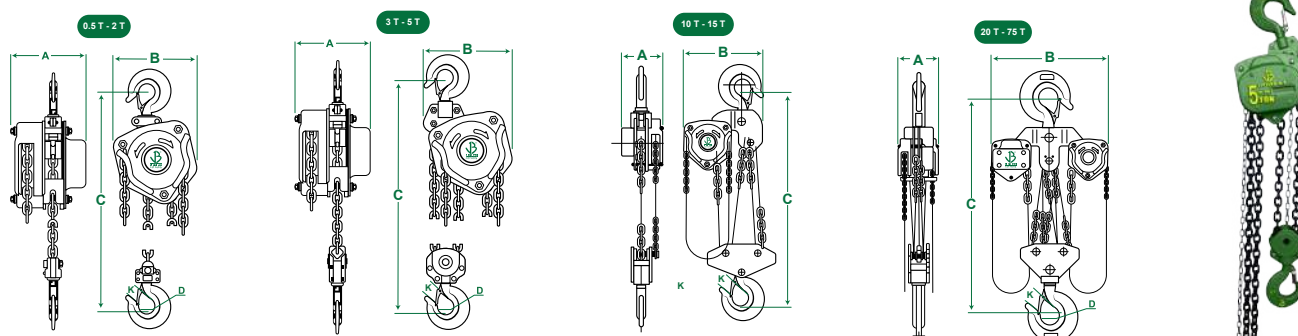

MANUAL CHAIN BLOCK

CHB

Item Code (s)		CHB0.5	CHB01	CHB1.5		CHB02		CHB03		CHB05		CHB7.5	CHB10		CHB15	CHB20		CHB30
Working Load Limit	tonne	0.5	1	1.5	1.5	2	2	3	3	5	5	7.5	10	10	15	20	20	30
Standard lift	m	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3
Running test load	kN	7.5	15	22.5	22.5	30	30	45	45	75	75	112.5	150	150	225	300	300	450
Effort required	N	225	300	310	350	300	310	350	370	400	415	415	410	415	420	410x2	410x2	410x2
Diameter of load chain	mm	5	6	7.1	8	6	8	7.1	8	9	10	10	9	10	10	9	10	10
Strands of load chain		1	1	1	1	2	1	2	2	2	2	3	4	4	6	8	8	12
Dimensions (mm)	A	132	152	152	155	152	185	152	155	185	189	189	185	189	194	220	224	274
	B	152	157	180	180	170	207	207	207	267	267	380	380	380	400	440	440	649
	C	315	355	375	375	405	430	500	500	680	680	650	750	750	880	940	940	1100
	D	34	38	48	48	48	48	50	50	57	57	72	80	80	85	106	106	120
	K	27	27	36	36	36	36	38	38	48	48	47	51	51	58	70	70	80
Net weight	kg	8.5	11	14	15	14.5	17.5	21	23	37	40	44	60	65	102	146	156	246
Packing measurement	cm	24.5x19x18	26x19x19	30.5x21x19		31x20x19	30x23.5x23	34x24x19		49x29x23		47x42x23	47x42x22		97x48x23	80x70x24	80x70x23	80x70x37
Extra weight per	kg	1.3	1.6	2	2.3	2.2	2.3	3.2	3.7	4.5	5.3	7.5	8.1	9.7	14	16.2	19.3	28.2



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

HAND OPERATED CHAIN LEVER BLOCK



DESCRIPTION & FEATURES

- Standard: ASME B30.16, BS EN 13157
- Proof Load: 1.5 x WLL
- Factor of Safety (FoS) – 4:1
- Durability in service.
- Lightweight and easy handling
- High efficiency and small hand pull
- Swivel 360o hooks with safety latches.
- Self-Lubricating anti-corrosion chain.
- Safe, Reliable in operations with minimum
- Quenched and tempered hooks are safe even when accidentally overloaded.
- Shock-resistant gear cover and brake cover locking out dust and rain.
- Extraordinary braking force, easy release, and the finest antirust treatment.
- JB Lifting Logo, CE, Serial / Identification ID number, WLL / SWL is shown on the tag.

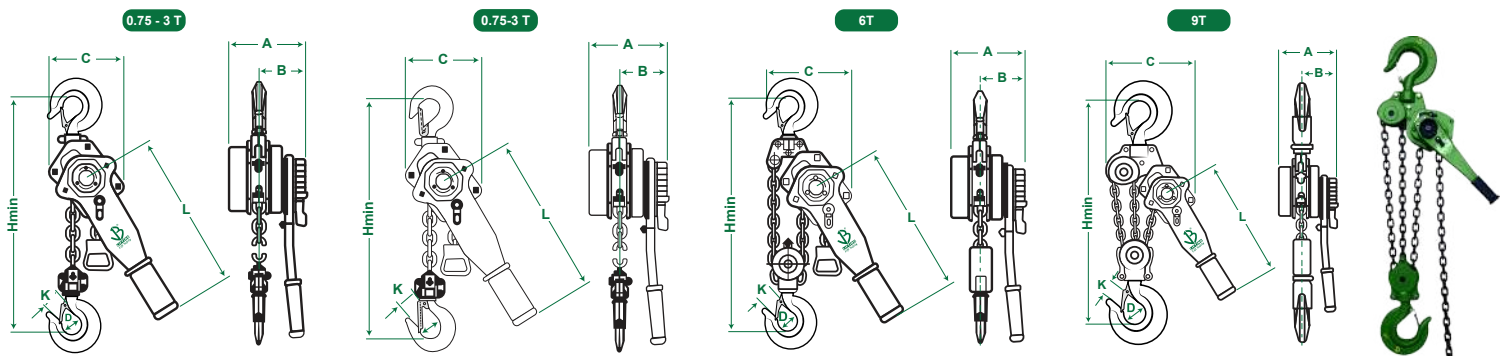

HAND OPERATED CHAIN LEVER BLOCK

LVRHST

Item Code (s)			LVRHS T	LVRHST -0.5T	LVRHST -0.75T	LVRHST -1T	LVRHST -1.5T	LVRHST -2T	LVRHST -3T	LVRHST -6T	LVRHST -9T
Work Load Limit		t	0.25	0.5	0.75	1	1.5	2	3	6	9
Standard lift		m	1	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Running test load		t	3.75	7.5	11.2	15	22.5	30	45	75	112.5
Effort required to lift rated load		N	250	340	140	185	230	251	285	385	390
Strands of loadchain			1	1	1	1	1	1	1	2	3
Diameter of load chain		mm	4	5	6	6	7.1	8	10	10	10
Dimensions	A	mm	92	105	153	153	166	175	195	195	195
	B	mm	72	78	86	96	100	105	112	112	112
	C	mm	85	80	130	130	150	160	202	242	312
	D	mm	30	35	38	38	48	48	50	65	81
	H	mm	230	260	295	295	335	385	450	550	660
	L	mm	160	300	315	315	365	368	365	365	365
	K	mm	25	25	27	27	36	36	38	48	54
Net weight		kg	1.8	4	7.5	7.5	9.5	15.5	16.5	27	40
Packing measurement		cm	22x18 x11	37x12 x11	33x18 x18.5	33x16 x13	45.5x20 x20.5	45.5x20 x20.5	48x22 x23	50.5x23 x23	48.5x32.5 x25
Extra weight per metre of Extra lift		kg	0.41	0.52	0.8	0.8	1.1	1.4	1.8	3.6	5.4



WARNING


Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

Snatch Block (With Swivel Hook Type)

DESCRIPTION & FEATURES

- Meets or exceeds ASME B30.26 and standard EN 13157.
- Safety factor 4:1.
- Temperature -10°C to 50°C.
- Manufactured from high-quality tensile steel for exceptional strength and durability.
- Furnished with roller bearings for smooth and efficient operation
- Reduce friction and wear on ropes and cables.
- Reliable performance in critical lifting operations.

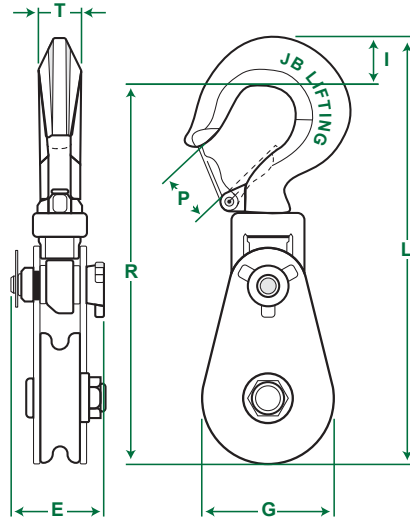

Snatch Block (With Swivel Hook Type)

SNBK

ItemCode(s)	Working Load	Sheave Dia.	Wire Rope Size		Dimensions							Weight
					T	E	G	I	R	L	P	
	(Tonne)	(Inch)	(mm)	(Inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
SNB02T-03K	2	3	8-10	5/16 ~ 3/8	18	64	75	25	224	250	25	23
SNB04T-04K	4	4.5	10-13	3/8 ~ 1/2	29	79	108	48	321	355	32	5.9
SNB08T-06K	8	6	16-19	5/8 ~ 3/4	38	104	104	54	427	488	51	12.8
SNB08T-08K	8	8	16-19	5/8 ~ 3/4	38	104	220	54	502	565	51	18.8
SNB12T-06K	12	6	19-22	3/4 ~ 7/8	41	134	168	67	498	565	64	22.7
SNB15T-08K	15	8	19-26	3/4 ~ 1	49	134	220	67	547	614	64	28.9
SNB15T-10K	15	10	19-26	3/4 ~ 1	49	134	280	67	702	769	64	42.7
SNB15T-12K	15	12	19-26	3/4 ~ 1	49	150	330	67	727	794	64	52.9
SNB20T-08K	20	8	25-29	1 ~ 1 1/8	61	150	216	76	643	719	86	41
SNB20T-10K	20	10	25-29	1 ~ 1 1/8	61	150	280	76	750	826	86	52.5
SNB20T-12K	20	12	25-29	1 ~ 1 1/8	61	150	330	76	805	881	86	62.5



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

Snatch Block (With Swivel Shackle Type)



DESCRIPTION & FEATURES

- Meets or exceeds all requirements of ASME B30.26 and standard EN 13157.
- Safety factor 4:1.
- Temperature -10°C to 50°C.
- Manufactured from high-quality tensile steel for exceptional strength and durability.
- Furnished with roller bearings for smooth and efficient operation.
- Reduce friction and wear on ropes and cables.
- Reliable performance in critical lifting operations.

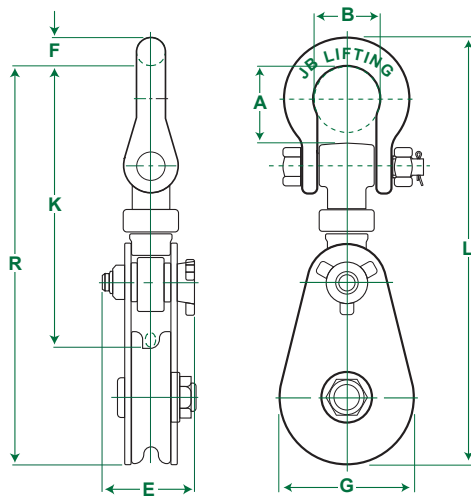

Snatch Block (With Swivel Shackle Type)

SNBS

ItemCode(s)	Working Load	Sheave Dia.	Wire Rope Size		Dimensions								Weight
	Tonne	Inch	mm	Inch	A	B	K	R	E	F	G	L	kg
					mm	mm	mm	mm	mm	mm	mm	mm	
SNB02T-03S	2	3	8-10	5/16 ~ 3/8	35	30	150	217	64	11	75	228	2
SNB04T-4.5S	4	4.5	10-13	3/8 ~ 1/2	64	50	243	337	79	19	107	356	5.9
SNB08T-06S	8	6	16-19	5/8 ~ 3/4	87	76	320	452	104	32	152	484	13
SNB08T-08S	8	8	16-19	5/8 ~ 3/4	87	76	333	526	104	32	220	558	19.5
SNB12T-06S	12	6	19-22	3/4 ~ 7/8	78	80	359	496	134	44	167	540	24.3
SNB15T-08S	15	8	19-22	3/4 ~ 7/8	78	80	355	545	134	44	220	589	29.6
SNB15T-10S	15	10	19-22	3/4 ~ 7/8	78	80	423	670	134	44	280	714	43
SNB15T-12S	15	12	19-22	3/4 ~ 7/8	78	80	428	726	134	44	330	770	53.5
SNB20T-08S	20	8	25-29	1 ~ 1 1/8	109	93	481	616	150	55	216	671	41.2
SNB20T-10S	20	10	25-29	1 ~ 1 1/8	109	93	485	723	150	55	280	778	54
SNB20T-12S	20	12	25-29	1 ~ 1 1/8	109	93		778	150	55	330	833	62.5
SNB25T-18S	25	18	26-32	1 ~ 1 1/4	140	130	645	1100	165	55	450	1012	150
SNB30T-20S	30	20	32-36	1 1/4 ~ 1 1/2	155	145	645	1130	185	55	515	1180	213




WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

WIRE ROPE PULLER/HOIST

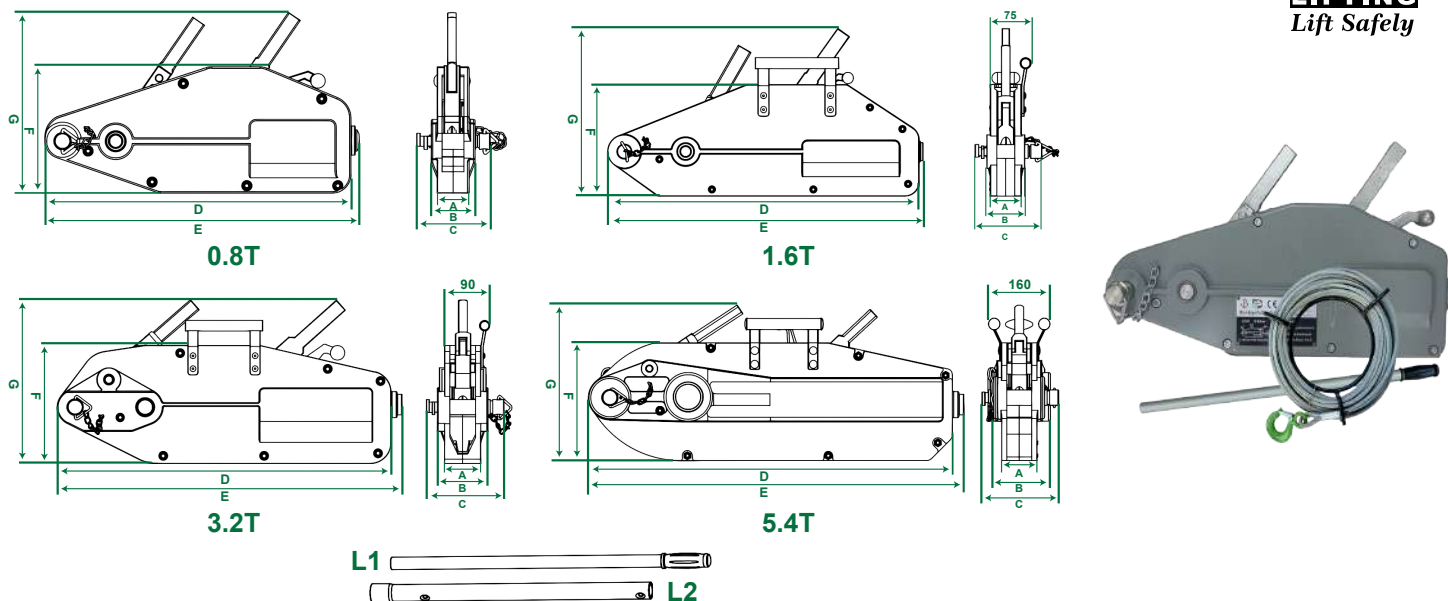

DESCRIPTION

- Ideal for use on flat and minor irregular surfaces
- Easy Installation
- Suspension eye allows easy attachment to hooks or other lifting gear
- CE, Serial number, SWL & JB Lifting (JBL) Mark shown on label and carton

FEATURES

- **Standard:** EN 13157
- **Material:** Aluminium
- **Construction:** Quenched & tempered
- **Proof load:** Individually proof tested to 1.5 time of working load limit
- **Finish:** Powder coated

WIRE ROPE PULLER/HOIST

PULR

Item Code (s)	Rated Capacity	Standard Rope Length	Rated Forward Handpower	Rated Forward Travel	Wire Rope Diameter	Safety Factor	Max. Traveling load	Weight	Outer Size							L1	L2
									A	B	C	D	E	F	G		
									mm	mm	mm	mm	mm	mm	mm	mm	mm
PULR-0.8T	800	20	341	=>52	8.3	5:1	1200	14.55	44	60	101	420	430	172	240	800	/
PULR-1.6T	1600	20	400	=>55	11	5:1	2400	25.4	56	68	120	545	556	200	270	800	1200
PULR-3.2T	3200	20	438	=>28	16	5:1	4000	48.3	70	98	150	645	666	227	320	800	1200
PULR-5.4T	5400	20	850	=>25	20	5:1	6750	95.7	90	160	200	935	940	300	410	880	1350





WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

PLAIN BEAM TROLLEY

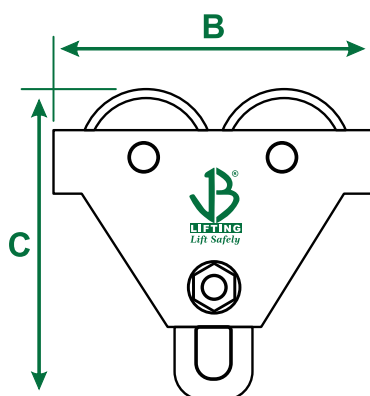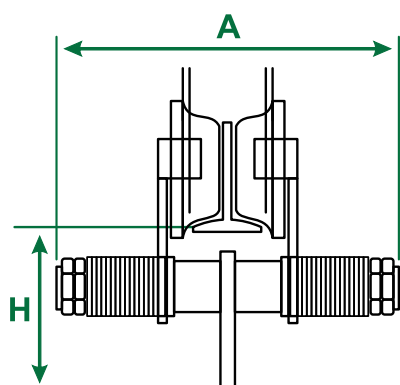

DESCRIPTION

- **Standard:** EN13157:2004+A1:2009
- **Material:** Carbon steel.
- **Factor of safety:** 4 to 1
- **Proof load:** Individually proof tested to 1.5 time of working load limit.
- **Construction:** Quenched & Tempered.
- **Finish:** Powder coated.

FEATURES

- Suitable for flat and minor irregular surfaces.
- Easy installation.
- Suspension eye allows easy connection to hooks and other lifting gears.
- CE, Serial number, SWL & JB Lifting (JBL) Mark shown on label and carton.

PLAIN BEAM TROLLEY

TP

ItemCode(s)	Capacity	WLL (Tonne)	I-Beam width (mm)	Dimensions				Weight (kg)
				A (mm)	B (mm)	C (mm)	H (mm)	
TP0.5T	TP-0.5T	0.5	68-126	208	196	190	108	5.5
TP01T	TP-1T	1	80-146	242	236	211	115	9.5
TP02T	TP-2T	2	80-168	280	273	236	130	13.5
TP03T	TP-3T	3	88-168	300	320	295	164	25
TP05T	TP-5T	5	100-170	316	366	334	177	44
TP10T	TP-10T	10	122-203	343	389	460	237	90





WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

GEARED BEAM TROLLEY

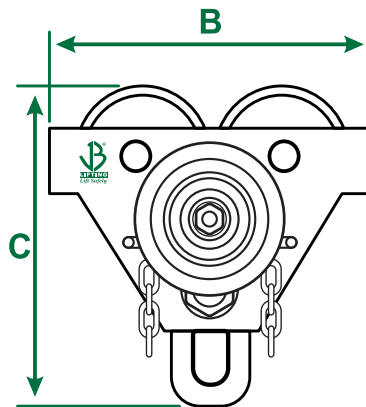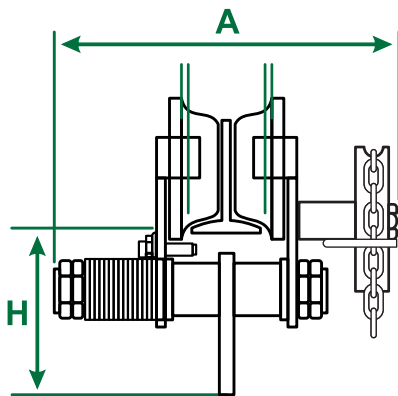

DESCRIPTION

- **Standard:** EN 13157
- **Material:** Carbon steel.
- **Factor of safety:** 4 to 1
- **Proof load:** Individually proof tested to 1.5 time of working load limit.
- **Construction:** Quenched & Tempered.
- **Finish:** Powder coated .

FEATURES

- Ideal for flat and minor irregular surfaces.
- Easy installation.
- Hand chain drop allows to and from movement.
- Suspension eye allows quick connection of hooks or other lifting gear.
- CE, Serial number, SWL & JB Lifting (JBL) Mark shown on label and carton.

GEARED BEAM TROLLEY

TG


ItemCode(s)	WLL (tonne)	I-Beam width (mm)	Dimensions				Weight (kg)
			A (mm)	B (mm)	C (mm)	H (mm)	
TG0.5T	0.5T	68-126	248	196	190	108	9
TG01T	1T	80-146	280	236	211	115	14
TG02T	2T	80-168	318	273	236	130	16
TG03T	3T	88-168	340	320	295	164	27
TG05T	5T	100-170	365	366	334	177	50
TG10T	10T	122-203	410	389	460	237	93
TG20T	20T	122-203	475	798	575	300	215
TG30T	30T	150-180	392	625	551	260	230
TG50T	50T	150-180	582	1242	832	478	610



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

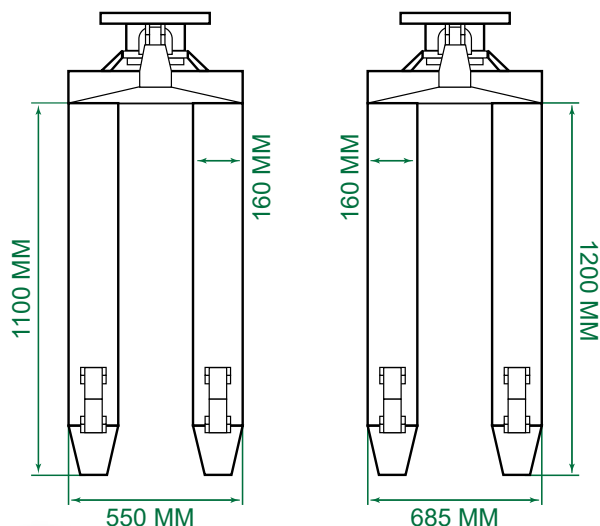

DESCRIPTION & FEATURES

- **Standard:** BS EN ISO 3691-5
- Essential tool for efficient material handling in industrial settings.
- Sturdy frame and durable components ensure reliable performance.
- Smooth-rolling wheels and comfortable handle for effortless navigation.
- Accommodates various pallet sizes for versatile handling of loads.

MANUAL PALLET TRUCK

PLT TRK

Item Code(s)		PLTTRK-1.5T	PLTTRK-2T	PLTTRK-3T	PLTTRK-5T
Work Load Limit	kg	1500	2000	3000	5000
Lowered Fork Height	mm	75	75	75	88
Steering Wheel	mm	Φ180*50	Φ180*50	Φ180*50	Φ200*50
Fork Wheel	mm	Φ80*70	Φ80*70	Φ80*70	Φ85*80
Max.Lift Height	mm	190-200	190-200	190-200	190-200
Total Height	mm	1215	1215	1230	1230
Overall Length	mm	1520	1520	1590	1544/1614
Fork Length	mm	1100/1220	1100/1220	1110/1220	1150/1220
Width Overall Forks	mm	550/685	550/685	550/685	550/685
Ground Clearance, Center of wheel base	mm	32	32	32	40
Aisle Width For Pallets 1000 * 1200 Crossways	mm	1720/1335	1720/1800	1720/1800	1720/1800
Turning Radius	mm	1265/1335	1265/1335	1265/1335	1265/1335
Service Weight	kg	50/52	68/70	73/75	120/125





WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

SINGLE SHEAVE PULLEY

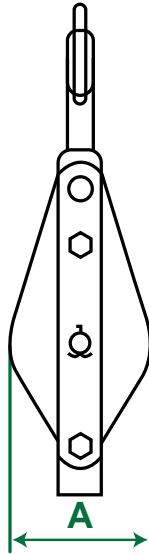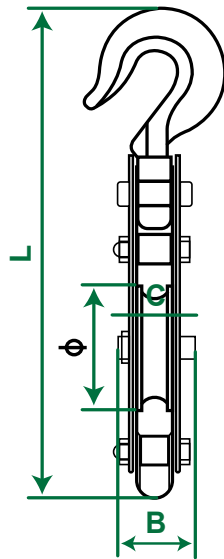

DESCRIPTION & FEATURES

- Blocks are used to change the direction of one or more ropes.
- Also used to make it easier to lift and haul loads.
- Sheave diameter is 4-inch.
- Maximum rope size is 3/8" - 1/2"
- Capacity is 1200 pounds.

SINGLE SHEAVE PULLEY

SIZE	SWL	WIRE DIA	Φ	L	A	B	C	WEIGHT
2"	0.25T	6MM	49	217	58	52.5	11	0.55KG
3"	0.5T	8MM	70.5	270.5	81	68.5	13	1.15KG
4"	1T	10MM	97	304.5	112	79.5	16	1.85KG
5"	1.5T	13MM	125	379	140	87	17	3.2KG
6"	2T	16MM	146	415	168	114	22	4.8KG
7"	3T	19MM	173	505	186	128	25	7.8KG
8"	4T	22MM	200	512	212	128.5	26	10KG
10"	5T	25MM	250	611	276	136	28	15KG
12"	6T	28MM	300	661	326	185	28	21KG




WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

DOUBLE SHEAVE PULLEY

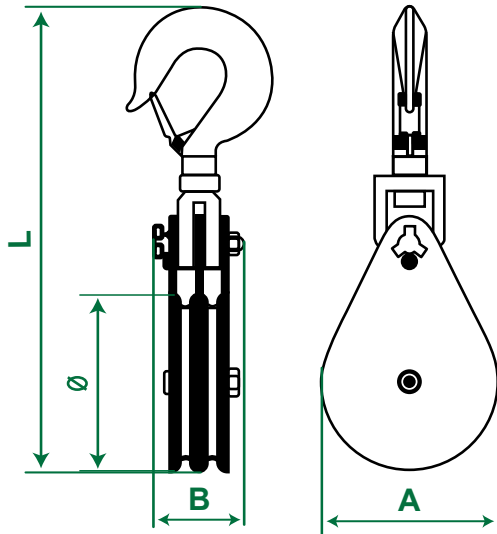

DESCRIPTION & FEATURES

- Supports heavy loads with dual sheaves.
- Secure, flexible attachment for versatile use.
- Durable material, ideal for outdoor/industrial use.
- Low-friction sheaves for easy lifting.
- Suitable for construction, marine, and DIY tasks.

DOUBLE SHEAVE PULLEY

SIZE	SWL	WIRE DIA	DIMENSION(MM)				WEIGHT(KG)
			Φ	L	A	B	
4-1/2"	4T	1/2"	104.5	350	108	135.5	9.2
6"	12T	3/4"	150	518	152	159.5	21
8"	12T	3/4"	200	569	203	159.5	28
10"	12T	3/4"	250	624	254	159.5	36.5
12"	12T	3/4"	300	697	306	159.5	50
14"	12T	3/4"	350	814	356	179	56
16"	15T	7/8"	406	923	416	253	101
18"	15T	1"	457	993	464	253	106.5



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

CARGO TIE DOWN BELT



DESCRIPTION & FEATURES

- **Standard:** EN 12195-2
- **Material:** Flat woven polyester webbing.
- **Proof load:** 1.3 x WLL
- **Temperature:** -40°C to 120°C
- **Standard Hand Force:** 500N
- These hooks have been specifically developed to support heavy duty transport applications.
- Ratchet handles allow for infinite adjustment and continuous take-up



CARGO TIE DOWN BELT


ItemCode(s)	Wide		BS
	Inch	mm	Tonnes
CB-1x5	1"	25	1
CB-1.5x5	1.5"	35	2
CB-2x10	2"	50	5
CB-3x10	3"	75	8
CB-4x10	4"	100	10

WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

LOAD BINDER LEVER TYPE

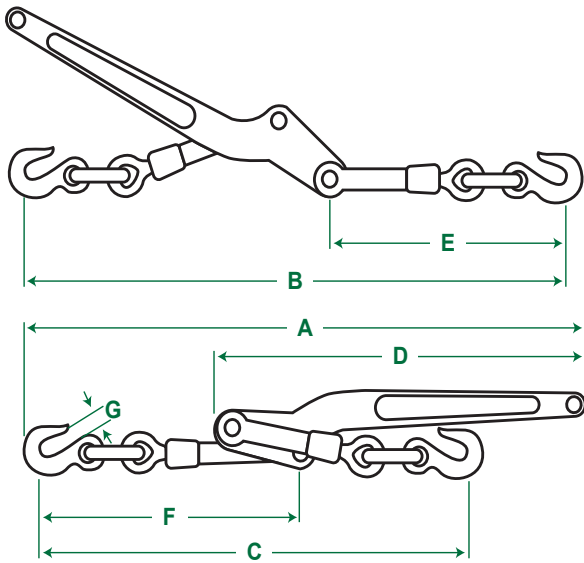

DESCRIPTION & FEATURES

- **Standard:** EN 12195.
- **Material:** Forged carbon steel/Grade 80.
- **Factor of safety:** 3.5 to 1
- **Proof load:** Individually Proof Tested to 2 times of Working Load Limit.
- **Construction:** Quenched & Tempered.
- **Finish:** Powder Coated .
- Built for heavy-duty transportation applications.
- It comes equipped with grab hooks to enable easy one-handed tightening or loosening of chain.
- Strong construction at the leverage point prevents spread.
- CE Certification, Traceability Code and JBL Logo Etmbossed.

LOAD BINDER LEVER TYPE

LBL

Item Code(s)	Min-Max Chain Size		Working Load Limit	Proof Load	Ultimate Load	Weight Each	Handle Length	Take Up	Dimensions(in)						
									A	B	C	D	E	F	G
	mm	in	lb	lb	lb	lb	in	in	in	in	in	in	in	in	in
LBL-10	8-10	5/16-3/8	5400	10800	19000	7.02	16.00	4.50	24.1	22.1	17.9	16.00	10.4	10.4	0.50
LBL-12	10-13	3/8-1/2	9200	18400	33000	12.47	18.69	4.50	28.8	25.8	21.3	18.7	12.3	12.4	0.63
LBL-16	13-16	1/2-5/8	13000	26000	46000	19.68	21.00	4.75	31.3	29.8	25	21.00	14.6	13.8	0.72





WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

LOAD BINDER RATCHET TYPE

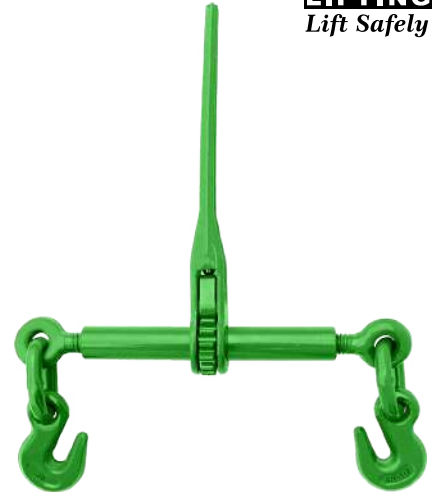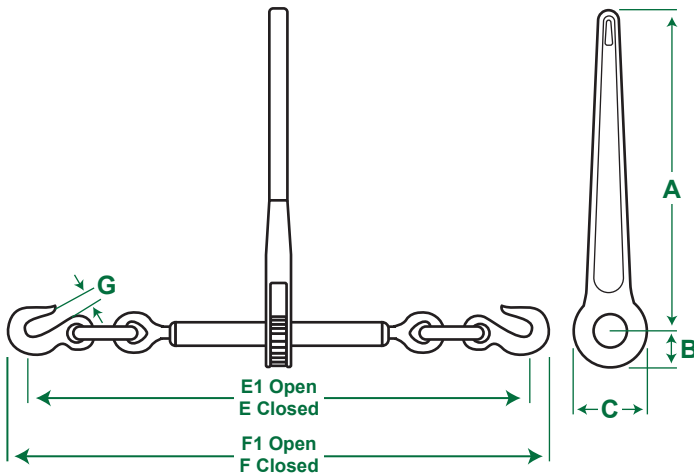

DESCRIPTION & FEATURES

- **Standard:** EN 12195
- **Material:** Forged carbon steel/Grade 80
- **Factor of safety:** 3.5 to 1
- **Construction:** Quenched & Tempered.
- **Proof load:** Individually Proof Tested to 2 times of Working Load Limit.
- **Finish:** Powder Coated.
- **Body:** Forged Carbon Steel.
- Hooks have been specifically developed to support heavy duty transport applications.
- Ratchet handles allow for infinite adjustment and continuous take-up.
- Short reach hooks ensure maximum take-up.

LOAD BINDER RATCHET TYPE

LBR

Item code(s)	Min-Max Chain Size		Working Load Limit	Proof Load	Weight Each	Handle Length	Barrel Length	Take Up	Dimensions(in)							
									A	B	C	E	E1	F	F1	G
	mm	in							lb	lb	lb	in	in	in	in	in
LBR-10	8-10	5/16-3/8	8800	17600	12.11	14	10	8	14	1.38	2.75	22.94	30.94	25.13	33.13	0.5
LBR-13	10-13	3/8-1/2	15000	30000	14.7	14	10	8	14	1.38	2.75	25.25	33.25	27.63	35.63	0.63
LBR-16	13-16	1/2-5/8	16000	32000	14.55	14	10	8	14	1.38	2.75	26.38	34.38	29.44	37.44	0.72




WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

304/316 STAINLESS STEEL CHAIN

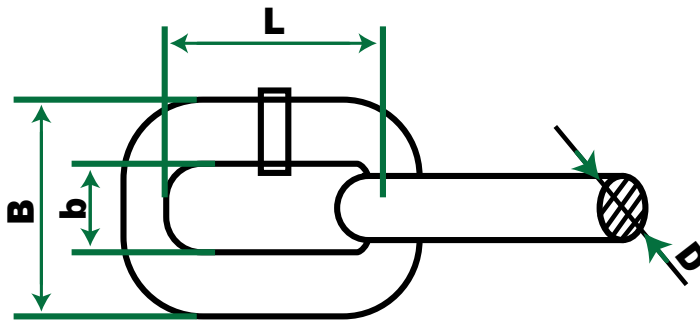

DESCRIPTION

- Standard: DIN 766
- Material: AISI 304/316
- Safety Factor: 4:1
- Anti-corrosion resistant, durability, reliability
- Application: all marine, chemical, medical, food industries etc
- Not applicable for overhead lifting.

304/316 STAINLESS STEEL SHORT LINK CHAIN

SSCHN

Item Code (s)	Chain Size		Pitch			Width		Length per 11 Links		Working Load	Test Force	Min. Breaking Force
	D	tolerance	L	tolerance	Min. b	Max. B	11 L	tolerance				
	mm		mm			mm	mm	mm				
SSCHN04	4	± 0.2	16	+0.3	-0.2	4.8	13.6	176	+0.8	200	5	8
SSCHN05	5	± 0.2	18.5	+0.4	-0.2	6	17	203.5	+0.9	320	8	12.5
SSCHN06	6	± 0.2	18.5	+0.4	-0.2	7.2	20.4	203.5	+0.9	400	10	16
SSCHN07	7	± 0.3	22	+0.4	-0.2	8.4	23.8	242	+1.1	630	16	25
SSCHN08	8	± 0.3	24	+0.4	-0.2	9.6	27.2	264	+1.2	800	20	32
SSCHN09	9	± 0.4	27	+0.5	-0.3	10.8	30.6	297	+1.3	1,000	25	40
SSCHN10	10	± 0.4	28	+0.5	-0.3	12	36	308	+1.4	1,250	32	50
SSCHN11	11	± 0.4	31	+0.5	-0.3	13.2	40	341	+1.5	1,600	40	63
SSCHN13	13	± 0.5	36	+0.6	-0.3	15.6	47	396	+1.7	2,000	50	80
SSCHN14	14	± 0.6	41	+0.7	-0.4	16.8	50	451	+2	2,500	63	100
SSCHN16	16	± 0.6	45	+0.8	-0.4	19.2	58	495	+2.2	3,200	80	125
SSCHN18	18	± 0.9	50	+0.8	-0.4	21.6	65	550	+2.5	4,000	100	160
SSCHN20	20	± 1.0	56	+1	-0.5	24	72	616	+2.8	5,000	125	200




WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

304/316 STAINLESS STEEL LONG LINK CHAIN

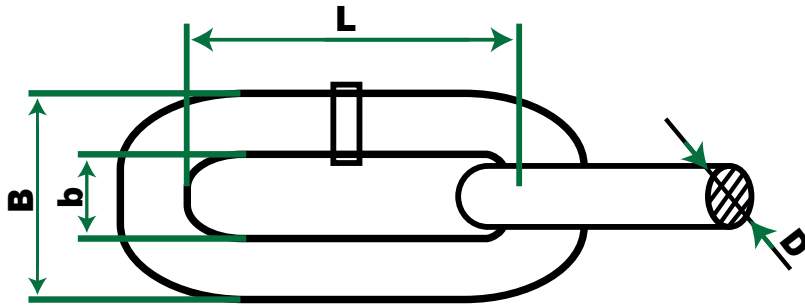

DESCRIPTION

- Standard: DIN 763
- Safety Factor: 4:1
- Material: AISI 304/316
- No-magnetic alloy type chain.
- Anti-corrosion resistant, durability, reliability.

304/316 STAINLESS STEEL LONG LINK CHAIN

SSCHN

Item Code (s)	Nominal Size	Pitch	Internal Width	Working Load Limit	Min. Breaking Force	Weight
	D	L	b			
	mm	mm	mm			
SSCHN02-L	2	22	3.5	25	1,250	6.3
SSCHN02.5-L	2.5	24	4.5	40	2,000	10.1
SSCHN03-L	3	26	5.5	55	3,200	14.8
SSCHN03.5-L	4	32	7	100	6,500	26.7
SSCHN04.5-L	4.5	34	8	128	8,000	37
SSCHN05-L	5	35	9	160	10,000	43.3
SSCHN06-L	6	42	11	200	12,000	62.4
SSCHN07L	7	49	12	300	19,000	84.7
SSCHN08-L	8	52	14	400	25,000	113
SSCHN10-L	10	65	18	630	40,000	177
SSCHN12-L	12	78	22	940	56,500	254
SSCHN13-L	13	82	23	1,000	63,000	302
SSCHN16-L	16	100	30	1,600	100,000	457




WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

G43 ALLOY CHAIN

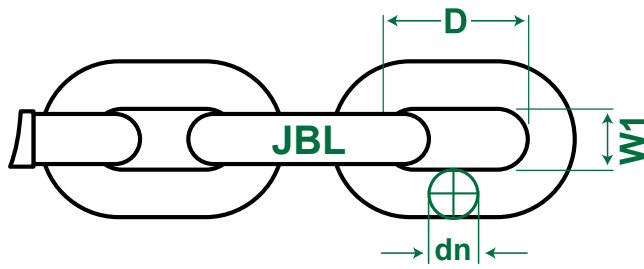

DESCRIPTION & FEATURES

- **Standard:** NACM 2010/ASTM A413
- **Material:** Alloy steel.
- **Factor of safety:** 3 to 1
- **Construction:** Quenched & Tempered.
- **Proof load:** 1.5 X WLL
- **Finish:** Self color.
- Made for heavy-duty trucking, construction, towing, and logging applications.
- Compatible with Grade 43 components.
- Grade 43 & JBL embossed.

G43 ALLOY CHAIN

CHN-G43


Item Code(s)	Nominal Chain Size (dn)		Material Diameter		Working Load Limit Max		Proof Test Min		Minimum Breaking Force		Inside Length Max (D)		Inside Width Min (W1)	
	In	mm	In	mm	lb	kg	lb	kN	lb	kN	In	mm	In	mm
CHN07-G43	1/4	7	0.276	7	2600	1180	3900	17.3	7800	34.6	1.24	31.5	0.38	9.8
CHN09-G43	5/16	8.7	0.343	8.7	3900	1770	5850	26	11700	52	1.29	32.8	0.44	11.2
CHN10-G43	3/8	10	0.406	10.3	5400	2450	8100	36	16200	72	1.38	35	0.55	14
CHN12-G43	7/16	11.9	0.468	11.9	7200	3270	10800	48	21600	96	1.64	41.6	0.65	16.6
CHN13-G43	1/2	13	0.531	13.5	9200	4170	13800	61.3	27600	122.6	1.79	45.5	0.72	18.2
CHN16-G43	5/8	16	0.630	16	13000	5910	19500	86.5	39000	173	2.2	56	0.79	20
CHN20-G43	3/4	20	0.787	20	20200	9180	30300	134.7	60000	269.4	2.76	70	0.98	25
CHN22-G43	7/8	22	0.866	22	24500	11140	36750	163.3	73500	326.6	3.03	77	1.08	27.5



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright© 2024 | www.jblifting.com | All rights reserved

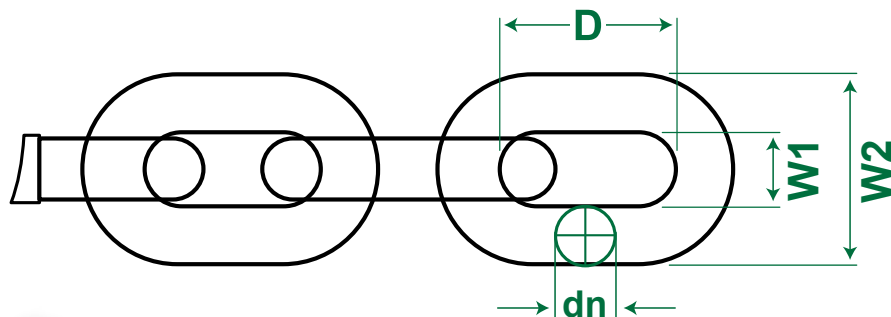

DESCRIPTION

- Standard: EN818-2
- Safety Factor: 4:1
- Proof load: 2.5 X WLL
- Material: Alloy Steel
- Finish: Electrophoresis Or Black
- JB Embossed with marking for identification and traceability.
- Finish: Black quenched and tempered.

G80 ALLOY CHAIN

CHN
G80

ItemCode(s)	Nominal Size	Pitch	External Width	Internal Width	Working Load Limit	Manufacturing Proof Force	Min. Breaking Force
	D	L	B	b			
	mm	mm	mm	mm	t	kN	kN
CHN-04	4	12	13.2	5.2	0.5	12.6	20.1
CHN-05	5	15	16.5	6.5	0.8	19.6	31.4
CHN-06	6	18	21	9	1.1	28.3	45.2
CHN-07	7	21	24	10	1.5	38.5	61.6
CHN-08	8	24	27.5	11.5	2	50.3	80.4
CHN-10	10	30	34.5	14.5	3.2	78.5	126
CHN-13	13	39	45	19	5.3	133	212
CHN-16	16	48	55.5	23.5	8	201	322
CHN-18	18	54	61	25	10	254	407
CHN-19	19	57	64	26	11.2	284	454
CHN-20	20	60	68	28	12.5	314	503
CHN-22	22	66	73.5	29.5	15	380	608
CHN-26	26	78	89	37	21.2	531	849
CHN-32	32	96	112	48	31.5	804	1290



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

RETRACTABLE FALL ARRESTER



DESCRIPTION

Your Partner in Height Safety:

- Maximum Total Arrest Distance=1.8m
- Maximum Free Fall Distance=0.6m
- Maximum Capacity=100kg
- Maximum Fall Arrest Force=6kN
- The JB Lifting retractable fall arrester is a vital piece of equipment for anyone working at heights. It provides essential fall protection while maximizing worker mobility and comfort. Here's what makes the JB Lifting retractable fall arrester stand out

FEATURES

- **Standard** EN 360 : 2002
- **SWR strength** 12kN
- **Retractable Design:** Automatically adjusts lifeline length, providing freedom of movement while minimizing slack.
- **Quick Activation:** Rapid response to sudden falls, arresting the descent almost immediately
- **Compact and Lightweight:** Easy to carry and minimally intrusive, facilitating comfort during use.
- **Durable Construction:** Engineered with polyamide cover for longevity and reliability.
- **Versatile Attachment Points:** Suitable for various anchorage options, enhancing flexibility in use.
- **Visual Indicator:** Clear signals or indicators to show if the device has been activated or needs inspection
- **Compliance:** Meets or exceeds industry safety standards, ensuring reliable fall protection.
- **Ease of Inspection:** Designed for straightforward visual checks and regular maintenance.
- **Integrated Energy Absorber:** Reduces impact forces on the user, enhancing safety during a fall.
- **User-Friendly:** Intuitive design for easy operation, even in stressful situations.



RETRACTABLE FALL ARRESTER

FAR

ItemCode(s)	MATERIAL	WIRE DIAMETER mm	LENGTH m
FAR-03M	Stainless Steel	4.0	3
FAR-06M	Stainless Steel	4.0	6
FAR-10M	Stainless Steel	4.0	10
FAR-15M	Stainless Steel	4.0	15
FAR-20M	Stainless Steel	4.0	20
FAR-25M	Stainless Steel	4.0	25
FAR-30M	Stainless Steel	4.0	30



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright© | www.jblifting.com | All rights reserved

DESCRIPTION

A Lifesaver in Confined Spaces:

- An industrial rescue confined space tripod from JB Lifting is a vital piece of safety equipment designed for confined space emergencies. It acts as a heavy-duty anchor point for retrieval systems, ensuring the safe and efficient rescue of personnel.

FEATURES

- **Material:** Alluminium
- **Standard:** EN765.
- **Robust Construction:** Durable materials ensure stability
- **Adjustable Legs:** Flexibility for various terrains.
- **Compact Design:** Portable and easy to store.
- **Compact Design:** Portable and easy to store.
- **Pulley System:** Enables smooth lifting during rescue.
- **Anchorage Points:** Ensures secure attachment.
- **Adjustable Height:** Adaptable to different spaces.
- **Compliance:** Meets safety standards for rescue operations.
- **High Visibility:** Bright color for easy identification.
- **Quick Setup:** Facilitates swift rescue response.
- **Fast Assembly Under Pressure:** Simple and efficient mechanisms enable rapid deployment even in stressful rescue



INDUSTRIAL SAFETY CONFINED SPACE RESCUE TRIPOD

TRIPOD


Name and Type	JBL- Rescue Tripod	Material	High Strength Aluminium Alloy
Max. Workload (Tripod)	300 kg	Wire Rope Diameter and Length (winch)	5 mm x 20 M
Breaking Strength (Tripod)	500 kg	Gear proportion (winch)	5:1
Total Spread	222 cm	Breaking Force	22 kN
Total Contract	141 cm	Packing Specification	145x40x40 cm
Maximum Lifted Weight	1600 N	Weight	≤30 kg

**WARNING**

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
 Copyright©2024 | www.jblifting.com | All rights reserved

FULL BODY SAFETY HARNESS

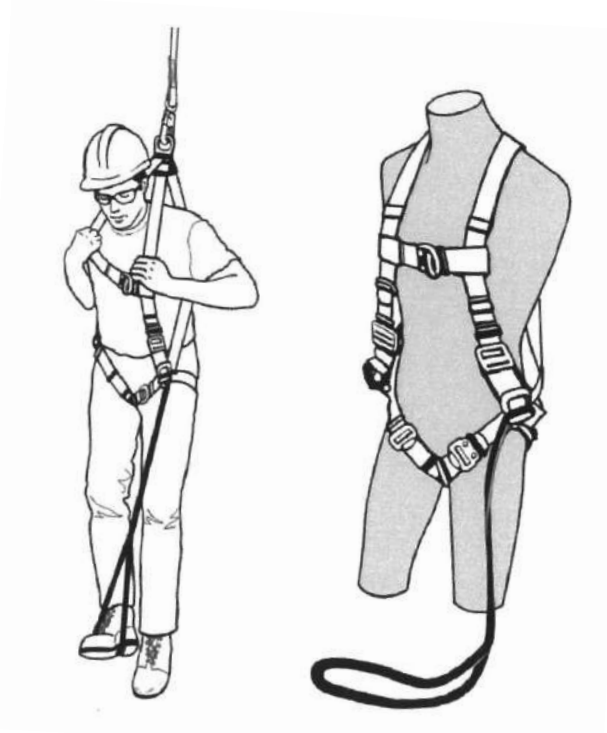

DESCRIPTION & FEATURES

- Standard ANSI Z359.1 – 2020, EN 355, 361, 362
- Capacity 140 kg.
- Non-stretch webbing.
- Highly UV resistant.
- Oil and Dirt-repellent webbing provides excellent resistance from the buildup of Oil and Dirt.
- Aluminum D-rings and Stainless Steel buckles/ Frames provide excellent corrosion resistance.
- Deflects the dust, dirt or any unwanted material that causes abrasion hence is tear and cut-resistant.
- Easy to care for, wipes clean in seconds.
- Increased durability and longevity.
- Reusable PVC bag for easy pack up and carry with and Eco Friendly.



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

CLEVIS SELF LOCKING HOOK



DESCRIPTION & FEATURES

- **Safety factory:** 4:1
- **Material:** G80 alloy steel(quenched and tempered).
- **Proof load:** 2.5 x WLL.
- **Fatigue rated:** 1.5 times of WLL at 20,000 cycles.
- **Finish:** Colour painted.
- **According to standard:** EN1677-3
- **Traceability code:** capacity and WLL embossed.
- 100% MPI tested.
- Magnetic particle testing.
- Designed for coupling with Grade 80 alloy chain for lifting operations.
- Versatile assembly for multipurpose applications.

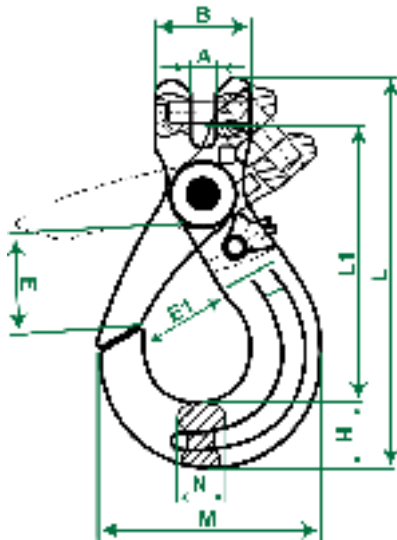

CLEVIS SELF LOCKING HOOK

CSLH

Item No.	WLL/T	BF/T	A mm	B mm	E mm	E1 mm	L1 mm	L mm	H mm	N mm	M mm	Weight/kg kg
6-8	1.12	4.48	8±0.5	32±1	32±2	28±1	99±3	134±3	20±1	15±0.5	73±2	0.45
7/8-8	2	8	9.5±0.5	38.5±1	40±3	35±1	119±3	162±3	26±1	20±0.5	91±2	0.85
10-8	3.15	12.6	12.5±0.5	46±1	48±3	45±2	142±3	195±3	30±1.5	26±1	108±2	1.48
13-8	5.3	21.2	15±0.5	59±1	57±3	52.5±2	179±4	248±4	40±1.5	33±1	142±3	2.85
16-8	8	32	18.5±0.5	77±1.5	65±4	63±2	225±4	310±4	50.5±2	38±2	168.6±3	6
18/20	12.5	50	24±1	81±1.5	82±4	82±3	238±5	335±5	55±2	50±2	185±4	7.5
22-8	15	60	25±1	97.5±2	80±5	76±3	277±5	392±5	67±2	52±2	202±4	12.28
26-8	21.2	84.8	30±1.5	118±2	109±5	96±4	312±6	449±6	75±3	60±3	239±5	21.8
32-8	31.5	126	35±1.5	150±2	131±6	131±4	416±6	590±6	97±3	79.5±3	329±5	46



WARNING


Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

EYE SELF LOCKING HOOK

DESCRIPTION & FEATURES

- Standard: EN1677-3.
- Safety Factor: 4:1.
- Material: GRP Alloy Steel.
- Proof Load: 2.5 x WLL.
- Fatigue Rate: 1.5 Times WLL @ 20000 cycles.
- Finish: Colour painted 100% MPI testing.
- Traceability Code: Capacity and WLL embossed.

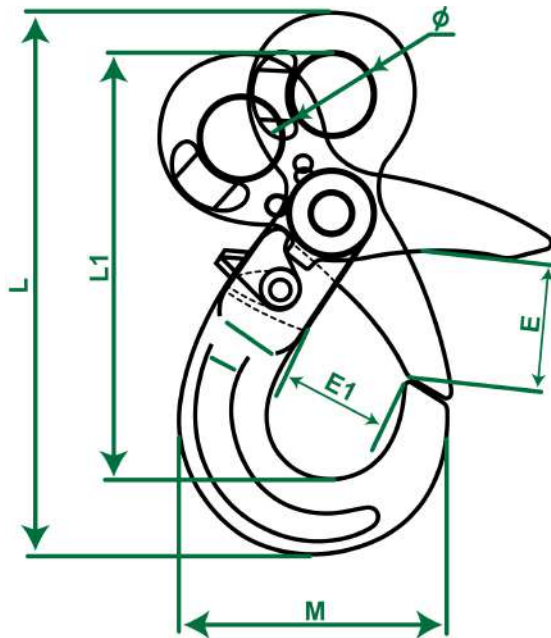

EYE SELF LOCKING HOOK

ESLH

Item Code(s)	Working Load Limit	Breaking Load	$\Phi \pm 1$	$E \pm 2$	$E1 \pm 2$	$L1 \pm 3$	$L \pm 3$	Weight
	tonne	tonne	mm	mm	mm	mm	mm	kg
ESLH06-1T	1.12	4.48	21	35	28	110	141	0.5
ESLH08-2T	2	8	25	40	35	136	175	0.88
ESLH10-3T	3.15	12.6	34.5	50	45	168	214	1.58
ESLH13-5T	5.3	21.2	40	60	52.5	207	268	3
ESLH16-8T	8	32	50	65	63.3	254	332	5.9
ESLH20-12T	12.5	50	64.5	80	86	274.5	332	7
ESLH22-15T	15	60	70	83	76	319	415	12.3
ESLH22-21T	21.2	84.8	80	106	96	362	472	20
ESLH22-31T	31.5	126	105	140	133	470	614	44




WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

DESCRIPTION & FEATURES

- **According to standard:** EN1677
- **Material:** G80 alloy steel(quenched and tempered).
- **Safety factor:** 4:1
- **Proof load:** 2.5 X WLL
- **Finish:** Colour painted.
- Fatigue rated 1.5 times of WLL at 20,000 cycles.
- Used for shortening or holding required length of chain.
- Versatile assembly for multipurpose applications.
- Traceability code, CE, WLL and JBL embossed.

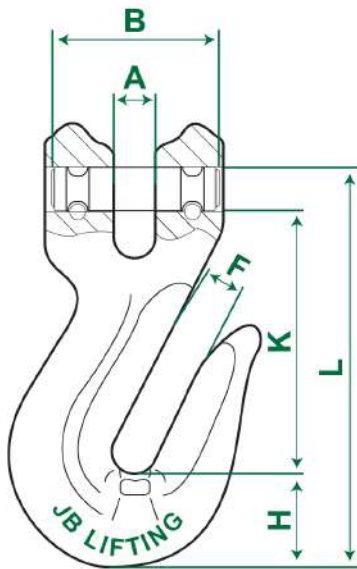

CLEVIS GRAB HOOK

CGK

Item Codes (s)	Working Load Limit	Breaking Load	Dimension						Weight
			A±0.5	F±0.5	B±1.5	H±1	K±2	L±2	
	tonnes	tonnes	mm	mm	mm	mm	mm	mm	
CGK06-1T	1.2	4.8	8	8	34	19.5	57	90.5	0.22
CGK08-1.5T	2	8	9.5	9.5	41	23	65.3	106.5	0.31
CGK10-3T	3.2	12.8	12.7	12.5	46	31	82	137	0.7
CGK13-5T	5.4	21.6	16	16.7	61	43	113	184.5	1.8
CGK16-8T	8.2	32.8	19.5	20	68.5	49	129.5	215	3.1
CGK20-12T	12.8	51.2	24	24	88	58	152	254	4.1
CGK22-15T	15.5	62	27	26	96	64.8	178	295	6.2



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

CLEVIS SLING HOOK



DESCRIPTION & FEATURES

- **Standard:** EN1677
- **Material:** G80 alloy steel(quenched and tempered).
- **Safety factory:** 4:1
- **Proof load:** 2.5 times of WLL.
- **Finish:** Colour painted.
- **Fatigue rated:** 1.5 times of WLL at 20,000 cycles.
- Designed for coupling with Grade 80 alloy chain or wire rope for over head lifting operations.
- Versatile assembly for multipurpose applications.
- CE, Serial number, SWL & JB Lifting (JBL) Mark shown on label and carton.

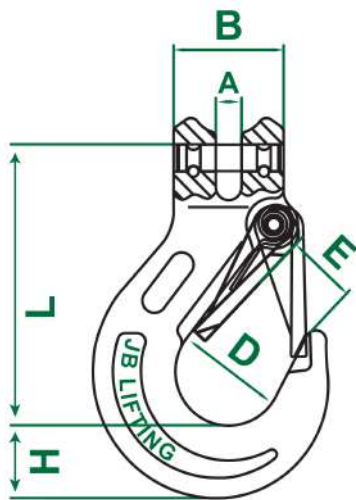

CLEVIS SLING HOOK

CSK

Item Code	Working Load Limit	Breaking Load	A±0.5	B±1.5	D±1.5	H±1	L±2	E±2	Weight
	tonnes	tonnes	mm	mm	mm	mm	mm	mm	kg
CSK06-1T	1.12	4.48	8	32	35	23	76	26	0.32
CSK08-2T	2	8	9.5	37	37	32.5	85.5	29	0.48
CSK10-3T	3.15	12.6	13	49	46	35	104	39	0.95
CSK13-5T	5.3	21.2	16.5	56.5	56	42.5	128	47	1.8
CSK16-8T	8	32	21.5	70.5	60	54	150	55	3.4
CSK20-12T	12.5	50	24	77	79	58	180	61	6
CSK22-15T	15	60	27	91	101	62	213	72	10.4
CSK26-22T	21.2	84.8	30	117	115	75	250	85	14.5
CSK32-31T	31.5	126	35	150	140	88	317	106	27



WARNING


Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright© 2024 | www.jblifting.com | All rights reserved

EYE SLING LATCH HOOK

DESCRIPTION & FEATURES

- **Standard** EN 1677-5
- **Safety Factor** 4:1
- **Proof load:** 2.5 X WLL
- 100% MPI tested.
- Made from durable G80 alloy steel.
- Prioritizes safety.
- Minimizing the risk of accidents or failures during lifting operations.
- Withstand repeated use without compromising performance.
- Ensuring long-lasting reliability.
- CE, Serial number, SWL & JB Lifting (JBL) Mark shown on label and carton.

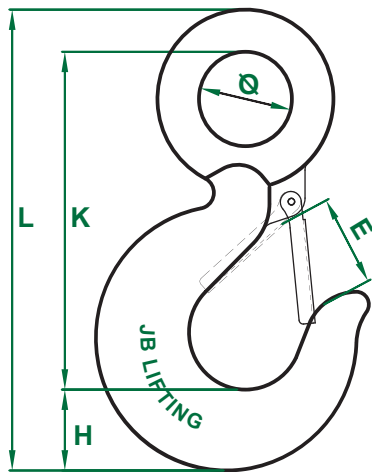

EYE SLING LATCH HOOK

ESK

ITEM CODE	WLL	Breaking Load	$\theta \pm 1$	$E \pm 1.5$	$H \pm 1$	$K \pm 2$	$L \pm 2$	Weight
	tonnes	tonnes	mm	mm	mm	mm	mm	kg
ESK01T	1.12	4.48	19	22	19	80	110	0.28
ESK02T	2	8	28	25	25	103	140.5	0.65
ESK03T	3.15	12.6	31	27.5	28	118	162	0.94
ESK05T	5.3	21.2	39	33	35	145	201	1.95
ESK08T	8	32	51	40	45	180	256	3.77
ESK12T	12.5	50	62	51	57	230	317	6.8
ESK15T	15	60	73	57	70	260	360	9.8
ESK21T	21.2	84.8	89	75	76	318	434	16.25
ESK31T	31.5	126	90	98	91	360	495.5	27.2



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

SORTING PIPE HOOK



DESCRIPTION & FEATURES

- **Material** Alloy steel quenched and tempered
- **Safety Factor** 4:1
- **Long Tapered Body:** Designed to easily slide into and grip the pipe's bore for engagement.
- **Deep Throat:** Provides a wide cradling area to hold the pipe firmly, preventing slippage during lifting.
- **Forged Steel Construction:** Ensures maximum strength and durability for heavy-duty lifting applications.
- **Versatility:** Suitable for lifting pipes of various diameters within its rated capacity.
- **Safe Lifting:** Promotes safe handling of pipes by minimizing the risk of slips or drops.
- **Multiple Sling Leg Compatibility:** Designed to work with multiple sling legs for balanced lifting.
- **Premium Construction:** Crafted from durable G80 alloy steel quenched and tempered.
- The working load at the tip of the hook is 2t.
- Working load at the bottom of the hook is 6.8t
- CE, SWL & JB Lifting (JBL) Mark on the hook.

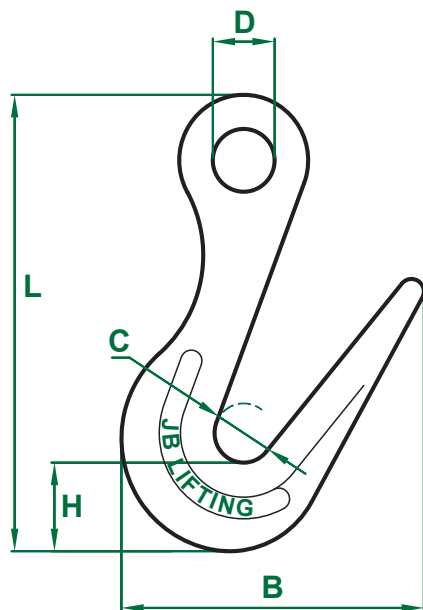

SORTING PIPE HOOK

SRTHK

ItemCode(s)	Working Load Limit at tip of Hook	Working Load Limit at bottom of Hook	Dimensions					Weight
			D	B	C	L	H	
	Tonne	Tonne	mm	mm	mm	mm	mm	kg
SRTHK1.8T	2	6.8	35	170	33	254	49	3.09



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

SWIVEL SLING HOOK



Technical Features

- **Standard** EN 1677-2
- **Safety factor** 4:1
- **Proof load** 2:1
- 100% MPI tested.
- Features a rotating hook.
- Prevents twisting during lifting operations.
- For use with Grade 80 alloy steel chain.
- Used for shortening or holding required length of chain.

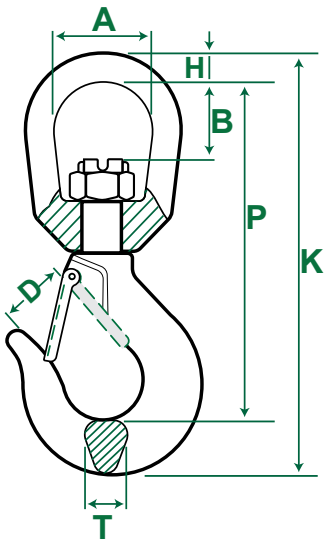

SWIVEL SLING HOOK

SWIVELHK

Item Code(s)	Working Load Limit	Breaking Load	A±1.2	D±1.5	B±1.5	H±1	P±2	K±2.5	T±0.5	Weight
	tonnes	tonnes	mm	mm	mm	mm	mm	mm	mm	kg
SWIVELHK-01T	1.12	4.48	32	22	17	9	109	137	16	0.34
SWIVELHK-02T	2	8	42	21.5	35	15.8	150	192	21	1.02
SWIVELHK-03T	3.15	12.6	42.5	26	35	15.8	162.5	208.5	23	1.24
SWIVELHK-05T	5.3	21.2	48	32.5	39	18	191	246	31	3.6
SWIVELHK-08T	8	32	62	43	53	25	243.5	313	34	4.66
SWIVELHK-12T	12.5	50	68	49.5	51	28.5	276.5	363.5	41.5	7.4
SWIVELHK-15T	15	60	79	54.5	65	32	332	431	55.7	10.6
SWIVELHK-21T	21.2	84.8	105	81	114	40	429.5	545.5	70	21.4
SWIVELHK-31T	31.5	126	105	100	96	40	465.3	596	76.2	32



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

DK SERIES FORK HOOK

DESCRIPTION & FEATURES

- Converts forklift into a mobile crane in seconds.
- Adjustable along the length of the fork.
- Secured to forks by thumb screw.
- Swivel hook includes safety latch.



DK SERIES FORK HOOK

Code	Model	Capacity	Max.Fork Section	Net Weight
		kg	mm	kg
10201	DK10	1000	140*55	14
10202	DK25	2500	148*56	25
10203	DK50	5000	188*76	45



WARNING


Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

LIFTING BEAM CLAMP

DESCRIPTION & FEATURES

- **Standard** EN 13157
- **Materials:** Carbon steel, malleable iron, and forged steel.
- **Safety factor** 2:1
- **Proof load** 1.5 x WLL
- **Application:** Designed for use with beams, girders, and structural components made of steel, concrete, timber, and other materials.
- Lightweight and compact design.
- Exceptional wear-and-tear resistance.
- Special material covering on jaw-blocks.
- Compatible with beams, girders, and structural components made of various materials.

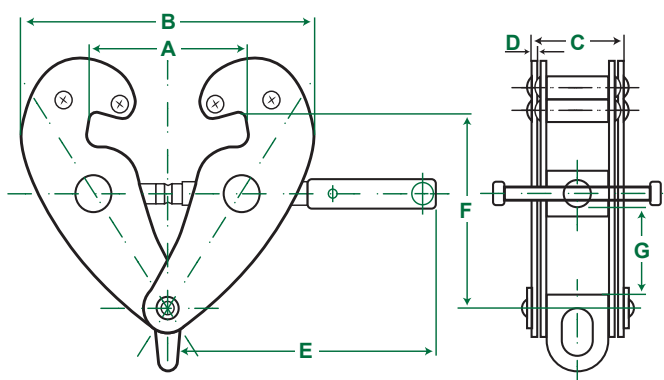

LIFTING BEAM CLAMP

IBC

ItemCode(s)	WLL	Adjustable beam width	Max A	Min B	Max B	C	D	E	Max F	Min F	Min G	Weight
	Tonne	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	Kg
IBC-01T	1000	75 - 220	295	185	400	80	4	225	165	90	25	3.8
IBC-02T	2000	75 - 220	295	185	400	85	6	225	165	90	25	5
IBC-03T	3000	80 - 320	365	240	520	117	8	258	225	135	45	9
IBC-05T	5000	80 - 320	365	240	520	125	10	258	225	135	45	11
IBC-10T	10000	90 - 320	365	255	520	158	12	280	230	160	50	16
IBC-20T	20000	90 - 320	360	295	550	155	16	300	255	200		30



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

PERMANENT MAGNETIC PLATE LIFTER



DESCRIPTION & FEATURES

- **Standard** EN 13155 :20 and ASME B 30.20
- **Safety factor** 3:1
- Efficient lifting and handling operations
- Secure lifting of magnetic materials
- Lightweight and ingeniously structured design
- Ideal for lifting iron docks, cylindrical objects and other magnetic components

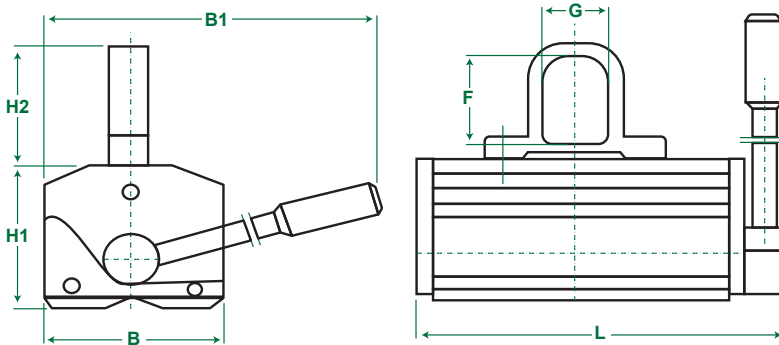

PERMANENT MAGNETIC PLATE LIFTER

MGL

ItemCode(s)	Rated Lifting Strength	L	B	H1	H2	B1	F	G	Dead Weight
	kg	mm	mm	mm	mm	mm	mm	mm	kg
MGL-100	100	136	60	65	45	145	30	21	3
MGL-300	300	205	90	95	70	230	46	36	12
MGL-600	600	276	115	107	80	290	55	45	20
MGL-1000	1000	310	150	140	95	360	60	50	46
MGL-1500	1500	380	166	158	115	450	65	55	72
MGL-2000	2000	425	175	170	115	460	65	55	100

The Main Technical Parameters are Given as Follows

ItemCode(s)	Load Plate Max	Load Round Max	Plate Min Thickness	Round Min-Max Thickness	Work Max. length	Operation Temperature
	kg	kg	mm	mm	mm	°C
MGL-100	100	50	15	25-60	1500	<80
MGL-300	300	150	20	50-100	1500	<80
MGL-600	600	300	30	100-180	2000	<80
MGL-1000	1000	500	40	150-350	2500	<80
MGL-1500	1500	700	50	150-380	3000	<80
MGL-2000	2000	1000	60	180-450	3500	<80



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

VERTICAL PLATE LIFTING CLAMP



DESCRIPTION & FEATURES

- **Standard** EN13155 - 2020
- **Material:** Alloy steel & Carbon steel.
- **Factor of safety** 2:1
- **Proof load** 1.5 x WLL.
- **Construction:** Quenched & tempered.
- **Finish:** Powder coated.
- Main working load 10% WLL.
- Enhanced maneuverability.
- Prevent slipping during lifting.
- Engraved lifting capacity and jaw openings for easy reference.
- CE, Serial number, SWL & JB Lifting (JBL) Mark shown on label and carton.

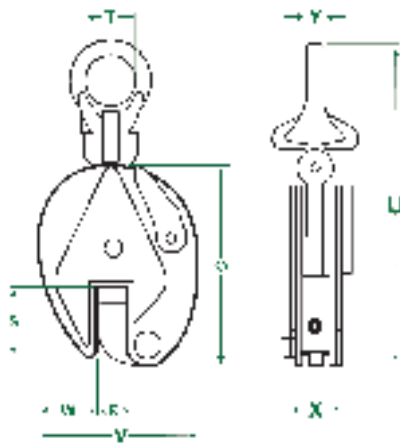

VERTICAL PLATE LIFTING CLAMP

LCA

ItemCode(s)		LCA0.5	LCA01	LCA02	LCA03	LCA05	LCA08	LCA12	LCA16
WLL	Tonne	0.5	1	2	3	5	8	12	16
Test Load	kN	7.35	14.7	29.4	44.1	73.5	117.5	176.4	235.2
Jaw Opening	mm	0-15	0-20	0-25	0-30	0-50	0-45	50-90	60-100
Dimensions	R	mm	17	22	27	32	55	45	90
	S	mm	44	63	76	85	90	112	145
	C	mm	128	167	202	237	262	330	380
	U	mm	212	295	370	418	480	600	700
	T	mm	30	48	60	65	76	85	90
	V	mm	103	138	164	193	232	263	490
	X	mm	36	50	52	78	90	100	113
	W	mm	35	51	56	59	59	77	100
	Y	mm	10	12	16	20	20	22	25
Net weight	kg	1.9	4.5	7.5	14.8	23	37	50	65



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

HORIZONTAL PLATE LIFTING CLAMP



DESCRIPTION & FEATURES

- **Standard** EN 13155.
- **Safety factor** 2.
- **Proof load** 1.5 x WLL.
- minimum working load 0.1 X WLL.
- Prevents slippage during lifting and lowering.
- Secure locking mechanism in both open and closed positions.
- Ideal for steel fabrication, construction sites, shipbuilding, and warehouse operations.
- The versatile design ensures it performs seamlessly in various industrial settings.

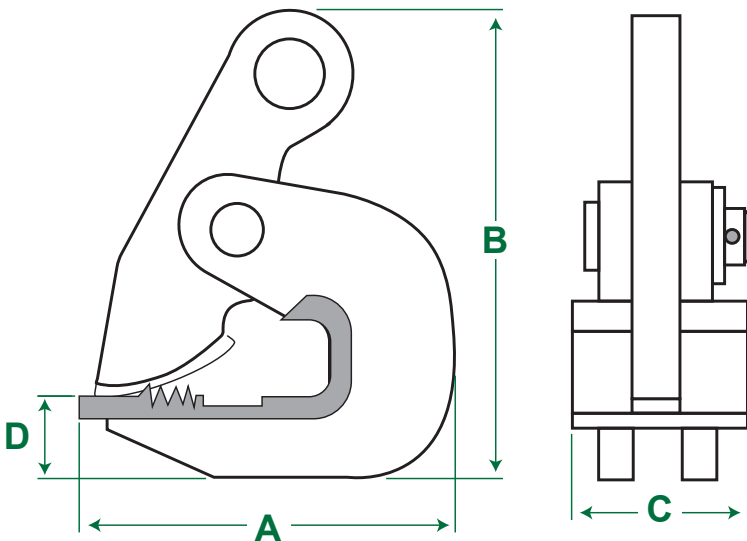

HORIZONTAL PLATE LIFTING CLAMP

LCB

Item Code(s)	Capacity	Test Load	Jaw Opening	Dimensions				Net Weight
	(Tonne)	(kN)	(mm)	A (mm)	B (mm)	C (mm)	D (mm)	(kg)
LCB-0.5T	0.5	7.35	0-25	126	165	50	42	2.5
LCB-01T	1	14.7	0-30	148	205	65	48	3.5
LCB-02T	2	29.4	0-40	172	245	68	58	5
LCB-03T	3	44.1	0-45	180	245	70	58	6
LCB-04T	4	58.8	0-50	180	255	70	58	6.5
LCB-05T	5	73.5	0-55	180	260	74	58	7.5
LCB-06T	6	88.2	0-65	223	308	80	63	10.5
LCB-08T	8	117.6	0-100	282	400	90	96	22
LCB-10T	10	147	0-125	325	510	90	108	33



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

HORIZONTAL PIPE LIFTING CLAMP



DESCRIPTION & FEATURES

- **Standard** EN 13155
- **Safety factor** 2:1
- **Proof load** 1.5 x WLL.
- Teflon-coated surface for durability and smooth operation.
- Compact shape and low weight with high lifting capacity.
- Ideal for horizontal lifting and transportation of steel and concrete pipes.
- Safe and efficient handling during installation, manufacturing, and maintenance.

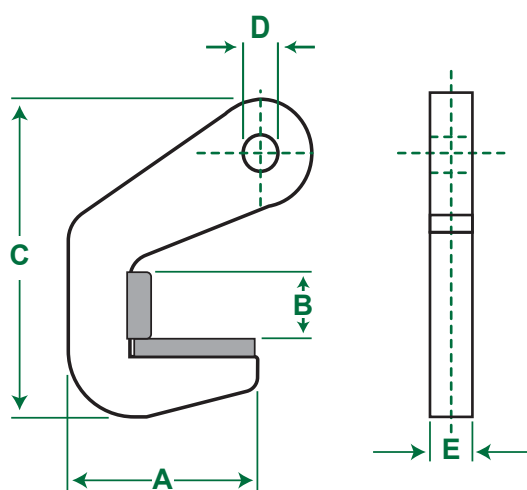

HORIZONTAL PIPE LIFTING CLAMP

PHK

Item code(s)	WLL	Jaw Opening	Dimension				Net weight
			A	B	D	E	
	tonne/pair	mm	mm	mm	mm	mm	Kg
PHK-1.5T	1.6	40	127	40	27	35	1.5
PHK-3T	3.3	40	142	40	27	35	3
PHK-4T	4.4	50	144	50	30	40	4
PHK-6T	6.6	50	152	50	30	40	5
PHK-8T	8.8	70	155	70	30	42	6.7
PHK-12T	13.2	70	175	70	33	46	10
PHK-16T	17.6	70	175	70	40	56	13
PHK-18T	19.8	70	145	70	52	68	15



WARNING


Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

ALLOY STEEL CLEVIS LUG LINK

DESCRIPTION & FEATURES

- Material Grade 80
- Proof load 2.5 X WLL
- 100% MPI tested.
- 20000 times of fatigue testing
- An alloy steel clevis lug link is a robust mechanical connector made from strong alloy steel.
- It consists of a U-shaped clevis with protruding lugs on each end.
- It is commonly used to securely join rods, pipes, or cables.
- CE, Serial number, SWL & JB Lifting (JBL) Mark shown on the product.

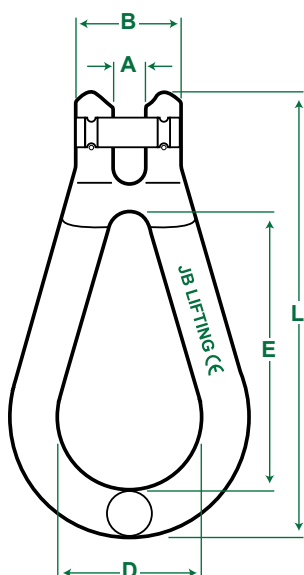

ALLOY STEEL CLEVIS LUG LINK

REL


Item Code	Working Load Limit	Breaking Load	A±0.5	B±1.5	D±1	E±1.5	L±2
	tonnes	tonnes	mm	mm	mm	mm	mm
REL08	2	8	10	32.8	45	87	139
REL10	3.15	12.6	12	42	60	108	174
REL13	5.3	21.2	16.5	55.5	66.5	137.5	228
REL16	8	32	19	68	72	165	264
REL18	10	40	23	73	98	185	317



The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

DESCRIPTION & FEATURES

- **Material:** Alloy steel.
- **Standard:** EN 1677-4
- **Factor of safety:** 4 to 1
- **Construction:** Quenched & tempered.
- **Proof load:** 2.5 X WLL.
- **Finish:** Powder coated.
- Designed for use with steel wire rope or grade 80 alloy steel chain.
- For overhead lifting application.
- CE, SWL & JB Lifting (JBL) Mark shown on the product.

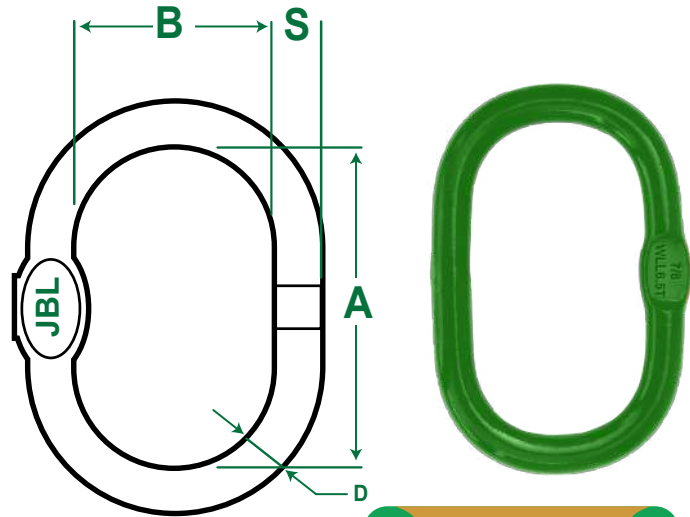

WELDED MASTER LINK

ML

Item Code (s)	Size	Weight/kg	WLL/t	B.L/t	A (mm)	B (mm)	D (mm)		S (mm)
ML01T-93	7/16	0.27	1.6	6.4	100±4	60±4	12±0.5		6±0.5
ML02T-93	1/2	0.38	2.76	11.04	100±4	60±4	14±0.5		7.6±0.5
ML04T-93	11/16	0.85	4	16	160±5	90±4	18±0.5		8.4±0.5
ML06T-93	3/4	1.2	6.5	26	160±5	90±4	20±0.5		10.5±0.5
ML08T-93	7/8	1.63	8.2	32.8	180±5	100±4	22±1		13.5±0.5
ML11T-93	1	2.13	11.5	46	180±5	100±4	25±1		16.5±0.5
ML12T-93	1 1/8	3.81	11.8	47.2	270±6	140±5	28±1		19±0.5
ML16T-93	1 1/4	5.05	16	64	270±6	140±5	32±1		19±0.5
ML21T-93	1-3/8	6.83	21.2	84.8	285±6	155±5	36±1		20±0.5
ML25T-93	1-1/2	8.9	25	100	300±6	160±5	40±1		26±0.5
ML31T-93	1-3/4	12.8	31.5	126	340±7	180±5	45	+1	26±0.5
								-2	
ML45T-93	2	17.3	45	225	390±7	215±6	51	+1	32±0.5
								-2	
ML126-91	"3-1/2"	90.24	126	504	610±10	305±6	89±2		NA



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

WELDED MASTERLINK ASSEMBLY



DESCRIPTION & FEATURES

- **Standard:** EN 1677
- **Material:** Alloy steel.
- **Factor of safety:** 4 to 1
- **Construction:** Quenched & tempered.
- **Proof load:** 2.5 x WLL.
- **Finish:** Powder coated.
- Designed for steel wire rope or grade 80 alloy steel chain.
- Intended for overhead lifting applications.
- Ensures safe and reliable lifting operations.
- Suitable for heavy-duty industrial use.
- CE, Serial number, SWL & JB Lifting (JBL) Mark shown on the prod-

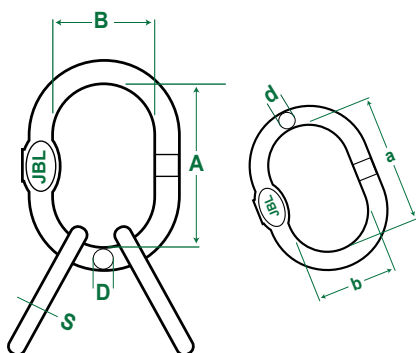

WELDED MASTERLINK ASSEMBLY

MLA

Item Code	Size	Weight/KG	WLL/t	B.L/t	A (mm)	B (mm)	D (mm)	a (mm)	b (mm)	d (mm)	S (mm)
MLA05T-94	3/4	1.95	4.25	17	160±5	90±4	20±0.5	100±4	60±4	14±0.5	7.6±0.5
MLA08T-94	7/8	3.16	6.7	26.8	180±5	100±4	22±1	150±5	70±4	18±0.5	8.4±0.5
MLA10T-94	1	5.28	10	40	270±6	140±5	25±1	155±5	80±4	20±0.5	11±0.5
MLA10T-96	25B	4.45	10	40	190±6	100±4	25±1	150±5	80±4	20±0.5	11±0.5
MLA12T-94	1-1/8	6.75	11.2	44.8	270±6	140±5	28±1	160±5	90±4	22±1	13.5±0.5
MLA12T-96	28B	14.9	12.7	50.8	210±6	110±5	28±1	170±5	90±4	22±1	12±0.5
MLA17T-94	1-1/4	9.31	17.4	68	270±6	140±5	32±1	180±5	100±4	25±1	16.5±0.5
MLA17T-96	38B-S	15	17	68	420	220	38	180	100	25	NA
MLA21T-32	"18-8	18.9	21.2	84	340	180	45	180	100	32	18.5±0.5
MLA21T-92	"1-1/2	12.91	21.3	85.2	267±6	135±5	38	180±5	100±4	30±1	NA
MLA25T-94	1-1/2	18.4	25	34.4	300±6	160±5	40±1	270±6	140±5	32±1	19±0.5
MLA31T-94	1-3/4	26.6	31.5	126	340±7	180±5	45 ⁺¹ ₋₂	285±6	155±5	36±1	22±0.5
MLA45T-94	2	42.91	45	180	350±7	190±5	51±2	340±7	180±5	45±1	25±0.5
MLA67t-92	2	94.1	67	268	406±10	241±6	70±2	406±10	203±6	60±1	NA



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

DRUM LIFTER CHAIN SLING



DESCRIPTION & FEATURES

- **Purpose:** Designed for lifting and handling steel drums of various sizes.
- **Versatility:** Can lift drums horizontally or vertically by attaching claw ends to the rim with an automatic gripping mechanism.
- **Capacity:** Can lift up to 1000kg, ensuring safe operation without exceeding the weight limit.
- **Advantages:** Light and compact, making it easy to store when not in use.
- **Applications:** Suitable for use in factories and shipping for lifting steel drums whenever needed.
- **Benefit:** Provides a convenient and efficient solution for handling heavy drums in various industries.
- CE, SWL & JB Lifting (JBL) Mark shown on the product.

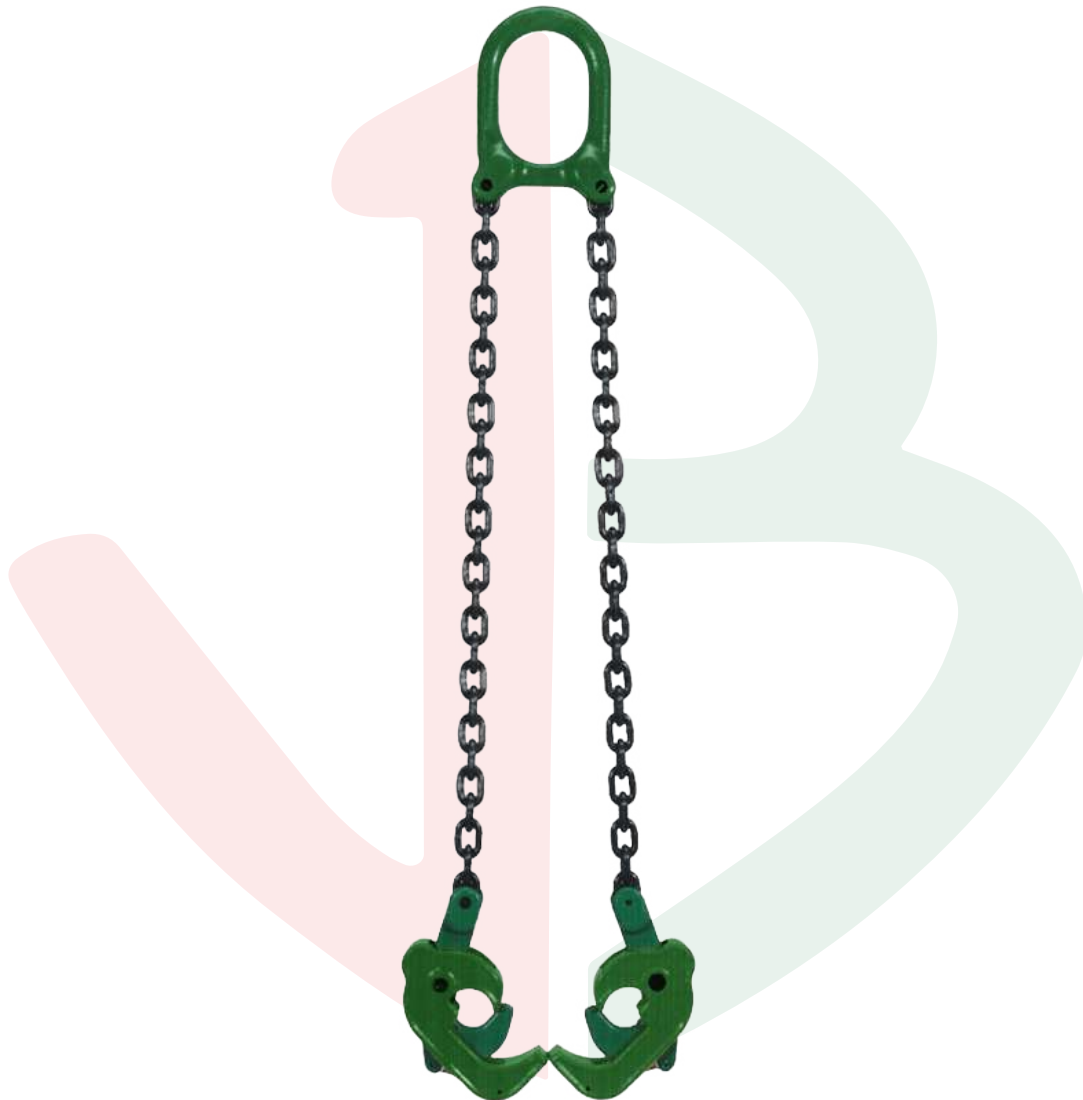

WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved




CONCRETE LIFTING LOOP



DESCRIPTION & FEATURES

- **Materials:** Made of durable high-strength steel wire materials.
- **Safety:** Meets and exceeds standards to prevent accidents during handling.
- **Purpose:** Facilitates lifting and handling of heavy concrete elements in construction.
- **Attachment:** Attached securely during casting for crane attachment.
- **Load-bearing:** Engineered for heavy loads, ensuring safe transportation.
- **Certification:** Rigorously tested and certified for quality and compliance.
- **Contribution:** Enhances productivity and minimizes risks in construction.
- **Integrity:** Maintains structural stability during transportation and positioning.
- **Durability:** Withstands harsh construction site conditions.
- **Significance:** Crucial for safe and efficient construction practices.
- CE, Serial number, SWL & JB Lifting (JBL) Mark shown on the product.

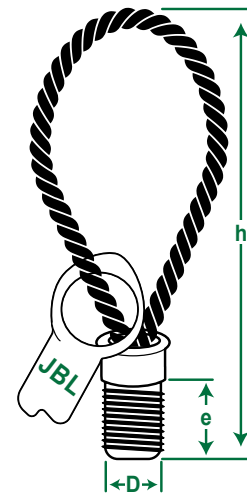

CONCRETE LIFTING LOOP

LPRD

ItemCode(s)	Thread Finished	WLL 0 to 45° Tonne	Dimensions		
			D mm	e mm	h mm
LPRD12	Rd 12	0.5	12	20	155
LPRD14	Rd 14	0.8	14	22	155
LPRD16	Rd 16	1.2	16	23	155
LPRD18	Rd 18	1.6	18	28	190
LPRD20	Rd 20	2	20	30	215
LPRD24	Rd 24	2.5	24	34	255
LPRD30	Rd 30	4	30	47	300
LPRD36	Rd 36	6.3	36	55	340
LPRD42	Rd 42	8	42	61	425
LPRD52	Rd 52	12.5	52	79	550



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

CONCRETE LIFTING SOCKET



DESCRIPTION & FEATURES

- **Safety:** Engineered to meet strict safety and load-bearing standards.
- **Purpose:** Facilitates secure lifting of concrete elements, especially precast components.
- **Embedding:** Embedded or cast into concrete during manufacturing for permanent attachment.
- **Attachment:** Provides a robust connection point for cranes or lifting equipment.
- **Contribution:** Essential for efficient and safe material handling and installation.
- **Reliability:** Ensures secure handling of substantial concrete components.
- **Efficiency:** Facilitates precise and safe lifting and transportation on construction sites.
- **Durability:** Designed to withstand the demands of construction environments.
- **Standard Compliance:** Meets industry standards for quality and performance.
- **Essential Role:** Crucial for ensuring the success and safety of construction projects.
- CE, Serial number, SWL & JB Lifting (JBL) Mark shown on the product.

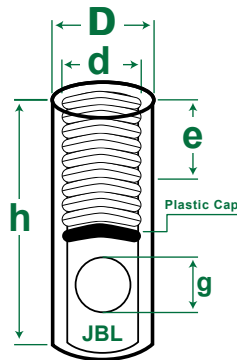

CONCRETE LIFTING SOCKET

SKRD

ItemCode(s)	Thread Finished	WLL Tonne	Dimensions			
	d		D	g	h	e
	mm		mm	mm	mm	mm
SKRD-12	Rd 12	0.5	15	8	40	22
SKRD-14	Rd 14	0.8	18	10	47	25
SKRD-16	Rd 16	1.2	21	13	54	27
SKRD-18	Rd 18	1.6	24	13	65	34
SKRD-20	Rd 20	2	27.2	15	69	35
SKRD-24	Rd 24	2.5	31	18	78	43
SKRD-30	Rd 30	4	40	22	103	56
SKRD-36	Rd 36	6.3	47	27	125	68
SKRD-42	Rd 42	8	54	32	145	80
SKRD-52	Rd 52	12.5	67.2	40	195	100



WARNING


Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

TURNBUCKLE GALVANIZED EYE AND EYE

DESCRIPTION & FEATURES

- **Standard:** DIN1480
- **Component Description:** Made of galvanized steel, it has two threaded eye ends connected by a central body with internal threads.
- **Function:** Acts as a tensioning device for cables, wires, and ropes by allowing precise length adjustments.
- **Applications:** Widely used in construction, rigging, and marine settings for securing and tensioning various materials.
- **Attachment Points:** Provides secure attachment points for rigging and fastening tasks.
- **Adjustability:** The central body can be rotated to tighten or loosen the eye connections, offering adaptability in different scenarios.
- **Durability:** Galvanized steel construction enhances corrosion resistance and ensures reliable performance.
- **Importance:** Crucial for maintaining tension, stability, and safety in industrial applications requiring precise tensioning and secure connections.
- CE, Serial number, SWL & JB Lifting (JBL) Mark shown on the product.

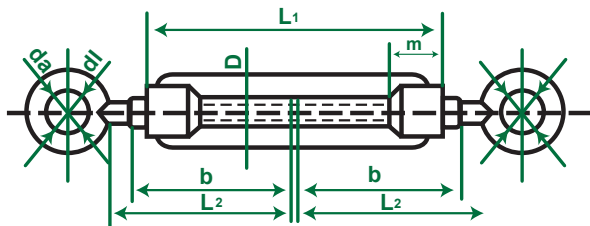

TURNBUCKLE GALVANIZED EYE AND EYE

SSTB

Item Code (s)	WLL kg	Size	Dimensions							Weight kg
			D mm	L1 mm	M mm	L2 mm	b mm	di mm	da mm	
SSTB-EH06	230	M6	6	110	10	60	53	10	20	0.095
SSTB-EH08	418	M8	8	110	14	60	55	12	26	0.165
SSTB-EH10	663	M10	10	125	20	65	60	14	30.5	0.029
SSTB-EH12	948	M12	12	125	21	75	70	18	37.5	0.043
SSTB-EH16	1804	M16	16	170	27	100	90	22	48	0.092
SSTB-EH20	2752	M20	20	200	34	115	100	25	51	1.63
SSTB-EH24	3996	M24	24	255	39	140	130	28	66	2.2
SSTB-EH30	6371	M30	30	255	45	145	130	35	83	3
SSTB-EH32	6585	M32	32	295	55	160	150	36.5	88	4.6
SSTB-EH36	9276	M36	36	295	55	160	150	44	104	7.68
SSTB-EH38	9572	M38	38	330	63	185	170	42	104	12.9



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

TURNBUCKLE GALVANIZED EYE AND HOOK



DESCRIPTION & FEATURES

- **Standard:** DIN1480
- **Versatile Design:** Turnbuckle with galvanized eye and hook for various rigging tasks.
- **Corrosion Resistance:** Made from galvanized steel for durability in harsh environments.
- **Tension Adjustment:** Allows precise length adjustments for cables and ropes.
- **Secure Attachments:** Eye and hook ends provide stable connections.
- **Common Uses:** Ideal for construction, rigging, and marine applications.
- **Easy Maintenance:** Requires minimal upkeep due to corrosion-resistant materials.
- **Durable and Reliable:** Ensures long-term performance in demanding conditions.

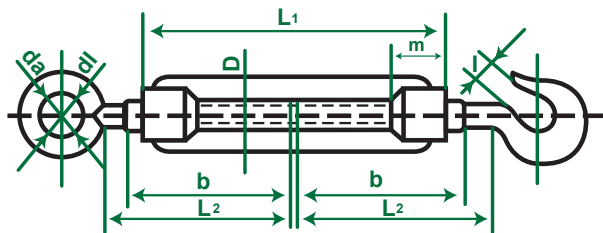

TURNBUCKLE GALVANIZED EYE AND HOOK

SSTB

Item Code (s)	WLL kg	Size	Dimensions								Weight kg
			D mm	L1 mm	M mm	L2 mm	b mm	di mm	da mm	l mm	
SSTB-EH06	230	M6	6	110	10	60	53	10	20	4.5	0.095
SSTB-EH08	418	M8	8	110	14	60	55	12	26	6.5	0.165
SSTB-EH10	663	M10	10	125	20	65	60	14	30.5	8	0.029
SSTB-EH12	948	M12	12	125	21	75	70	18	37.5	10.5	0.043
SSTB-EH16	1804	M16	16	170	27	100	90	22	48	13	0.092
SSTB-EH20	2752	M20	20	200	34	115	100	25	51	20	1.63
SSTB-EH24	3996	M24	24	255	39	140	130	28	66	27	2.2
SSTB-EH30	6371	M30	30	255	45	145	130	35	83	31	3
SSTB-EH32	6585	M32	32	295	55	160	150	36.5	88	33	4.6
SSTB-EH36	9276	M36	36	295	55	160	150	44	104	40	7.68
SSTB-EH38	9572	M38	38	330	63	185	170	42	104	39	12.9



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

TURNBUCKLE GALVANIZED HOOK AND HOOK



DESCRIPTION & FEATURES

- **Design:** Two ends with hooks for versatile rigging.
- **Material:** Made from galvanized steel for corrosion resistance.
- **Function:** Tensions cables, wires, and ropes with precise adjustments.
- **Applications:** Used in construction, rigging, and marine settings.
- **Attachment Points:** Offers dual secure attachment points for reliable tensioning.
- **Quick Connections:** Facilitates fast and dependable connections.
- **Low Maintenance:** Requires minimal upkeep due to durable materials.
- CE, SWL & JB Lifting (JBL) Mark shown on the product.

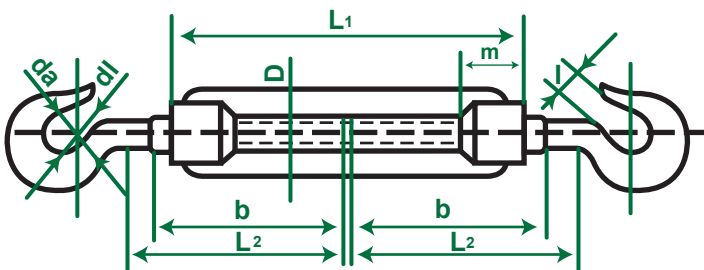

TURNBUCKLE GALVANIZED HOOK AND HOOK

SSTB

Item Code (s)	WLL kg	Size	Dimensions						Weight kg
			D mm	L1 mm	M mm	L2 mm	b mm	l mm	
SSTB-EH06	230	M6	6	110	10	60	53	4.5	0.095
SSTB-EH08	418	M8	8	110	14	60	55	6.5	0.165
SSTB-EH10	663	M10	10	125	20	65	60	8	0.029
SSTB-EH12	948	M12	12	125	21	75	70	10.5	0.043
SSTB-EH16	1804	M16	16	170	27	100	90	13	0.092
SSTB-EH20	2752	M20	20	200	34	115	100	20	1.63
SSTB-EH24	3996	M24	24	255	39	140	130	27	2.2
SSTB-EH30	6371	M30	30	255	45	145	130	31	3
SSTB-EH32	6585	M32	32	295	55	160	150	33	4.6
SSTB-EH36	9276	M36	36	295	55	160	150	40	7.68
SSTB-EH38	9572	M38	38	330	63	185	170	39	12.9



! WARNING Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

G80 EYE BOLT

DESCRIPTION & FEATURES

- **High Load Capacity:** G80 lifting eye bolts are designed to handle significant loads, with capacity ratings clearly specified based on the bolt size and material.
- **Threaded Shank:** These eye bolts feature a threaded shank for secure attachment to various surfaces, ensuring a strong and stable lifting point.
- **Forged Steel Construction:** Made from high-quality forged steel, G80 lifting eye bolts offer excellent durability and resistance to wear.
- **Compliance with Standards:** Manufactured according to G80 standards, these lifting eye bolts ensure consistent quality and performance.

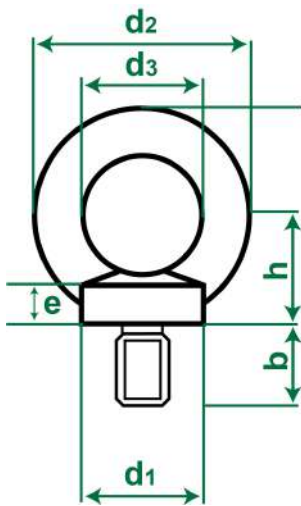

G80 EYE BOLT

EB

Item Code(s)	WLL Tonnes	Dimensions							Unit Weight kg
		d1 mm	d2 mm	d3 mm	b mm	e mm	h mm	k mm	
EB06	0.07	17	36	16	13	6	17	6	0.050
EB08	0.14	20	45	20	15	6	18	8	0.060
EB10	0.23	25	54	25	18	8	22	10	0.110
EB12	0.34	30	63	30	22	10	26	12	0.180
EB14	0.49	35	63	35	28	12	30	14	0.285
EB16	0.7	35	72	35	28	12	30	14	0.280
EB20	1.2	40	81	40	30	12	35	16	0.450
EB22	1.5	45	81	45	35	14	40	18	0.670
EB24	1.8	50	90	50	38	16	45	20	0.780
EB27	2.5	50	90	50	38	18	45	20	0.880
EB30	3.6	65	108	60	45	18	55	24	1.660
EB33	4.3	65	108	60	45	22	55	24	1.720
EB38	5.1	75	126	70	55	22	65	28	2.650
EB38	6.1	75	126	70	55	26	65	28	2.800
EB42	7	85	144	80	65	30	75	32	4.030
EB45	8	85	144	80	65	30	75	32	4.250
EB48	8.6	100	166	90	70	35	85	38	8.380
EB52	9.9	100	166	90	70	35	85	38	6.600
EB56	11.5	110	184	100	80	38	95	42	8.800
EB64	16	120	206	110	90	42	100	48	12.400



WARNING


Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

G80 Eye Nut

DESCRIPTION & FEATURES

- **Secure Lifting Point:** G80 lifting eye nuts provide a reliable attachment point for lifting and hoisting, designed to accommodate various load angles.
- **Forged Steel Construction:** Crafted from high-grade forged steel, these eye nuts are highly durable and capable of withstanding heavy loads and harsh conditions.
- **Threaded Hole:** They feature an internally threaded hole that allows for easy attachment to threaded studs or bolts, offering flexibility in lifting applications.
- **Standard Compliance:** G80 lifting eye nuts are manufactured in accordance with DIN standards, ensuring they meet stringent safety.

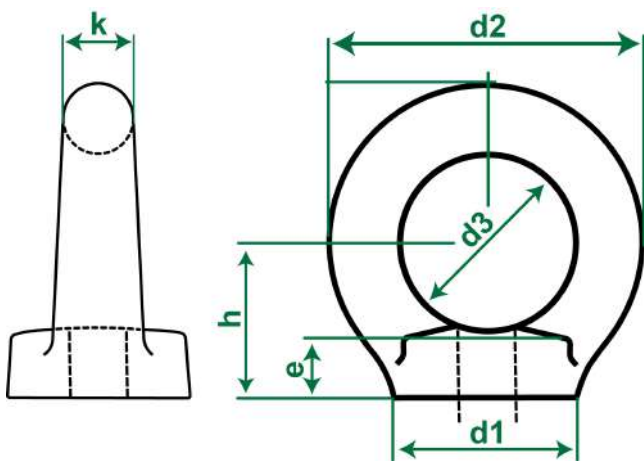

G80 EYE NUT

EN

Item Codes (s)	WLL Tonnes	Dimensions						Unit Weight kg
		d1 mm	d2 mm	d3 mm	e mm	h mm	k mm	
EN06	0.07	20	36	20	8.5	18	8	0.05
EN08	0.14	20	36	20	8.5	18	8	0.05
EN10	0.23	25	45	25	10	22	10	0.09
EN12	0.34	30	54	30	11	26	12	0.16
EN16	0.7	35	63	35	13	30	14	0.24
EN20	1.2	40	72	40	16	35	16	0.36
EN22	1.5	45	81	45	18	40	18	0.58
EN24	1.8	50	90	50	20	45	20	0.72
EN27	2.5	50	90	50	20	45	20	0.70
EN30	3.6	65	108	60	25	55	24	1.32
EN33	4.3	65	108	60	25	55	24	1.30
EN36	5.1	75	126	70	30	65	28	2.08
EN39	6.1	75	126	70	30	65	28	2.02
EN42	7	85	144	80	35	75	32	3.11
EN45	8	85	144	80	35	75	32	3.04
EN48	8.6	100	166	90	40	85	38	5.03
EN52	9.9	100	166	90	40	85	38	4.95
EN56	11.5	110	184	100	45	95	42	6.70
EN64	16	120	206	110	50	105	48	9.31



WARNING


Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

US Type Turnbuckle Eye & Eye

DESCRIPTION & FEATURES

- **Functions:** Turnbuckles recommended for straight or in-line pull only.
- **Construction:** End fittings are quenched and tempered, bodies heat treated by normalizing.
- **Proof load:** Tested at 2.5 times of WLL.
- **Safety factor:** 5:1
- **Fatigue:** Tested at 1.5 times of WLL.
- **Standard:** Federal Specifications FF-T791b.

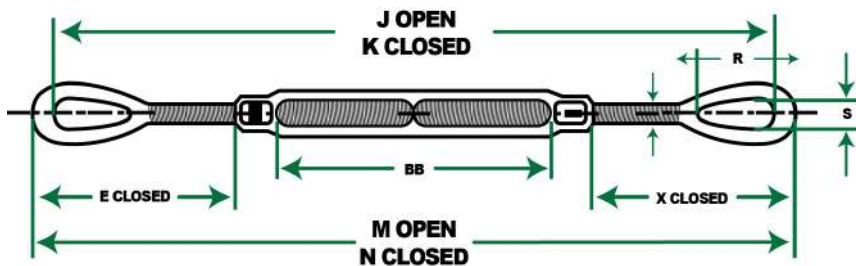

US TYPE TURNBUCKLE EYE & EYE

Thread DIA & Take Up		WLL (T)	WEIGHT (KG)	Dimension (MM)								
(IN)	(MM)			A	J	K	M	N	R	S	X	BB
1/4 x 4	6.35 x 102	0.23	0.13	6.35	303	202	314	213	20.6	8.64	44.6	103
5/16 x 4-1/2	7.94 x 114	0.36	0.22	7.94	354	239	368	253	24.1	11.2	55.8	116
3/8 x 6	9.53 x 152	0.54	0.34	9.53	446	294	463	311	28.7	13.5	62.9	155
1/2 x 6	12.7 x 152	1	0.78	12.7	506	354	529	376	35.8	18	90.4	153
1/2 x 12	12.7 x 305	1	1.19	12.7	819	514	841	536	35.8	18	89.9	314
5/8 x 6	15.9 x 152	1.59	1.25	15.9	552	399	577	425	45.7	22.4	110	153
5/8 x 12	15.9 x 305	1.59	1.87	15.9	865	560	891	586	45.7	22.4	110	315
3/4 x 6	19.1 x 152	2.36	1.91	19.1	590	438	622	470	53.1	25.4	130	156
3/4 x 12	19.1 x 305	2.36	2.78	19.1	905	600	937	632	53.1	25.4	129	320
3/4 x 18	19.1 x 457	2.36	3.55	19.1	1210	753	1242	785	53.1	25.4	130	471
7/8 x 12	22.2 x 305	3.27	4.01	22.2	932	627	970	665	60.5	31.8	147	309
7/8 x 18	22.2 x 457	3.27	5.22	22.2	1249	792	1287	830	60.5	31.8	147	473
1x6	25.4 x 152	4.54	4.36	25.4	666	514	711	559	76.2	36.3	165	157
1x12	25.4 x 305	4.54	5.88	25.4	971	666	106	711	76.2	36.3	165	309
1 x 18	25.4 x 457	4.54	7.4	25.4	1276	819	1321	864	76.2	36.3	165	473
1x 24	25.4 x 610	4.54	9.14	25.4	1596	987	1641	1031	76.2	36.3	165	631
1-1/4 x 12	31.8 x 305	6.89	9.01	31.8	1070	766	1127	822	91.2	46.2	216	306
1-1/4 x 18	31.8 x 457	6.89	10.8	31.8	1375	918	1432	975	91.2	46.2	216	462
1-1/4 x 24	31.8 x 610	6.89	12.6	31.8	1694	1085	1751	1141	91.2	46.2	216	625
1-1/2 x 12	38.1 x 305	9.71	13	38.1	1124	819	1187	882	104	53.8	240	313
1-1/2 x 18	38.1 x 457	9.71	15.4	38.1	1428	971	1492	1035	104	53.5	240	465
1-1/2 x 24	38.1 x 610	9.71	17.9	38.1	1749	1139	1813	1203	104	53.5	240	633
1-3/4 x 18	44.5 x 457	12.7	23	44.5	1457	1000	1534	1076	118	60.5	253	467
1-3/4 x 24	44.5 x 610	12.7	26.4	44.5	1762	1153	1838	1229	118	60.5	253	619
2 x 24	51.0 x 610	16.8	37.9	50.8	1922	1313	2011	1402	148	68.3	331	622
2-1/2 x 24	63.5 x 610	27.2	67.4	63.5	2011	1402	2113	1503	165	79.2	350	625
2-3/4 x 24	70.0 x 610	34	79.1	69.9	2066	1456	2180	1571	178	82.6	383	626



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

US Type Turnbuckle Eye & Hook



DESCRIPTION & FEATURES

- **Functions:** Turnbuckles recommended for straight or in-line pull only.
- **Construction:** End fittings are quenched and tempered, bodies heat treated by normalizing.
- **Proof load:** Tested at 2.5 times of WLL.
- **Safety factor:** 5:1
- **Fatigue:** Tested at 1.5 times of WLL.
- **Standard:** Federal Specifications FF-T791b.

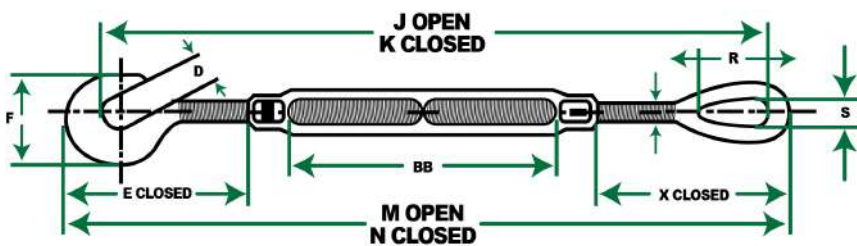

US TYPE TURNBUCKLE EYE & HOOK

Thread DIA & Take Up		WLL (T)	WEIGHT (KG)	Dimension (MM)								
(IN)	(MM)			D	E	F	J	K	M	N	X	BB
1/4 x 4	6.35 x 102	0.18	0.14	11.2	42.3	32.3	296	195	312	211	44.6	103
5/16 x 4-1/2	7.94 x 114	0.32	0.23	12.7	50.7	38.1	343	229	363	248	55.8	116
3/8 x 6	9.53 x 152	0.45	0.36	14.2	57.8	44.7	434	282	458	306	62.9	155
1/2 x 6	12.7 x 152	0.68	0.82	16.5	89.7	57.9	497	345	528	376	90.4	153
1/2 x 12	12.7 x 305	0.68	1.22	16.5	89.7	57.9	809	504	840	535	89.9	314
5/8 x 6	15.9 x 152	1.02	1.35	22.9	108	71.4	536	384	574	422	110	153
5/8 x 12	15.9 x 305	1.02	1.97	22.9	108	71.4	850	545	888	583	110	315
3/4 x 6	19.1 x 152	1.36	1.91	24.9	128	84.6	574	422	621	469	130	156
3/4 x 12	19.1 x 305	1.36	2.96	24.9	128	84.6	889	584	936	631	130	320
3/4 x 18	19.1 x 457	1.36	3.74	24.9	128	84.6	1194	737	1241	784	130	471
7/8 x 12	22.2 x 305	1.81	4.24	28.7	148	96	917	612	971	666	147	309




The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

US Type Turnbuckle Hook & Hook



DESCRIPTION & FEATURES

- **Functions:** Turnbuckles recommended for straight or in-line pull only.
- **Construction:** End fittings are quenched and tempered, bodies heat treated by normalizing.
- **Proof load:** Tested at 2.5 times of WLL.
- **Safety factor:** 5:1
- **Fatigue:** Tested at 1.5 times of WLL.
- **Standard:** Federal Specifications FF-T791b.

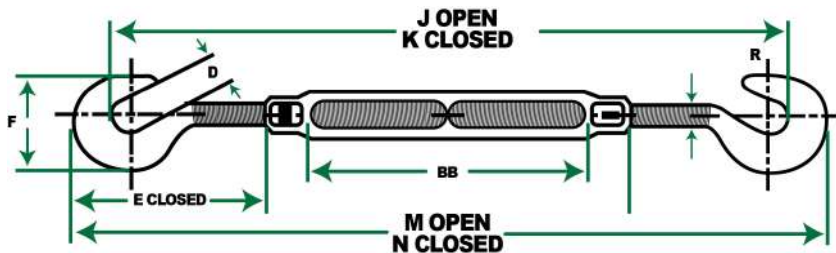

US TYPE TURNBUCKLE HOOK & HOOK

Thread DIA & Take Up		WLL (T)	WEIGHT (KG)	Dimension (MM)								
(IN)	(MM)			A	D	E	F	J	K	M	N	BB
1/4 x 4	6.35 x 102	0.18	0.15	6.35	11.2	42.3	32.3	249	187	310	208	103
5/16x4-1/2	7.94 x 114	0.32	0.24	7.94	12.7	50.7	38.1	294	218	358	243	116
3/8 x6	9.53 x 152	0.45	0.38	9.53	14.2	57.8	44.7	387	270	453	301	155
1/2 x 6	12.7 x 152	0.68	0.85	12.7	16.5	89.7	57.9	457	335	5273	375	153
1/2 x 12	12.7 x 305	0.68	1.26	12.7	16.5	89.7	57.9	769	495	839	5 535	314
5/8 x 6	15.9 x 152	1.02	1.46	15.9	22.9	108	71.4	495	368	572	419	153
5/8 x 12	15.9 x 305	1.02	2.08	15.9	22.9	108	71.4	809	529	885	580	315
3/4 x 6	19.1 x 152	1.36	1.91	19.1	24.9	128	84.6	538	406	620	467	156
3/4 x 12	19.1 x 305	1.36	3.14	19.1	24.9	128	84.6	853	568	935	630	320
3/4 x 18	19.1 x 457	1.36	3.92	19.1	24.9	128	84.6	1158	721	1240	782	471
7/8 x 12	22.2 x 305	1.81	4.47	22.2	28.7	148	96	886	597	972	667	309
1 x 12	25.4 x 305	2.27	6.70	25.4	31.8	167	108	959	637	1019	714	309



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

US Type Turnbuckle Jaw & Eye



DESCRIPTION & FEATURES

- **Functions:** Turnbuckles recommended for straight or in-line pull only.
- **Construction:** End fittings are quenched and tempered, bodies heat treated by normalizing.
- **Proof load:** Tested at 2.5 times of WLL.
- **Safety factor:** 5:1
- **Fatigue:** Tested at 1.5 times of WLL.
- **Standard:** Federal Specifications FF-T791b.

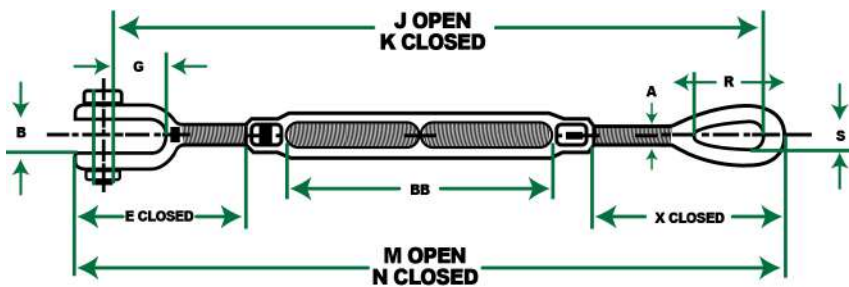

US TYPE TURNBUCKLE JAW & EYE

Thread DIA & Take Up		WLL (T)	WEIGHT (KG)	Dimension (MM)								
(IN)	(MM)			D	E	F	J	K	M	N	X	BB
1/4 x 4	6.35 x 102	0.23	0.15	11.4	42	16.1	294	192	312	210	44.6	103
5/16 x 4-1/2	7.94 x 114	0.36	0.24	12.7	51.2	22	342	228	363	249	55.8	116
3/8 x 6	9.53 x 152	0.54	0.36	13.5	53.5	21.5	429	277	454	301	62.9	155
1/2 x 6	12.7 x 152	1	0.8	16.3	81.8	27.1	490	338	520	368	90.4	153
1/2 x 12	12.7 x 305	1	1.02	16.3	81.8	27.1	650	421	680	451	89.9	238
5/8 x 6	15.9 x 152	1.59	1.21	16.3	81.8	27.1	802	497	832	528	89.9	314
5/8 x 12	15.9 x 305	1.59	1.35	20.1	99.1	33.5	527	374	566	413	110	153
3/4 x 6	19.1 x 152	2.36	1.69	20.1	98.8	33.5	688	459	727	498	110	239
3/4 x 12	19.1 x 305	2.36	1.97	20.1	98.8	33.5	840	535	879	574	110	315
3/4 x 18	19.1 x 457	2.36	2.05	24.6	120	38.5	563	411	612	459	130	156
7/8 x 12	22.2 x 305	3.27	2.52	24.6	119	38.5	726	479	774	546	130	244
7/8 x 18	22.2 x 457	3.27	2.91	24.6	119	38.5	878	573	927	622	130	320
1x6	25.4 x 152	4.54	3.69	24.6	120	38.5	1183	726	1232	774	130	471
1 x 12	25.4 x 305	4.54	4.13	29.5	140	44.8	906	601	963	658	147	309
1 x 18	25.4 x 457	4.54	5.28	29.5	140	44.8	1223	766	1280	822	147	473
1 x 24	25.4 x 610	4.54	4.55	34	155	52.1	623	483	701	548	165	157
1-1/4 x 12	31.8 x 305	6.89	6.06	34	155	52.1	941	636	1006	701	165	309
1-1/4 x 18	31.8 x 457	6.89	7.58	34	155	52.1	1245	788	1310	853	165	462
1-1/4 x 24	31.8 x 610	6.89	9.33	34	155	52.1	1565	956	1630	1021	165	631
1-1/2 x 12	38.1 x 305	9.71	9.48	46.7	205	71.5	1035	730	1117	812	216	306
1-1/2 x 18	38.1 x 457	9.71	11.3	46.7	205	71.5	1340	883	1422	965	216	459
1-1/2 x 24	38.1 x 610	9.71	13.1	46.7	205	71.5	1659	1050	1741	1131	216	625
1-3/4 x 18	44.5 x 457	12.7	13.9	52.3	227	71.4	1080	775	1174	869	240	313
1-3/4 x 24	44.5 x 610	12.7	16.3	52.3	227	71.4	1384	927	1479	1021	240	465
2 x 24	51.0 x 610	16.8	18.8	52.3	227	74.1	1705	1095	1799	1189	240	633
2-1/2 x 24	63.5 x 610	27.2	23.6	66	238	85	1406	949	1519	1061	253	467
2-3/4 x 24	70.0 x 610	34	27.1	66	238	85	1711	1101	1823	1312	253	619



WARNING


Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

US Type Turnbuckle Jaw & Jaw

DESCRIPTION & FEATURES

- **Functions:** Turnbuckles recommended for straight or in-line pull only.
- **Construction:** End fittings are quenched and tempered, bodies heat treated by normalizing.
- **Proof load:** Tested at 2.5 times of WLL.
- **Safety factor:** 5:1
- **Fatigue:** Tested at 1.5 times of WLL.
- **Standard:** Federal Specifications FF-T791b.

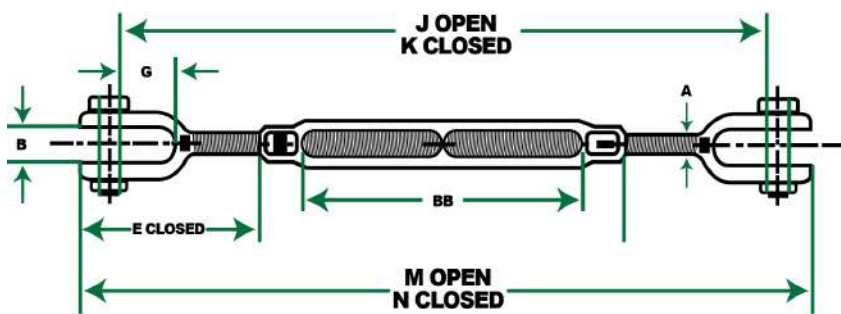

US TYPE TURNBUCKLE JAW & JAW

Thread DIA & Take Up		WLL (T)	WEIGHT (KG)	Dimension (MM)								
(IN)	(MM)			A	B	E	G	J	K	M	N	BB
1/4 x 4	6.35 x 102	0.23	0.17	6.35	11.4	42.0	16.1	284	183	309	208	103
5/16 x 4-1/2	7.94 x 114	0.36	0.25	7.94	12.7	51.2	22.0	332	218	359	244	116
3/8 x 6	9.53 x 152	0.54	0.39	9.53	13.5	53.5	21.5	413	260	445	292	155
1/2 x 6	12.7 x 152	1.00	0.83	12.7	16.3	81.8	27.1	474	321	512	359	153
1/2 x 12	12.7 x 305	1.00	1.04	12.7	16.3	81.8	27.1	622	405	671	443	238
5/8 x 6	15.9 x 152	1.59	1.23	12.7	16.3	81.8	27.1	786	481	824	519	314
5/8 x 12	15.9 x 305	1.59	1.46	15.9	20.1	99.1	33.5	501	349	554	402	153
3/4 x 6	19.1 x 152	2.36	1.79	15.7	20.1	98.8	33.5	662	434	715	487	239
3/4 x 12	19.1 x 305	2.36	2.08	15.9	20.1	98.8	33.5	815	510	868	563	315
3/4 x 18	19.1 x 457	2.36	2.18	19.1	24.6	120	38.5	536	383	601	449	156
7/8 x 12	22.2 x 305	3.27	2.65	19.1	24.6	119	38.5	698	470	764	535	244
7/8 x 18	22.2 x 457	3.27	3.05	19.1	24.6	119	38.5	851	546	916	612	320
1x6	25.4 x 152	4.54	3.83	19.1	24.6	120	38.5	1155	698	1221	764	471
1 x 12	25.4 x 305	4.54	4.25	22.2	29.5	140	44.8	880	575	956	651	309
1 x 18	25.4 x 457	4.54	5.34	22.2	29.5	140	44.8	1198	740	1272	815	473
1 x 24	25.4 x 610	4.54	4.74	25.4	34.0	155	52.1	605	453	690	538	157
1-1/4 x 12	31.8 x 305	6.89	6.25	25.4	34.0	155	52.1	910	605	995	690	309
1-1/4 x 18	31.8 x 457	6.89	7.77	25.4	34.0	155	52.1	1215	757	1300	843	462
1-1/4 x 24	31.8 x 610	6.89	9.51	25.4	34.0	155	52.1	1535	925	1620	1010	631
1-1/2 x 12	38.1 x 305	9.71	9.94	31.8	46.7	205	71.5	1000	695	1107	802	306
1-1/2 x 18	38.1 x 457	9.71	11.7	31.8	46.7	205	71.5	1305	848	1412	955	459
1-1/2 x 24	38.1 x 610	9.71	13.5	31.8	46.7	205	71.5	1624	1014	1731	1121	625
1-3/4 x 18	44.5 x 457	12.7	14.8	38.1	52.3	227	71.4	1035	731	1160	855	313
1-3/4 x 24	44.5 x 610	12.7	17.2	38.1	52.3	227	71.4	1340	883	1465	1008	465
2 x 24	51.0 x 610	16.8	19.7	38.1	52.3	227	74.1	1661	1051	1786	1176	633
2-1/2 x 24	63.5 x 610	27.2	24.3	44.5	66.0	238	85.0	1355	898	1503	1045	467
2-3/4 x 24	70.0 x 610	34.0	27.7	44.5	66.0	238	85.0	1660	1050	1807	1198	619




WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

S6 BOLT TYPE BOW SHACKLE

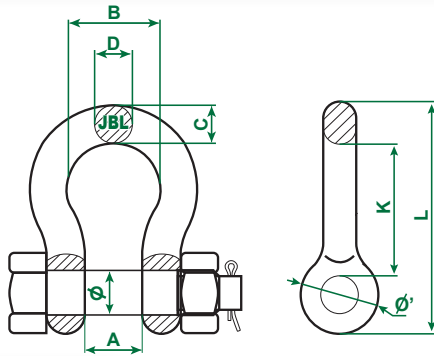

FEATURES

- Applicable for frequent, quick use in overhead lifting
- Grade 6 high tensile shackles with forged carbon steel body and pin
- Meets the performance requirements of Federal Specification RR-C-271H, Type IVA, Grade A, Class 3, except for those provisions required of the contractor.
- Proof load tested to 2 times the W.L.L
- Minimum breaking load is 6 times the W.L.L
- 100% magnaflux crack detection during manufacturing.
- Material: Body- Forged carbon steel, Pin- Alloy steel
- Shackle Surface Treatment: Hot dip galvanized,
- Nut Surface Treatment: Cold Galvanizing
- Bolt Surface Treatment: Hot Galvanizing / Cold Galvanizing / Plastic Spraying
- Construction: Quenched & tempered
- It can not be used beyond Working Load Limit (WLL)
- Temperature use range: - 20 °C and 200 °C
- Size, Grade, Batch No., Working Load Limit, Trademark: JBL / JB LIFTING and CE are permanently shown on each shackle.

SHKB - BOLT TYPE BOW SHACKLE

SHKB

Item Code	Size	WLL	B.L	A	B	C	D	L	Ø	K	Ø'	Weight
	Inch	Tonne	Tonne	mm	mm	mm	mm	mm	mm	mm	mm	kg
SHKB-0.3T	3/16"	0.33	1.98	9.7 ± 1	15.3 ± 1.5	4.8 ± 0.5	4.8 ± 0.5	37.5 ± 2	6 ± 0.2	21.6 ± 2	14.2 ± 1	0.025
SHKB-0.5T	1/4"	0.5	3	12 ± 1	19.8 ± 1.5	6.4 ± 0.5	6.4 ± 0.5	46.8 ± 2	7.5 ± 0.2	28 ± 2	15.5 ± 1	0.042
SHKB-0.75T	5/16"	0.75	4.5	13.5 ± 1	21.4 ± 1.5	8 ± 0.8	9.7 ± 0.8	53 ± 2	9.5 ± 0.2	29.8 ± 2	19 ± 1	0.008
SHKB-0.1T	3/8"	1	6	16.8 ± 1.2	26.2 ± 2	9.7 ± 0.8	9.7 ± 0.8	63 ± 2	11.2 ± 0.2	35.5 ± 2	23 ± 1.5	0.146
SHKB-1.5T	7/16"	1.5	9	19 ± 1.2	29.5 ± 2	11.2 ± 0.8	11.2 ± 0.8	74 ± 2	13.4 ± 0.3	42 ± 2	27 ± 1.5	0.225
SHKB-0.2T	1/2"	2	12	20.6 ± 1.2	33.3 ± 2	13.6 ± 0.8	13.5 ± 0.8	84.2 ± 2	15.2 ± 0.3	47 ± 2	30 ± 1.5	0.338
SHKB-3.25T	5/8"	3.25	19.5	27 ± 1.2	43 ± 2.5	17.6 ± 1	16 ± 1	106.5 ± 3	19 ± 0.3	59 ± 3	38 ± 2	0.71
SHKB-4.75T	3/4"	4.75	28.5	32 ± 1.5	50.8 ± 2.5	20.6 ± 1	19.5 ± 1	126.5 ± 3	21.2 ± 0.3	71 ± 3	46 ± 2	1.187
SHKB-6.5T	7/8"	6.5	39	36.6 ± 1.5	58 ± 2.5	24.6 ± 1	22.4 ± 1	148 ± 3	25 ± 0.3	83 ± 3	53 ± 2	1.829
SHKB-8.5T	1"	8.5	51	43 ± 1.5	68.4 ± 2.5	27 ± 1	25.4 ± 1	166.6 ± 3	28 ± 0.3	94 ± 3	60.5 ± 2	2.693
SHKB-9.5T	1-1/8"	9.5	57	46 ± 1.5	74 ± 3	31.8 ± 1.5	29.5 ± 1.5	190 ± 4	30 ± 0.5	108 ± 4	68.3 ± 3	3.915
SHKB-12T	1-1/4"	12	72	51.6 ± 2	82.5 ± 3	35 ± 1.5	32.7 ± 2	209.6 ± 4	36 ± 0.5	117 ± 4	76.2 ± 3	5.661
SHKB-13.5T	1-3/8"	13.5	81	57 ± 2	92 ± 3	36 ± 1.5	36 ± 2	232.7 ± 4	39 ± 0.5	134 ± 4	84 ± 3	6.84
SHKB-17T	1-1/2"	17	102	60.5 ± 2	99 ± 3	41 ± 1.5	39 ± 2	254 ± 4	39 ± 0.5	146 ± 4	92.2 ± 3	8.78
SHKB-25T	1-3/4"	25	150	73.2 ± 3	127 ± 4	57 ± 2	46.7 ± 2	313.5 ± 4	48 ± 0.5	177 ± 4	106.4 ± 3	17.818
SHKB-35T	2"	35	210	82.5 ± 3	146 ± 4	61 ± 2	52.8 ± 2.5	347.5 ± 5	56 ± 0.5	196 ± 5	127 ± 4	24.958
SHKB-55T	2-1/2"	55	330	105 ± 3	184 ± 4	79.5 ± 2	68.8 ± 2.5	453 ± 5	68 ± 0.5	266 ± 5	147.7 ± 4	50.423
SHKB-85T	3"	85	510	127 ± 3	200 ± 4	92 ± 2	92 ± 3	546 ± 6	82.5 ± 0.6	330 ± 6	165 ± 5	70.00
SHKB-120T	3-1/2"	120	720	133 ± 3	229 ± 4	105 ± 2	105 ± 3	626 ± 6	95.5 ± 0.6	372 ± 6	203 ± 5	120.00





WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright© 2024 | www.jblifting.com | All rights reserved

S6 SCREW PIN BOW SHACKLE

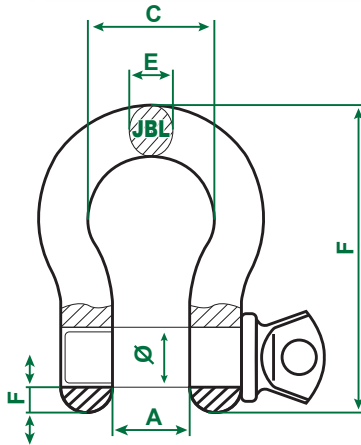

FEATURES

- Applicable for frequent, quick use in overhead lifting
- Grade 6 high tensile shackles with forged carbon steel body and pin
- Meets the performance requirements of Federal Specification RR-C-271H, Type IVA, Grade A, Class 3, except for those provisions required of the contractor.
- Proof load tested to 2 times the W.L.L
- Minimum breaking load is 6 times the W.L.L
- 100% magnaflux crack detection during manufacturing.
- Material: Body- Forged carbon steel, Pin- Alloy steel
- Shackle Surface Treatment: Hot dip galvanized,
- Nut Surface Treatment: Cold Galvanizing
- Bolt Surface Treatment: Hot Galvanizing / Cold Galvanizing / Plastic Spraying
- Construction: Quenched & tempered
- It can not be used beyond Working Load Limit (WLL)
- Temperature use range: - 20 °C and 200 °C
- Size, Grade, Batch No., Working Load Limit, Trademark: JBL / JB LIFTING and CE are permanently shown on each shackle.

SHK - HIGH STRENGTH SCREW PIN BOW SHACKLE

SHK

Item Code	Size	WLL	B.L	A	C ± 1.2	D ± 0.5	E ± 0.5	F ± 0.5	Ø ± 0.2	L ± 2	K ± 2	Ø' ± 1	Weight
	Inch	Tonne	Tonne	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
SHK-0.33T	3/16"	0.33	1.98	9.7 ± 1	15.3	4.8	4.8	3.4	7.2	37.5	21.6	14.2	0.022
SHK-0.5T	1/4"	0.5	3	12 ± 1	19.8	6.4	6.4	3.4	8.7	46.8	28	15.5	0.04
SHK-0.75T	5/16"	0.75	4.5	13.5 ± 1	21.4	8	8	4	11	53	29.8	19	0.08
SHK-01T	3/8"	1	6	16.8 ± 1.2	26.2	9.7	9.7	5	13.5	63.2	35.5	23	0.13
SHK-1.5T	7/16"	1.5	9	19 ± 1.2	29.5	11.2	11.2	6	15	78	42	27	0.21
SHK-02T	1/2"	2	12	20.6 ± 1.2	33.3	13.5	13.5	6.6	17.5	83.3	47	30	0.32
SHK-3.25T	5/8"	3.25	19.5	27 ± 1.2	42.9	17.5	16	8.3	21.5	106.5	59	38	0.67
SHK-4.75T	3/4"	4.75	28.5	32 ± 1.5	50.8	20.6	19	10.75	23.5	126.5	71	46	1.04
SHK-6.5T	7/8"	6.5	39	36.6 ± 1.5	58	24.6	22.4	13.3	27.5	148	83	53	1.64
SHK-8.5T	1"	8.5	51	43 ± 1.5	68.4	27	25.4	15.75	30.5	167	94	60.5	2.51
SHK-9.5T	1-1/8"	9.5	57	46 ± 1.5	74	31.8	29.5	18.2	32.5	190	108	68.3	3.77
SHK-12T	1-1/4"	12	72	51.6 ± 2	82.6	35	32.7	19	38.7	209.6	117	76.2	4.98
SHK-13.5T	1-3/8"	13.5	81	57 ± 2	92.2	36	36	21	41.7	232.7	134	84	6.01
SHK-17T	1-1/2"	17	102	60.5 ± 2	98.6	41	39	25.3	42	254	146	92.2	8.3
SHK-25T	1-3/4"	25	150	73.2 ± 3	127	57	46.7	27.8	51	313.5	177	106.4	17
SHK-35T	2"	35	210	82.5 ± 3	146	61	52.8	31.5	59.5	347.5	196	127	21.7
SHK-55T	2-1/2"	55	330	105 ± 3	184	79.5	68.8	37.1	70.5	453	266	147.7	45.6





WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

S6 BOLT TYPE DEE SHACKLE

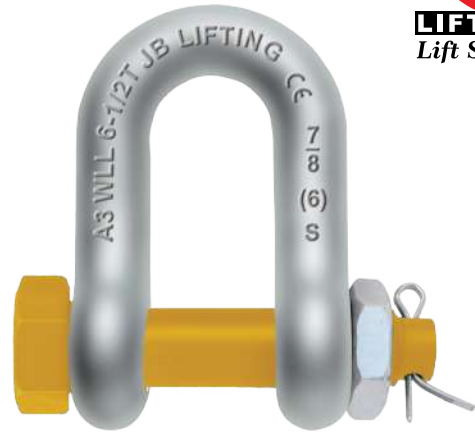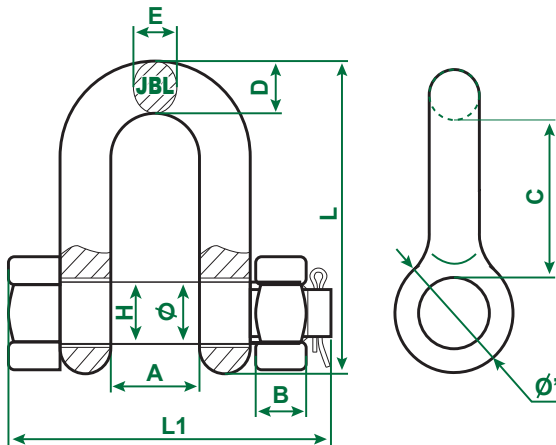

FEATURES

- Applicable for frequent, quick use in overhead lifting
- Grade 6 high tensile shackles with forged carbon steel body and pin
- Meets the performance requirements of Federal Specification RR-C-271H, Type IVA, Grade A, Class 3, except for those provisions required of the contractor.
- Proof load tested to 2 times the W.L.L
- Minimum breaking load is 6 times the W.L.L
- 100% magnaflux crack detection during manufacturing.
- Material: Body- Forged carbon steel, Pin- Alloy steel
- Shackle Surface Treatment: Hot dip galvanized,
- Nut Surface Treatment: Cold Galvanizing
- Bolt Surface Treatment: Hot Galvanizing / Cold Galvanizing / Plastic Spraying
- Construction: Quenched & tempered
- It can not be used beyond Working Load Limit (WLL)
- Temperature use range: - 20 °C and 200 °C
- Size, Grade, Batch No., Working Load Limit, Trademark: JBL / JB LIFTING and € are permanently shown on each shackle.

SHKDB - HIGH STRENGTH BOLT TYPE DEE SHACKLE

SHKDB

Item Code	Size	WLL	B.L	A	D ± 0.5	E ± 0.5	H ± 0.2	L ± 2	L1 ± 0.5	Ø	Ø' ± 1	B	C ± 2	Weight
	Inch	Tonne	Tonne	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg
SHKDB-0.33T	3/16"	0.33	1.98	9.7 ± 1	4.8	4.8	7	34.15	32	6	14.2	3.2	18.7	0.023
SHKDB-0.5T	1/4"	0.5	3	12 ± 1	6.4	6.4	8.7	40.4	40	7.5	15.5	4	22	0.04
SHKDB-0.75T	5/16"	0.75	4.5	13.5 ± 1	8	8	11.5	48.5	48.4	9.5	19	5	25.6	0.09
SHKDB-01T	3/8"	1	6	16.8 ± 1.2	9.7	9.7	13	58.7	57.8	11.2	23	6	30	0.15
SHKDB-1.5T	7/16"	1.5	9	19 ± 1.2	11.2	11.2	12.7	67.8	65.9	13.4	27	7	35.4	0.21
SHKDB-02T	1/2"	2	12	20.6 ± 1.2	12.7	12.7	17	77	73.7	15.2	30	8	40.2	0.32
SHKDB-3.25T	5/8"	3.25	19.5	27 ± 1.2	17.5	16	21	95.5	94	19	38	10	50	0.61
SHKDB-4.75T	3/4"	4.75	28.5	32 ± 1.5	20.6	19.5	23	115	108.7	21.2	46	10	60.5	1.1
SHKDB-6.5T	7/8"	6.5	39	36.6 ± 1.5	24.6	22.4	25.9	135.4	127.8	25	53	12	71	1.67
SHKDB-8.5T	1"	8.5	51	43 ± 1.5	27	26	29.2	151	145.8	28	60.5	13.5	79	2.38
SHKDB-9.5T	1-1/8"	9.5	57	46 ± 1.5	31.8	28.7	32	172.2	160.7	30	68.3	15	90	3.62
SHKDB-12T	1-1/4"	12	72	51.6 ± 2	35	32.7	38.5	190.5	181	36	76.2	18	97	5.1
SHKDB-13.5T	1-3/8"	13.5	81	57 ± 2	35	36	41	210.3	188.3	39	84	19	107	6.4
SHKDB-17T	1-1/2"	17	102	60.5 ± 2	41.2	38.1	41.5	230	211	39	92.2	20	121	8.1
SHKDB-25T	1-3/4"	25	150	73.2 ± 3	53.8	44.5	50.5	278.7	281.6	48	106.4	39	146	15.4
SHKDB-35T	2"	35	210	82.5 ± 3	61	53	58.4	323.6	311	56	127	46	169	22.9
SHKDB-55T	2-1/2"	55	330	105	65	65	70	376	330	70	145	32	203	35.33
SHKDB-85T	3"	85	510	127	75	75	83	427	380	83	162	39	229	52.97




WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

S6 SCREW PIN DEE SHACKLE

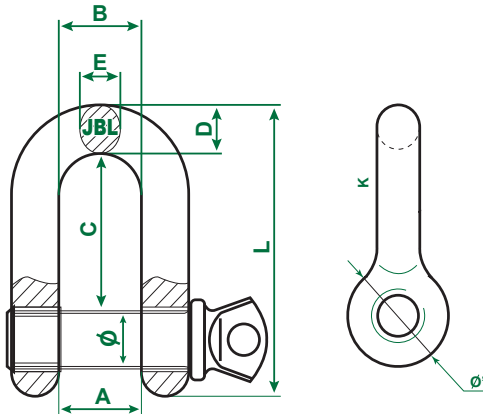

FEATURES

- Applicable for frequent, quick use in overhead lifting
- Grade 6 high tensile shackles with forged carbon steel body and pin
- Meets the performance requirements of Federal Specification RR-C-271H, Type IVA, Grade A, Class 3, except for those provisions required of the contractor.
- Proof load tested to 2 times the W.L.L
- Minimum breaking load is 6 times the W.L.L
- 100% magnaflux crack detection during manufacturing.
- Material: Body- Forged carbon steel, Pin- Alloy steel
- Shackle Surface Treatment: Hot dip galvanized,
- Nut Surface Treatment: Cold Galvanizing
- Bolt Surface Treatment: Hot Galvanizing / Cold Galvanizing / Plastic Spraying
- Construction: Quenched & tempered
- It can not be used beyond Working Load Limit (WLL)
- Temperature use range: - 20 °C and 200 °C
- Size, Grade, Batch No., Working Load Limit, Trademark: JBL / JB LIFTING and CE are permanently shown on each shackle.

SHKD - HIGH STRENGTH SCREW PIN DEE SHACKLE

SHKD


Item Code	Size	WLL	B.L	A	C ± 2	E ± 0.5	D ± 0.5	L ± 2	Ø ± 0.2	Ø' ± 1	Weight
	Inch	Tonne	Tonne	mm	mm	mm	mm	mm	mm	mm	kg
SHKD-0.33T	3/16"	0.33	1.98	9.7 ± 1	18.7	4.8	4.8	34.2	6	14.2	0.02
SHKD-0.5T	1/4"	0.5	3	12 ± 1	22	6.35	6.35	40.4	7.5	15.5	0.04
SHKD-0.75T	5/16"	0.75	4.5	13.5 ± 1	25.6	8	8	48.5	9.5	19	0.07
SHKD-01T	3/8"	1	6	16.8 ± 1.2	30	9.7	9.7	58.5	11.5	23	0.12
SHKD-1.5T	7/16"	1.5	9	19 ± 1.2	35.4	11.2	11.2	67.6	13.4	27	0.19
SHKD-02T	1/2"	2	12	20.6 ± 1.2	40.2	12.7	12.7	77	15.5	30	0.27
SHKD-3.25T	5/8"	3.25	19.5	27 ± 1.2	50	16	17.5	95.5	19.5	38	0.58
SHKD-4.75T	3/4"	4.75	28.5	32 ± 1.5	60.5	19	20.6	116.6	21.5	46	0.98
SHKD-6.5T	7/8"	6.5	39	36.6 ± 1.5	71	22.4	24.6	135.5	25	53	1.53
SHKD-8.5T	1"	8.5	51	43 ± 1.5	79	26	27	150.8	28	60.5	2.14
SHKD-9.5T	1-1/8"	9.5	57	46 ± 1.5	90	28.7	31.8	172.2	29.5	68.3	3.17
SHKD-12T	1-1/4"	12	72	51.6 ± 2	97	32.7	35	190.5	35.7	76.2	4.45
SHKD-13.5T	1-3/8"	13.5	81	57 ± 2	107	36	35	210.3	39	84	5.57
SHKD-17T	1-1/2"	17	102	60.5 ± 2	121	38	41	230.1	39	92.2	7.22
SHKD-25T	1-3/4"	25	150	73.2 ± 3	146	44.5	53.8	278.6	48	106.4	13
SHKD-35T	2"	35	210	82.5 ± 3	169	53	61	324	56	127	20.2



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

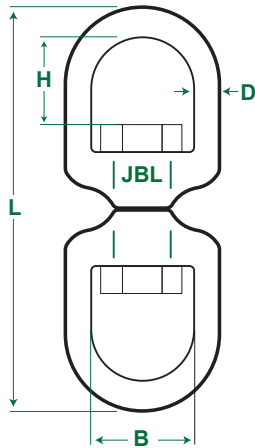

KEY FEATURES

- **Corrosion-resistant:** Marine and outdoor use.
- **360° Rotation:** Unrestricted movement.
- **Durable:** Stainless steel construction.
- **Easy Installation:** Tool-free setup.
- **Versatile:** Fits various rigging needs.
- **Secure Connection:** Strong jaw attachment.
- **Smooth Operation:** Easy rotation.
- **Safe:** Secure rigging for safety.
- **Various Sizes:** Different load options.
- **Cost-effective:** Reliable and long-lasting.

SS SWIVEL EYE & EYE

SSSWEE


ItemCode(s)	Size	Dimensions				Weight
		D	L	H	B	
	mm	mm	mm	mm	mm	kg
SSSWEE-05	5	5	60	13	13	0.04
SSSWEE-06	6	6	65	15	15	0.05
SSSWEE-08	8	8	90	22	20	0.12
SSSWEE-10	10	10	115	27	24	0.25
SSSWEE-13	13	13	154	35	32	0.57
SSSWEE-16	16	16	188	45	39	0.95
SSSWEE-19	19	19	231	50	41	1.65
SSSWEE-22	22	22	254	54	47	2.25
SSSWEE-25	25	25	295	68	63	4.45



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
 Copyright©2024 | www.jblifting.com | All rights reserved

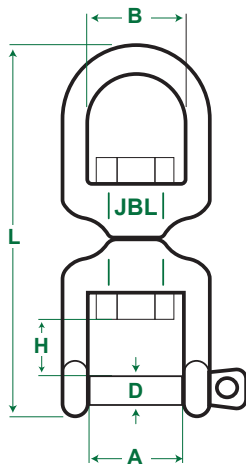

KEY FEATURES

- **Corrosion-resistant:** Ideal for marine and outdoor use.
- **360° Rotation:** unrestricted movement.
- **Durable:** Made of stainless steel for longevity.
- **Easy Installation:** Simple setup, no specialized tools needed.
- **Versatile:** Adaptable for various rigging needs.
- **Secure Connection:** Eye and jaw ends ensure strong attachment.
- **Smooth Operation:** Allows easy rotation.
- **Safe:** Ensures secure rigging for safety.
- **Various Sizes:** Available for different loads.

SS SWIVEL EYE & JAW


SSSWEJ

ItemCode(s)	Size	Dimensions					Weight
		D	L	H	B	A	
	mm	mm	mm	mm	mm	mm	kg
SSSWEJ-05	5	5	60	11.5	13	10	0.04
SSSWEJ-06	6	6	66	12	15	12	0.06
SSSWEJ-08	8	8	92	16	20	16	0.15
SSSWEJ-10	10	10	118	22	24	20	0.29
SSSWEJ-13	13	13	152	28	32	26	0.63
SSSWEJ-16	16	16	188	37	39	32	1.12
SSSWEJ-19	19	19	229	44	41	38	2

**WARNING**

Never exceed Working
Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

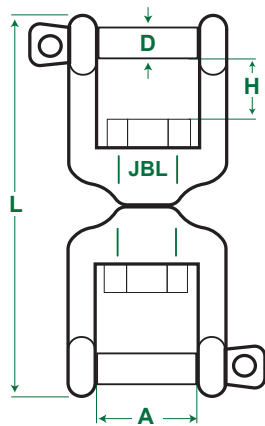

KEY FEATURES

- **Corrosion-resistant:** Ideal for marine and outdoor use.
- **360° Rotation:** Allows unrestricted movement.
- **Durable:** Made of stainless steel for longevity.
- **Easy Installation:** Simple setup, no specialized tools needed.
- **Versatile:** Fits various rigging needs.
- **Secure Connection:** Jaw ends ensure strong attachment.
- **Smooth Operation:** Provides easy rotation.
- **Safe:** Ensures secure rigging for safety.
- **Various Sizes:** Available for different loads.
- **Cost-effective:** Durable and reliable.

SS SWIVEL JAW & JAW


SSSWJJ

ItemCode(s)	Size	Dimensions				Weight
		D	L	H	A	
	mm	mm	mm	mm	mm	kg
SSSWJJ-05	5	5	60	11.5	10	0.04
SSSWJJ-06	6	6	66	12	12	0.07
SSSWJJ-08	8	8	94	16	16	0.17
SSSWJJ-10	10	10	118	22	20	0.33
SSSWJJ-13	13	13	152	28	26	0.69
SSSWJJ-16	16	16	188	37	32	1.25
SSSWJJ-19	19	19	229	44	38	2.15

**WARNING**

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
 Copyright©2024 | www.jblifting.com | All rights reserved

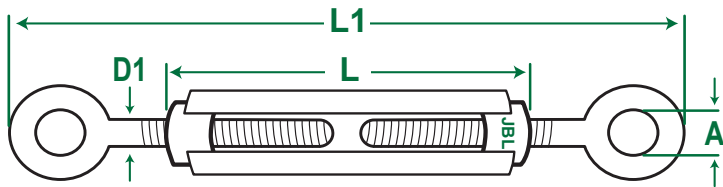

KEY FEATURES

- **Standard:** SS DIN 1480
- **Corrosion-resistant:** Ideal for outdoor and marine use.
- **Adjustable:** Easily modify tensioned ropes.
- **Durable:** Long-lasting stainless steel build.
- **Easy Installation:** Simple setup, no special tools needed.
- **Versatile:** Fits various tensioning needs.
- **Secure Connection:** Eye ends ensure strong attachment.
- **Smooth Operation:** Threads allow easy adjustments.
- **Safe:** Provides secure tensioning for safety.
- **Various Sizes:** Available for different loads.
- **Cost-effective:** Durable and reliable.

SS TURNBUCKLE EYE & EYE


SSTBEE

ItemCode(s)	Dimensions				Weight
	D1	L	L1	A	
	mm	mm	mm	mm	kg
SSTBEE-05	M5	70	120	8	0.05
SSTBEE-06	M6	90	150	10	0.08
SSTBEE-08	M8	120	200	14	0.17
SSTBEE-10	M10	150	240	16	0.28
SSTBEE-12	M12	200	310	18	0.52
SSTBEE-16	M16	250	390	26	1.2
SSTBEE-20	M20	300	440	30	2.15

**WARNING**

Never exceed Working
Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

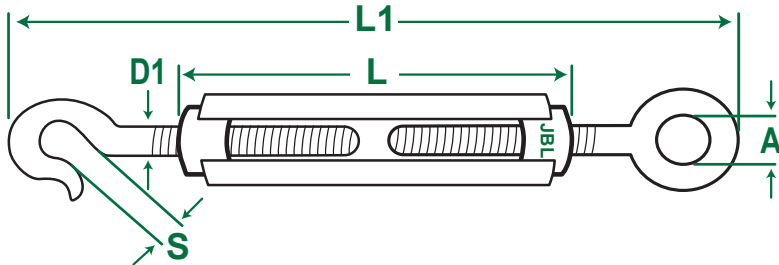

KEY FEATURES

- **Standard:** SS DIN 1480
- **Material:** AISI 304/316
- **Corrosion-resistant:** Ideal for outdoor and marine use.
- **Adjustable:** Easily modify tensioned ropes.
- **Durable:** Long-lasting stainless steel build.
- **Easy Installation:** Simple setup, no special tools needed.
- **Versatile:** Fits various tensioning needs.
- **Secure Connection:** Eye and hook ends ensure strong attachment.
- **Smooth Operation:** Threads allow easy adjustments.
- **Safe:** Provides secure tensioning for safety.
- **Various Sizes:** Available for different loads.
- **Cost-effective:** Durable and reliable.


SS TURNBUCKLE EYE & HOOK

SSTBEH

ItemCode(s)	Dimensions					Weight
	D1	L	L1	A	S	
	mm	mm	mm	mm	mm	
SSTBEH-04	M4	58	90	6	6	
SSTBEH-05	M5	70	120	8	8	0.05
SSTBEH-06	M6	90	150	10	9	0.08
SSTBEH-08	M8	120	200	14	11	0.17
SSTBEH-10	M10	150	240	16	12	0.28
SSTBEH-12	M12	200	310	18	14	0.52
SSTBEH-16	M16	250	390	26	16	1.2
SSTBEH-20	M20	300	440	30	18	2.15



The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

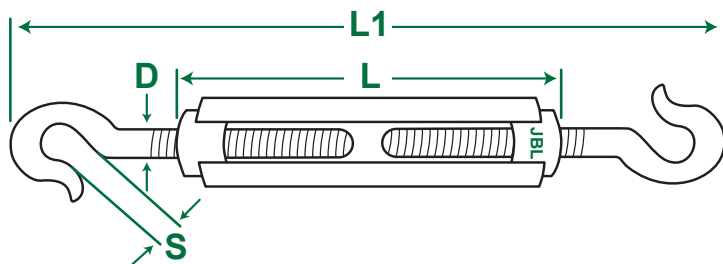

KEY FEATURES

- **Standard:** DIN 1480
- **Corrosion-resistant:** Ideal for outdoor and marine use.
- **Adjustable:** Easily modify tensioned ropes.
- **Durable:** Long-lasting stainless steel build.
- **Easy Installation:** Simple setup, no special tools needed.
- **Secure Connection:** Hooks ensure strong attachment.
- **Smooth Operation:** Threads allow easy adjustments.
- **Safe:** Provides secure tensioning for safety.
- **Various Sizes:** Available for different loads.
- **Cost-effective:** Durable and reliable.

SS TURNBUCKLE HOOK & HOOK

SSTBHH


ItemCode(s)	Dimensions				Weight
	D	L	L1	S	
	mm	mm	mm	mm	kg
SSTBHH-05	C	70	120	8	0.05
SSTBHH-06	M6	90	150	9	0.08
SSTBHH-08	M8	120	200	11	0.17
SSTBHH-10	M10	150	240	12	0.28
SSTBHH-12	M12	200	310	14	0.52
SSTBHH-16	M16	250	390	16	1.2
SSTBHH-20	M20	300	440	18	2.15



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

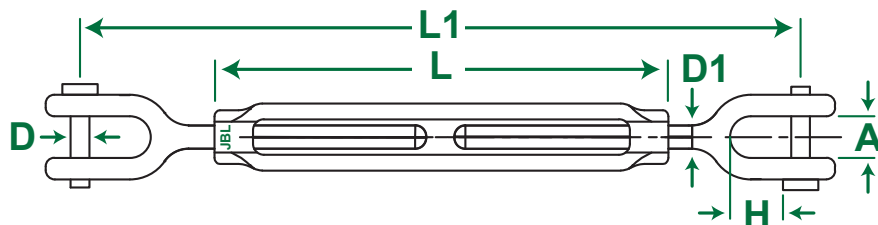

KEY FEATURES

- **Secure Grip:** Strong hold on wire ropes.
- **Corrosion-resistant:** Suitable for outdoor use.
- **Easy Installation:** No specialized tools required.
- **Durable:** Made of stainless steel for longevity.
- **Versatile:** Fits various wire rope applications.
- **Adjustable:** Allows tension adjustments.
- **Safe:** Provides reliable attachment for safety.
- **Various Sizes:** Available for different rope diameters.
- **Compliant:** Meets industry standards.
- **Cost-effective:** Durable and reliable.

SS TURNBUCKLE JAW & JAW

SSTBJJ

ItemCode(s)	Dimensions						Weight
	D1	L	L1	A	D	H	
	mm	mm	mm	mm	mm	mm	kg
SSTBJJ-05	M5	70	120	6.5	5	10	0.05
SSTBJJ-06	M6	90	140	7.5	6	10	0.08
SSTBJJ-08	M8	120	180	11	8	11	0.17
SSTBJJ-10	M10	150	220	12	9	14	0.28
SSTBJJ-12	M12	200	300	14	12	20	0.52
SSTBJJ-14	M14	220	325	15	12	22	0.8
SSTBJJ-16	M16	250	375	17	16	26	1.2
SSTBJJ-20	M20	300	450	20	19	30	2.15




WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

SS WIRE ROPE CLIP

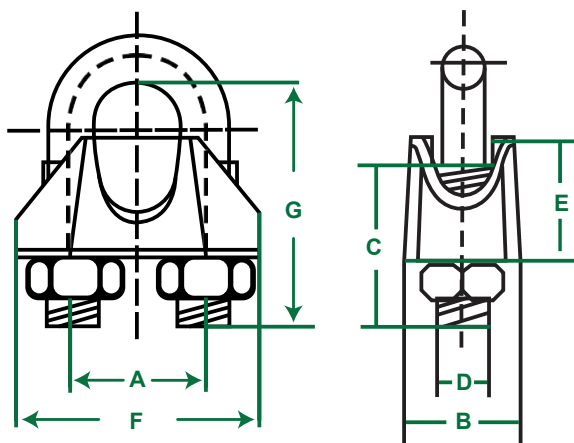

KEY FEATURES

- **Secure Grip:** Strong hold on wire ropes.
- **Corrosion-resistant:** Suitable for outdoor use.
- **Easy Installation:** No specialized tools required.
- **Durable:** Made of stainless steel for longevity.
- **Versatile:** Fits various wire rope applications.
- **Adjustable:** Allows tension adjustments.
- **Safe:** Provides reliable attachment for safety.
- **Various Sizes:** Available for different rope diameters.
- **Compliant:** Meets industry standards.
- **Cost-effective:** Durable and reliable.

SS WIRE ROPE CLIP

SSCLIP


ITEM NO.	SIZE		DIMENSION(MM)							WEIGHT (KG)
			A	B	C	D	E	F	G	
	MM	IN	MM	MM	MM	MM	MM	MM	MM	
SSCLIP-03	3	1/8	9	10	12	4	10	21	16	0.014
SSCLIP-05	5	3/16	11	11	13	5	10	23	19	0.015
SSCLIP-06.5	6.5	1/4	13	12	15	5	11	26	23	0.021
SSCLIP-08	8	5/16	16	14	19	6	15	30	28	0.041
SSCLIP-10	10	3/8	19	18	22	8	17	34	34	0.068
SSCLIP-11	11	7/16	20	19	22	8	18	36	36	0.072
SSCLIP-13	13	1/2	24	23	30	10	21	42	45	0.13
SSCLIP-14	14	9/16	25	23	30	10	22	44	47	0.135
SSCLIP-16	16	5/8	29	26	33	12	26	50	51	0.21
SSCLIP-19	19	3/4	32	29	38	12	30	54	63	0.28
SSCLIP-22	22	7/8	37	33	44	14	34	61	71	0.4
SSCLIP-26	26	1	41	35	45	14	37	65	81	0.44
SSCLIP-30	30	11/8	48	37	50	16	43	74	94	0.66
SSCLIP-34	34	11/4	52	42	55	16	50	80	104	0.85
SSCLIP-40	40	11/2	58	45	60	16	55	88	124	1.04



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.SafeAndSecureKSA.com | All rights reserved

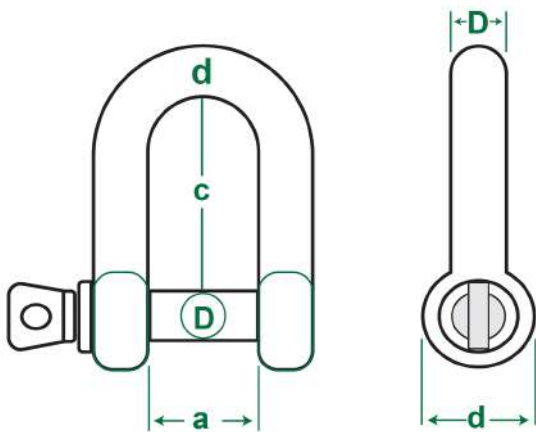

KEY FEATURES

- **Corrosion-resistant:** Suitable for marine and outdoor use.
- **High strength:** Reliable for lifting and rigging.
- **Versatile:** Fits various tasks and connections.
- **Easy to use:** Quick assembly with screw pin.
- **Durable:** Long-lasting stainless steel construction.
- **Safe:** Securely holds loads for safety.
- **Various sizes:** Available for different load capacities.
- **Compliant:** Meets safety standards.
- **Smooth finish:** Prevents rope or cable damage.
- **Cost-effective:** Offers durability for value.

STAINLESS STEEL DEE TYPE SHACKLE SCREW PIN

SSSD

Item Code(s)	WLL (KG)	Dimension					Weight (KG)
		D mm	d mm	a mm	c mm	b mm	
SSSD05	80	5	5	10	19	11	0.019
SSSD06	100	6	6	13	25	14	0.034
SSSD08	200	8	8	16	32	18	0.07
SSSD10	320	10	10	19	38	20	0.13
SSSD12	520	12	12	25	51	26	0.24
SSSD16	800	16	16	32	64	33	0.5
SSSD20	1100	20	20	38	76	40	0.8
SSSD22	1500	22	22	44	89	50	1.3
SSSD25	2100	25	25	51	100	57	2
SSSD28	3000	28	28	57	115	68	3
SSSD32	3500	32	32	64	127	73	4.3
SSSD38	5000	38	38	76	152	85	6.75
SSSD45	7000	45	45	90	180	96	12.5
SSSD50	8000	50	50	102	200	108	17.5




WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.SafeAndSecureKSA.com | All rights reserved

STAINLESS STEEL EYE BOLT

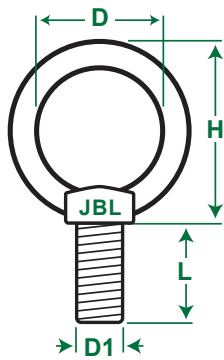

KEY FEATURES

- **Corrosion Resistance:** Suitable for marine and outdoor use.
- **High Strength:** Reliable for lifting and rigging tasks.
- **Versatility:** Compatible with various attachments and applications.
- **Easy Installation:** Simple to install and remove.
- **Durability:** Long-lasting material for extended service life.
- **Safety:** Secure attachment ensures safe lifting.
- **Various Sizes:** Available options for different load capacities.
- **Compliance:** Meets industry standards and regulations.
- **Smooth Finish:** Prevents damage to ropes or cables.
- **Cost-effective:** Offers value through durability.

STAINLESS STEEL EYE BOLT

SSEB

ItemCode(s)	Size	Dimensions				Weight
		D1	L	D	H	
	mm	mm	mm	mm	mm	kg
SSEB-06	6	M6	11	16	31	0.025
SSEB-08	8	M8	13	20	36	0.05
SSEB-10	10	M10	17	25	45	0.094
SSEB-12	12	M12	20.5	30	53	0.166
SSEB-16	16	M16	27	35	62	0.26
SSEB-20	20	M20	30	40	71	0.42
SSEB-24	24	M24	36	50	90	0.84
SSEB-30	30	M30	45	60	109	1.57
SSEB-36	36	M36	54	70	128	2.38




WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

STAINLESS STEEL EYE NUT

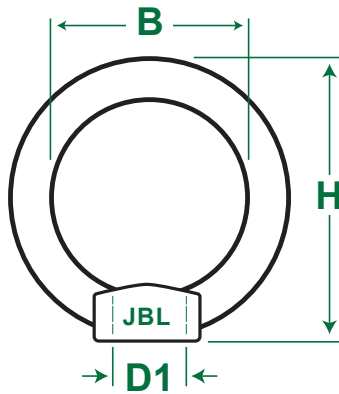

KEY FEATURES

- **Corrosion-resistant:** Suitable for outdoor and marine use.
- **High strength:** Reliable for lifting applications.
- **Versatile:** Compatible with various lifting hardware.
- **Easy installation:** Simple to install and remove.
- **Durable:** Long-lasting material for extended service life.
- **Safety:** Secure attachment for safe lifting.
- **Various sizes:** Available options for different load capacities.
- **Compliant:** Meets industry standards.
- **Smooth finish:** Prevents damage to slings or ropes.
- **Cost-effective:** Offers value with longevity.

STAINLESS STEEL EYE NUT

SSEN

ItemCode(s)	Size	Dimensions			Weight
		D1	B	H	
	mm	mm	mm	mm	kg
SSEN-06	M6	6	16	31	0.023
SSEN-08	M8	8	20	36	0.046
SSEN-10	M10	10	25	45	0.86
SSEN-12	M12	12	30	53	0.144
SSEN-16	M16	16	35	62	0.23
SSEN-20	M20	20	40	71	0.334
SSEN-24	M24	24	50	90	0.675
SSEN-30	M30	30	60	109	1.3
SSEN-36	M36	36	70	128	1.96




WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

STAINLESS STEEL THIMBLE



KEY FEATURES

- **Corrosion-resistant:** Ideal for marine and harsh environments.
- **Durable:** Withstands heavy loads and prolonged use.
- **Longevity:** Offers a long service life.
- **Versatile:** Suitable for various applications like rigging and towing.
- **Smooth edges:** Prevents rope or cable damage.
- **Easy maintenance:** Requires minimal upkeep.
- **Various sizes:** Available to fit different rope diameters.
- **Compatibility:** Works with a wide range of ropes and cables.
- **Cost-effective:** Long-term investment due to durability.
- **Safety:** Reinforces and protects rope loops, enhancing safety.

STAINLESS STEEL THIMBLE

SSTMB

ItemCode(s)	Size	Dimensions				Weight
		A	B	L	S	
	mm	mm	mm	mm	mm	kg
SSTMB-02	2	2	7	10	1	0.002
SSTMB-03	3	3	10	17	1	0.004
SSTMB-04	4	4	11	18	1	0.005
SSTMB-05	5	5.6	13	20	1.2	0.007
SSTMB-06	6	6.5	15	25	1.2	0.01
SSTMB-08	8	9	18	33	1.5	0.018
SSTMB-10	10	11	23	41	2	0.038
SSTMB-12	12	14	27	48	2	0.05
SSTMB-14	14	15	34	53	2.5	0.1
SSTMB-16	16	17	36	57	3	0.125
SSTMB-18	18	19	40	67	3	0.16
SSTMB-20	20	22	45	75	4	0.265
SSTMB-22	22	24	52	84	4	0.325
SSTMB-24	24	26	56	96	5	0.46
SSTMB-28	28	30	65	115	6	0.8
SSTMB-32	32	34	82	144	6	1.05
SSTMB-36	36	40	94	170	6	1.42



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

GALVANIZED HEAVY DUTY THIMBLE



DESCRIPTION & FEATURES

- Standard EN 13411-1
- Grade 414
- Made from durable G80 alloy steel.
- Galvanization resists corrosion and rust in humid and harsh conditions.
- Thimbles reduce wear and abrasion on wire rope slings during loading.
- Galvanized accessories have a longer lifespan compared to non-galvanized ones.
- Improved safety by minimizing friction and potential damage to rope fibers.
- Enhanced reliability makes them suitable for lifting, rigging, and marine applications.



GALVANIZED HEAVY DUTY THIMBLE

TMBH

ItemCode(s)	Dimensions				Weight
	L	A	B	C	
	inch	inch	inch	inch	
TMB06-H	2 3/16	1 1/2	1 5/8	7/8	3.04
TMB08-H	2 1/2	1 13/16	1 7/8	1 1/16	6.3
TMB10-H	2 7/8	2 1/8	2 1/8	1 1/8	11.3
TMB12-H	3 5/8	3 5/8	2 3/4	1 1/2	23
TMB14-H	3 5/8	2 11/16	2 3/4	1 1/2	23
TMB16-H	4 1/4	3 1/8	3 1/4	1 3/4	33.8
TMB19-H	5	3 13/16	3 3/4	2	66.2
TMB22-H	5 1/2	4 1/4	4 1/4	2 1/4	83.3
TMB26-H	6 1/8	4 15/16	4 1/2	2 1/2	135
TMB30-H	7	5 7/8	5 1/8	2 7/8	184.5
TMB36-H	9	7 1/8	6 1/2	3 1/2	540
TMB42-H	11 1/4	8 1/8	8	4	731.3
TMB44-H	12 13/16	8 1/2	9	4 1/2	810
TMB48-H	15 1/8	10 3/8	12	6	1170
TMB56-H	17 1/8	11 7/8	14	7	1935



WARNING


Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

GALVANIZED THIMBLE

DESCRIPTION & FEATURES

- Standard G411
- Strong galvanized steel construction.
- Protects and reinforces wire rope eyes.
- Ideal for rigging and wire rope applications.
- Ensures longevity and safety at connection points.
- Resistant to wear and tear.
- Versatile for various industries.
- Made from durable G80 alloy steel.

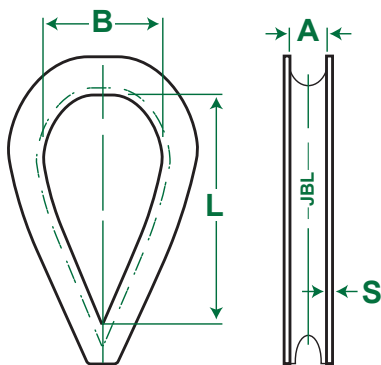

GALVANIZED THIMBLE

TMBG

ItemCode(s)	Rope Diameter mm	Dimensions				Weight kgs/100
		L mm	A mm	B mm	S mm	
TMB02.5-G	2.5	22	16	19	12	0.5
TMB3.5-G	3.5	26	17	21	13	0.8
TMB04-G	4	25	19	16	11	0.4
TMB05-G	5	31	22	22	16	0.8
TMB06-G	6	37	29	26	19	1.4
TMB08-G	8	51	38	34	24	2.8
TMB10-G	10	64	44	42	32	4.8
TMB12-G	12	76	57	51	38	8
TMB14-G	14	82	60	57	40	10
TMB16-G	16	89	64	60	42	15
TMB18-G	18	102	69	67	45	22
TMB20-G	20	115	79	76	51	25
TMB22-G	22	127	89	83	54	32
TMB24-G	24	140	102	88	64	46
TMB26-G	26	152	105	102	68	66
TMB28-G	28	165	115	110	73	77
TMB30-G	30	178	121	115	79	80
TMB32-G	32	203	133	140	93	130
TMB36-G	36	229	184	177	115	540
TMB40-G	40	254	206	198	120	730



WARNING


Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

GALVANIZED WIRE ROPE CLIP

DESCRIPTION & FEATURES

- **Material:** Typically made from galvanized steel.
- **Safety:** Enhances safety and load-bearing capacity.
- **Purpose:** Secures wire rope ends to create loops or eyes.
- **Corrosion Resistance:** Galvanized coating for outdoor and marine use.
- **Applications:** Used in rigging, lifting, and suspension systems.
- **Reliability:** Ensures a durable and reliable connection.
- **Versatility:** Suitable for various industries and applications.
- CE, SWL & JB Lifting (JBL) Mark shown on the product.

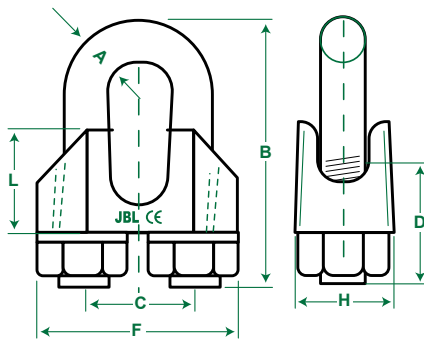

GALVANIZED WIRE ROPE CLIP

CLIP

Item-Code	Rope Diameter	Dimensions							Weight
		A	B	C	D	F	H	L	
	mm	mm	mm	mm	mm	mm	mm	mm	Kg/100
CLIP-03	3	4	20	9	12	21	10	10	1.4
CLIP-05	5	5	24	11	13	23	11	10	1.5
CLIP-06	6	5	28	13	15	26	12	11	2.1
CLIP-08	8	6	34	16	19	30	14	15	4.1
CLIP-10	10	8	42	19	22	34	18	17	6.8
CLIP-13	13	10	55	24	30	42	23	21	11
CLIP-16	16	12	63	29	33	50	26	26	21
CLIP-19	19	12	75	32	38	54	29	30	28
CLIP-22	22	14	85	37	44	61	33	34	40
CLIP-26	26	14	95	41	45	65	35	37	44
CLIP-30	30	16	110	48	50	74	37	43	60
CLIP-34	34	16	120	52	55	80	42	50	85
CLIP-40	40	16	140	58	60	88	45	55	104



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

HEAVY DUTY WIRE ROPE CLIP



DESCRIPTION & FEATURES

- **Purpose:** Used on wire rope eye connections.
- **Temporary Joints:** Suitable for creating temporary joints as needed.
- **Versatility:** Can be used in various applications and industries.
- **Safety Considerations:** Ensure proper installation for optimal performance and safety.
- **Durability:** Designed to withstand load and wear during temporary use.
- **Compatibility:** Compatible with different types and sizes of wire ropes.
- **Maintenance:** Requires periodic inspection to ensure continued reliability and safety.
- Made from durable G80 alloy steel.
- CE, Serial number, SWL & JB Lifting (JBL) Mark shown on the product.

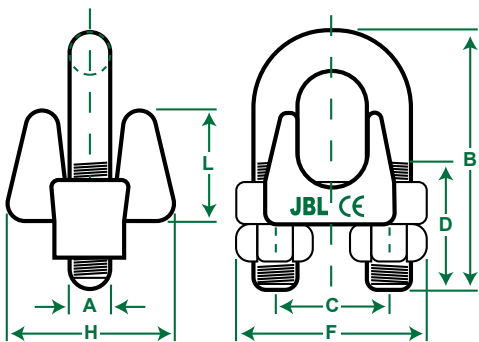

HEAVY DUTY WIRE ROPE CLIP

CLIP-H

ItemCode(s)	Size		No. of Clips	Dimensions							Weight
	mm	inch		A	B	C	D	F	H	L	kgs/100
CLIP06-H	12	1/4	2	8	34	19	13	37	30	17	8
CLIP08-H	11	5/16	3	10	45	22	19	43	33	18	14
CLIP10-H	10	3/8	3	11	49	26	19	49	42	25	19
CLIP13-H	12-13	1/2	3	13	61	30	26	58	48	27	34
CLIP16-H	16	5/8	3	16	74	33	32	64	52	33	45
CLIP19-H	18-19	3/4	4	14	86	38	37	72	57	37	68
CLIP22-H	22	7/8	4	19	98	45	40	80	62	40	108
CLIP26-H	26	1	5	19	108	48	46	88	67	44	113
CLIP28-H	28	1-1/8	6	19	117	51	51	91	72	48	140
CLIP32-H	32	1-1/4	7	22	130	59	54	105	79	56	207
CLIP34-H	34-36	1-3/8	7	22	140	60	59	108	79	58	234
CLIP38-H	38	1-1/2	8	22	147	66	60	112	86	64	266
CLIP44-H	38	1-3/4	8	29	175	78	74	134	97	78	441
CLIP50-H	44	2	8	32	195	86	78	152	113	87	603
CLIP58-H	58	2-1/4	8	32	208	98	81	162	116	100	707
CLIP64-H	64	2-1/2	9	32	227	105	87	168	119	113	806
CLIP70-H	70	2-3/4	10	32	243	112	91	174	127	124	1000
CLIP76-H	76	3	10	38	271	121	104	194	135	136	1440




WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

DESCRIPTION & FEATURES

- **Purpose:** Prevent hose whip and accidental separation.
- **Material:** Made from steel cables with spring loaded loops.
- **Function:** Securely attach hoses and fittings to control movement.
- **Safety Benefit:** Reduces injury and damage risks in high pressure systems.
- **Versatile:** Suitable for compressed air and hydraulic applications.
- **Durable:** Withstands high pressures and frequent use.
- **Easy Installation:** Simple to install for added security.
- **Compliance:** Meets safety regulations for industrial use.
- **Maintenance:** Requires periodic inspection for continued safety.
- **Essential:** Enhances workplace safety in industrial settings.
- CE, SWL & JB Lifting (JBL) Mark shown on the product.



WHIPCHECK SAFETY CABLES

WHC

Item Code	Cable Diameter D1		Hose Diameters D2		Min. Breaking Strain of Cable kg	Length L Meter	Weight per cable kg
	Inch	mm	Inch	mm			
WHC03x0.5	1/8	3	1/2 to 1.25	12 to 32	588	0.6	0.09
WHC06x01	1/4	6	1.5 to 3	38 to 76	2350	1	0.52
WHC08x01	5/16	8	3.5 to 6	88 to 152	3750	1	0.8



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

WIRE ROPE CLOSED SPELTER SOCKET



DESCRIPTION & FEATURES

- **Purpose:** Used for wire rope termination and attachment.
- **Structure:** Tubular with a conical or spelter socket, closed on one end.
- **Installation:** Inserted and swung onto the wire rope for a secure termination.
- **Applications:** Commonly used in rigging, lifting, and suspension applications.
- **Safety Focus:** Provides a strong and reliable connection for safety and load-bearing capabilities.
- **Protection:** Closed end offers added protection to the wire rope.
- **Durability:** Designed for long-lasting and reliable performance.
- **Versatile:** Suitable for various industrial and commercial uses.
- **Compliance:** Meets safety standards and regulations for wire rope terminations.
- CE, SWL & JB Lifting (JBL) Mark shown on the product.



WIRE ROPE CLOSED SPELTER SOCKET

SKSRC

Item code(S)	Rope Dia		Structural Strand Dia. (in)	Ultimate Load (t)	Weight Each (lb)	Dimensions (in)									
	(in)	(mm)				A	B	C	D	F	G	H	J	K	L
SKSRC-10	5/16 - 3/8	8-10	—	12.0	75	4.94	62	1.69	0.97	0.50	0.81	1.69	2.25	0.69	2.06
SKSRC11-13	7/16 - 1/2	11-13	—	20.0	1.50	5.50	69	2.00	1.16	0.56	0.94	2.00	2.50	0.88	2.31
SKSRC14-16	9/16 - 5/8	14-16	1/2	30.8	2.5	6.31	81	2.63	1.41	0.69	1.12	2.38	3.00	1.00	2.50
SKSRC18	3/4	18	9/16 - 5/8	43.5	4.25	7.62	1.06	3.00	1.66	0.88	1.25	2.75	3.50	1.25	3.06
SKSRC20-22	7/8	20-22	11/16 - 3/4	65.3	7.25	8.75	1.25	3.63	1.94	1.00	1.50	3.25	4.00	1.50	3.50
SKSRC24-26	1	24-26	13/16 - 7/8	81.6	10.50	9.91	1.41	4.13	2.30	1.13	1.75	3.75	4.50	1.75	4.00
SKSRC28-30	1-1/8	28-30	15/16 - 1	100	14.25	11.00	1.50	4.50	2.56	1.25	2.00	4.13	5.00	2.00	4.50
SKSRC32-35	1-1/4 - 1-3/8	32-35	1-1/16 - 1-1/8	136	19.75	12.12	1.63	5.00	2.81	1.50	2.25	4.75	5.50	2.25	5.00
SKSRC38	1-1/2	38	1-3/16 - 1-1/4	170	29.20	13.94	1.94	5.38	3.19	1.63	2.75	5.25	6.00	2.50	6.00
SKSRC40-42	1-5/8	40-42	1-5/16 - 1-3/8	188	36.00	15.13	2.13	5.75	3.25	1.75	3.00	5.50	6.50	2.75	6.50
SKSRC44-48	1-3/4 - 1-7/8	44-48	1-7/16 - 1-5/8	268	57.25	17.25	2.19	6.75	3.75	2.00	3.13	6.38	7.50	3.00	7.56
SKSRC50-54	2 - 2-1/8	50-54	1-11/16 - 1-3/4	309	79.00	19.87	2.44	7.63	4.38	2.25	3.75	7.38	8.50	3.25	8.81
SKSRC56-60	2-1/4 - 2-3/8	56-60	1-13/16 - 1-7/8	360	105.00	21.50	2.75	8.50	5.00	2.63	4.13	8.25	9.00	3.63	9.75
SKSRC54-67	2-1/2 - 2-5/8	64-67	1-15/16 - 2-1/8	424	140.00	23.50	3.12	9.50	5.50	2.88	4.50	9.25	9.75	4.00	10.62
SKSRC70-73	2-3/4 - 2-7/8	70-73	2-3/16 - 2-7/16	549	220.00	25.38	3.12	10.75	6.25	3.12	4.88	10.19	11.00	4.88	11.25
SKSRC75-80	3 - 3-1/8	75-80	2-1/2 - 2-5/8	656	276.00	27.12	3.37	11.50	6.75	3.38	5.25	11.50	12.00	5.25	11.75
SKSRC82-86	3-1/4 - 3-3/8	82-86	2-3/4 - 2-7/8	750	313.00	29.25	4.00	12.25	7.25	3.62	5.75	12.25	13.00	5.75	12.25
SKSRC88-92	3-1/2 - 3-5/8	88-92	3 - 3-1/8	820	400.00	31.00	4.00	13.00	7.75	3.88	6.31	13.00	14.00	6.25	13.00
SKSRC94-102	3-3/4 - 4	94-102	—	1005	542.00	33.25	4.25	14.25	8.50	4.25	7.25	14.25	15.00	7.00	14.00



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

WIRE ROPE OPEN SPELTER SOCKET



DESCRIPTION & FEATURES

- **Purpose:** Used for wire rope termination and attachment.
- **Structure:** Open ended tubular design with a conical or spelter socket.
- **Installation:** Inserted and swung onto the wire rope for a secure termination.
- **Applications:** Commonly used in rigging, lifting, and suspension applications.
- **Versatile:** Allows attachment of wire rope to various equipment and structures.
- **Durability:** Designed for long-lasting performance in demanding environments.
- **Safety Focus:** Essential for ensuring safety in rigging and lifting operations.
- **Compliance:** Meets safety standards and regulations for wire rope terminations.
- **Integral Component:** Vital for creating secure terminations in various industrial applications.
- CE, SWL & JB Lifting (JBL) Mark shown on the product.



WIRE ROPE OPEN SPELTER SOCKET

SKSR

ItemCode(s)	Rope Diameter	Structural Strand Dia	Weight	Dimensions									
	mm	mm	each/kg	A	C	D	F	G	H	J	L	M	N
	mm	mm	each/kg	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
SKSR6-7	6-7	–	0.5	116	19.1	17.5	9.65	17.5	39.6	57	39.6	33.3	9.1
SKSR8-10	8-10	–	0.59	123	20.6	20.6	12.7	20.6	42.9	57	44.5	38.1	11.2
SKSR11-13	11-13	–	1.02	141	25.4	25.4	14.2	23.9	47.8	63.5	51	47.8	12.7
SKSR14-16	14-16	12-13	1.63	171	31.8	30.2	17.5	28.7	57	76	63.5	57	14.2
SKSR18	18	14-16	2.64	202	38.1	35.1	20.6	31.8	66.5	89	76	66.5	15.7
SKSR20-22	20-22	18-19	4.38	235	44.5	41.4	23.9	38.1	82.5	102	89	79.5	20.3
SKSR24-26	24-26	20-22	7.03	268	51	51	28.7	44.5	95.5	114	102	95.5	22.4
SKSR28-30	28-30	24-26	9.75	300	57	57	31.8	51	105	127	117	105	25.4
SKSR32-35	32-35	28	14.1	335	63.5	63.5	38.1	57	121	140	127	121	28.7
SKSR38	38	30-32	21.4	384	76	70	41.4	70	133	152	152	137	30.2
SKSR40-42	40-42	33-35	24.9	413	76	76	44.5	76	140	165	165	146	33.3
SKSR44-48	44-48	36-40	37.2	464	89	89	51	79.5	162	191	178	165	39.6
SKSR50-54	50-54	42-45	59	546	102	102	57	95.5	187	216	229	178	46
SKSR56-60	56-60	46-48	76	597	114	114	36.5	102	210	229	254	197	54
SKSR64-67	64-67	50-54	114	648	127	127	73	114	235	24	274	216	60.5
SKSR70-73	70-73	56-62	143	692	133	133	79	124	267	279	279	229	73
SKSR75-80	75-80	64-67	172	737	146	146	86	133	282	305	287	241	76
SKSR82-86	82-86	70-73	197	784	159	159	92	146	302	330	300	254	79
SKSR88-92	88-92	76-80	255	845	171	171	98.5	165	314	356	318	274	82.5
SKSR94-102	94-102	–	355	921	191	191	108	184	346	381	343	318	89



WARNING

Never exceed Working Load Limit


The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

WIRE ROPE WEDGE SOCKET



DESCRIPTION & FEATURES

- **standard** EN 3411-6 and ASME B 30.26.
- **Safety Focus:** Essential for ensuring safety in rigging and lifting operations.
- **Purpose:** Used for wire rope termination and attachment.
- **Structure:** Open ended tubular design with a conical or spelter socket.
- **Installation:** Inserted and swung onto the wire rope for a secure termination.
- **Applications:** Commonly used in rigging, lifting, and suspension applications.
- **Versatile:** Allows attachment of wire rope to various equipment and structures.
- **Durability:** Designed for long-lasting performance in demanding environments.
- **Compliance:** Meets safety standards and regulations for wire rope terminations.
- **Integral Component:** Vital for creating secure terminations in various industrial applications.
- 80% termination efficiency.
- CE, SWL & JB Lifting (JBL) Mark shown on the product.

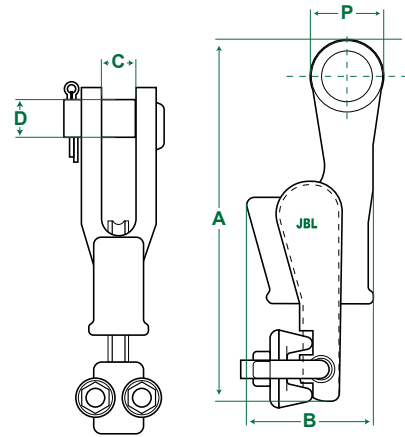

WIRE ROPE WEDGE SOCKET

WSKT

Item code(s)	WIRE ROPE DIA		DIMENSION					SWL	PL	MBL	N.W
			A	B	C	D	P				
	inch	mm	mm	mm	mm	mm	mm				
WSKT-10	3/8	9-10	143	70.5	20.5	20.5	39.6	1.2	3	59.04	1.5
WSKT-13	1/2	11-13	173	90	25.4	25.4	49.5	2.1	5.3	104	2.6
WSKT-16	5/8	14-16	208	111	32	30	57	3.3	8.2	161.6	3.8
WSKT-19	3/4	18-19	248	118	38	35	66.5	4.7	11.7	230.4	6.2
WSKT-22	7/8	20-22	283	122	44.5	41.5	79	6.4	15.9	312	9.8
WSKT-26	1	24-26	324	128	50.8	50.8	95	8.3	20.6	404.8	15
WSKT-28	1-1/8	28	365	140	57	57	108	10.4	25.9	508.8	21
WSKT-32	1-1/4	30-32	406	202	63.5	57	120	12.8	31.9	625.6	26
WSKT-36	1-3/8	36	465	220	69	64	130	15.4	38.5	754.4	38
WSKT-38	1-1/2	38	505	235	75	70	150	18.1	45.3	888	48.5



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

WIRE ROPE GRIPPER



DESCRIPTION & FEATURES

- **Purpose:** Clamps and secures wire ropes, cables, or cords.
- **Mechanical Device:** Features jaws or clamps for tightening onto the rope.
- **Functionality:** Provides a secure and non-slip connection.
- **Applications:** Used in construction, rigging, and suspension systems.
- **Reliability:** Ensures a reliable and adjustable grip on the wire rope.
- **Safety:** Essential for safety and control in various applications.
- **Versatility:** Suitable for different types of wire ropes and cables.
- **Ease of Use:** Simple to install and adjust as needed.
- **Durability:** Designed for long-lasting performance in demanding environments.
- **Compliance:** Meets safety standards and regulations for wire rope clamping devices.
- CE, SWL & JB Lifting (JBL) Mark shown on the product.



WIRE ROPE GRIPPER

WRG

ItemCode(s)	WLL	Rope Diameter	Weight
	(tonne)	(mm)	(kg)
WRG-0.5T	0.5	1-10	0.25
WRG-01T	1	5-20	0.85
WRG-02T	2	7-20	1.2
WRG-03T	3	16-32	2.52



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2024 | www.jblifting.com | All rights reserved

SAFETY JOGGER WORKS

HEAD-TO-TOE PROTECTION

SAFE & SECURE TRADING COMPANY

Tel: +966 13 859 6552

2318 Al Walid Ibn Salmah, Al Khaldiya ash Shamaliya Dammam 32231-7457, Saudi Arabia



ECOFITZ S1P



YUKON S1P



BESTBOY231 S3



CADOR S3 LOW



JUMPER31 S3



SAFETYSTAR S3

**ENGINEERED
IN EUROPE**

Modulift®

working between the hook and the load



MOD®

Modular spreader beam



TRUNNION

Shackle-free spreader beam



CMOD®

4, 6 and 8-point spreader frame



MULTI-POINT

Lifting beam



TriMOD®

3-point spreader frame



LATTICE

Long and light spreader beam

www.modulift.com

PORTABLE CRANE SCALE



DESCRIPTION & FEATURES

- **Features:** Includes shackle, hook, high-precision sensors, A/D converters, and a 5-digit 1.2-inch ultra-bright digital display.
- **Stability:** Anti-shaking, anti-vibration, anti-swing filter ensures stable readings (<5 seconds stabilization).
- **Functions:** Instant peeling, delayed peeling, automatic accumulation.
- **Battery:** Long-lasting with up to 60 hours of continuous LED display, with over-discharge protection and power-saving features.



PORTABLE CRANE SCALE

DCS

Item Code (s)	Max Cap	Min Cap	Division	Dimension						N.W
				A	B	C	D	E	H	
	kg	kg	kg	mm	mm	mm	mm	mm	mm	kg
DCS-1	1000	10	0.5/0.2	95	345	27	230	160	470	11.1
DCS-2	2000	20	1/0.5	95	345	32	230	160	475	11.3
DCS-3	3000	30	1/0.5	95	345	37	230	160	570	12.2
DCS-5	5000	50	2/1	115	345	40	230	160	610	16.9
DCS-10	10000	100	5/2	115	345	50	230	160	725	30.3
DCS-15	15000	150	5/2	115	345	65	230	160	820	33
DCS-20	20000	200	10/5	225	345	85	230	160	1100	52
DCS-30	30000	300	10/5	260	345	105	230	160	1150	95



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

DESCRIPTION & FEATURES

- **Adjustable Height:** Jack stands typically feature adjustable heights, allowing you to set the support to various levels depending on the vehicle and task requirements.
- **Durable Construction:** Made from heavy-duty steel or cast iron, jack stands are built to withstand significant weight, ensuring stability and safety during use.
- **Wide Base:** The wide base provides enhanced stability, preventing the stand from tipping or shifting under the load, even on uneven surfaces.
- **Safety Locking Mechanism:** Equipped with a secure locking system, often a pin or ratchet, jack stands ensure the vehicle remains firmly in place while you work underneath.



JACK STAND

ST

Model	Capacity(T)	Min H(MM)	Lifting H(MM)	Max H(MM)	N.W
ST8802	2	280	145	425	4.6
ST8803	3	285	140	425	5.5
ST8806	6	390	205	595	10
ST8812	12	482	265	747	25



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

- **High Weight Capacity:** Floor jacks are designed to lift heavy vehicles, with most models capable of supporting loads ranging from 2 to 4 tons.
- **Low Profile Design:** Many floor jacks feature a low profile, allowing them to easily slide under low-clearance vehicles for easy access and lifting.
- **Quick Lifting Mechanism:** Equipped with a hydraulic system, floor jacks enable efficient lifting of vehicles with minimal effort, often with just a few pumps of the handle.
- **Swivel Caster Wheels:** The swivel caster wheels on a floor jack provide easy maneuverability and positioning, allowing users to place the jack precisely.



FLOOR JACK

SFTL

Model	Capacity(T)	Min H(MM)	Lifting H(MM)	Max H(MM)	N.W
STFL320L	2.5	140	320	460	22
STFL329L	2.5	85	300	385	12.5
STFL330L	3	75	425	500	31



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

BOTTLE JACK ST03

DESCRIPTION & FEATURES

- **Compact and Portable Design:** Bottle jacks are typically small and easy to transport, making them ideal for use in a variety of settings.
- **High Lifting Capacity:** Bottle jacks can lift heavy loads, often ranging from 2 tons to over 50 tons, depending on the model.
- **Hydraulic Mechanism:** These jacks use a hydraulic system to lift loads with minimal effort, providing a smooth and controlled lift.
- **Stable and Durable Construction:** Made from heavy-duty materials like steel, bottle jacks are built to withstand high pressure and provide a stable lifting platform.



BOTTLE JACK ST03

ST

Model	Capacity(T)	Min H(MM)	Lifting H(MM)	Adjust H(MM)	Max H(MM)	N.W
ST0203	2	158	90	60	308	2.23
ST0303	3	195	125	60	380	3.2
ST0503	5	197	125	60	382	4.1
ST0803	8	205	125	60	390	4.9
ST1003	10	205	125	60	390	5.6
ST1203	12	215	125	60	400	6.5
ST1503	15	225	140	60	425	7.8
ST2003	20	244	145	60	449	10.2
ST3003	30	285	180	60	465	13.5
ST5003	50	300	180	60	480	29.5



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

BOTTLE JACK ST03B

DESCRIPTION & FEATURES

- **High Lifting Capacity:** Bottle jacks are designed to lift heavy loads, often supporting weights from 2 tons to over 50 tons.
- **Compact and Portable:** Their compact design allows for easy transportation and storage, making them ideal for roadside repairs or garage use.
- **Stable Base:** They feature a wide, stable base to prevent tipping, ensuring safe lifting even on uneven surfaces.
- **Hydraulic Operation:** Bottle jacks use hydraulic power for smooth, efficient lifting with minimal effort, typically operated by a manual pump handle.



BOTTLE JACK ST03B

ST

Model	Capacity(T)	Min H(MM)	Lifting H(MM)	Adjust H(MM)	Max H(MM)	N.W
ST0203B	2	181	116	48	345	2.35
ST0303B	3	195	125	60	380	3.2
ST0503B	5	216	127	70	413	4.2
ST0803B	8	230	147	80	457	5.3
ST1003B	10	230	150	80	460	6
ST1203B	12	230	155	80	465	7.2
ST1503B	15	230	150	80	460	7.9
ST2003B	20	244	145	80	449	10.7
ST3003B	30	240	130	80	370	18.8
ST5003B	50	236	120	80	356	26.5



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

CLT/CLB CONTAINER LIFTING LUGS

Always read operating instructions prior to use.

CLT for top lifting CLB for side lifting

Working load limit* (WLL) 32000 – 56000kg

These container lifting lugs are supplied, and used, in sets of 4 and have a total lifting capacity of up to 56 tonne. The CLT and CLB lugs serve as flexible lashing points for the transportation of containers.

Two types are available dependant on if you want to fasten them to the top or the side of the container.

The CLT type is vertically mounted in the hole at the top of the container and is locked into place by simply turning the lug 90°. This configuration allows for transportation via the use of a lifting frame in conjunction with cables, chains or slings.

The CLB model is mounted horizontally to the side of the container at either the top or the bottom fixing holes. This model has a spring loaded bolt to prevent accidental release.

NB. NOT TO BE USED ON A 4 LEG CHAIN SLING



**CLT
for top lifting**




**CLB
for side lifting**

Model	WLL kg*	Type of Lifting	Sling angle from vertical	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Weight kg*
CLT	32000 40000 50000	SIDE	50° 36° Vertical	152	181	45	37	73	75	40	18
CLB	56000	TOP	Vertical	123	217	45	39	57	101	121	28


*Per set of 4



Container lifting lug
CLB

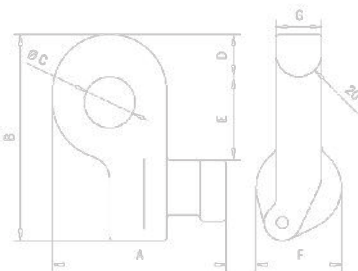

Container lifting lug
CLT

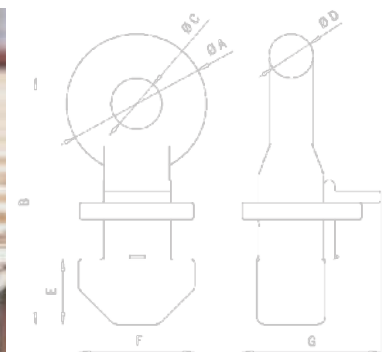

MOBILE GANTRY CRANE



DESCRIPTION & FEATURES

Our portable gantry cranes are engineered to provide a versatile lifting solution tailored to your specific requirements. With a capacity of up to 20 tonnes, these cranes are designed for maximum durability and adaptability, ensuring seamless integration with both electric and manual chain hoists. Built on a custom-order basis, our gantry cranes cater to a wide range of applications, from heavy-duty industrial tasks to lighter, more precise operations. Whether you need a reliable solution for indoor or outdoor use, our cranes offer superior mobility, strength, and ease of assembly, making them the ideal choice for any lifting challenge.



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

LIFTING EQUIPMENT FRAME



DESCRIPTION & FEATURES

Storage Rack for Lifting Equipment a versatile solution for organised storage

Overall height: 2080 mm

Overall width: 1000 mm

Length between uprights: 1948 mm

Length of arms: 485 mm

Height distance between arms: 530 mm

Length distance between arms on bottom rack: 350 mm

Length distance between arms on middle rack: 250 mm

Length distance between arms on top rack: 235 mm

The rack has been load tested to 20 kg on each peg (760 kg over the frame)

Weight: 181 kg



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

3 STRAND ROPE



3 STAND ROPE

	Polypropylene Rope		Polyester Rope		Polamide (Nylon) Rope		High Strength	
Dia	Weight per coil of 100 Mtrs	Minimum Breaking Strength	Weight per coil of 100 Mtrs	Minimum Breaking Strength	Weight per coil of 100 Mtrs	Minimum Breaking Strength	Weight per coil of 100 Mtrs	Minimum Breaking Strength
mm	KG	KGF	KG	KGF	KG	KGF	KG	KGF
4	0.72	290	1.21	290	1.00	380	0.72	320
6	1.63	610	2.73	610	2.22	820	1.63	690
8	2.89	1020	4.85	1080	3.95	1430	2.90	1200
10	4.52	1530	7.58	1630	6.17	2160	4.53	1800
12	6.51	2160	10.90	2280	8.88	3060	6.52	2600
14	8.86	2850	14.90	3060	12.10	4080	8.88	3500
16	11.60	3820	19.40	4080	15.80	5100	11.60	4400
18	14.60	4590	24.60	5100	20.00	6420	14.70	5600
20	18.10	5710	30.30	6120	24.70	8160	18.10	6800
22	21.90	6830	36.70	7240	29.90	9680	21.90	8100
24	26.00	8160	43.70	8670	35.50	11420	26.10	9500
26	30.60	9170	51.20	10200	41.70	12740	30.60	10900
28	35.40	10810	59.4	12030	48.40	15290	35.50	12500
30	40.70	12000	68.20	13460	55.50	17330	40.80	14300
32	46.30	13500	77.60	15300	63.20	19370	46.40	16000
36	58.60	17300	98.20	19370	80.00	24060	58.70	19800
40	72.30	20400	121.00	24060	98.70	30580	72.50	23900
44	87.50	25500	147.00	28540	119.00	36190	87.70	28200
48	104.00	28500	175.00	34150	142.00	40780	104.00	33100
52	122.00	34150	205.00	38230	167.00	48420	122.00	38300
56	142.00	38200	238.00	43320	193.00	57090	142.00	43700
60	163	43300	273.00	50970	222.00	64220	163.00	49500
Production Standard	BS EN ISO 1346:2021		BS EN ISO 1141:2021		BS EN ISO 1140:2021		BS EN ISO 10572:2009	

Weights are subject to $\pm 5\%$ variation.

Above values are applicable only to new ropes.

Length Measured under tension as per standard.



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved

8 STRAND ROPE



8 STAND ROPE

		Polypropylene Rope		High Strength		Polyamide (Nylon) Rope		PP + Polyester Mix Rope	
Dia	Circ	Weight per coil of 100 Mtrs	Minimum Breaking Strength	Weight per coil of 100 Mtrs	Minimum Breaking Strength	Weight per coil of 100 Mtrs	Minimum Breaking Strength	Weight per coil of 100 Mtrs	Minimum Breaking Strength
mm	Inches	KG	KGF	KG	KGF	KG	KGF	KG	KGF
36	4.5	59	16300	59	22800	81	25500	72.00	23800
40	5	72	20400	72	27900	100	30600	88.50	29100
44	5.5	88	24100	88	33300	121	36200	107.00	35000
48	6	104	28500	104	39300	144	43300	127.00	41200
52	6.5	122	34200	122	45700	170	51000	150.00	48000
56	7	142	38200	142	52400	197	57100	173.00	55400
60	7.5	163	43300	163	59400	226	64200	199.00	63200
64	8	185	48400	186	67000	257	72400	227.00	71500
72	9	234	61200	235	83600	325	91700	287.00	89400
80	10	289	76500	290	101400	401	114200	354.00	109100
88	11	350	91700	351	121300	486	134600	428.00	131500
96	12	417	108100	417	142700	578	163100	510.00	155000
104	13	489	127400	490	165100	678	183500	600.00	180400
112	14	567	142700	568	191600	787	216100	690.00	208000
120	15	651	163100	652	217100	903	240600	796.00	237500
Production Standard		BS EN ISO 1346 : 2021		BS EN ISO 10572 : 2009		BS EN ISO 1140 : 2021		BS EN ISO 10556 : 2009	

120mm maximum length is 170 Mtr. Weights are subject to 5% variation. Above values are applicable only to new ropes.
Each coil is supplied with a test certificate issued by Lloyd's Register of Shipping.
Length measured under tension as per standard.
HSPP & Mix Rope as per MEG4 guidelines.



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved



HEAD OFFICE (DAMMAM)

TEL: +966-13-8596552, 8596553

FAX: +966-13-8596559

DAMMAM BRANCH

TEL: +966-13-8302181, 8341671

FAX: +966-13-8351878

JUBAIL BRANCH

TEL: +966-13-3621849, 3620372

FAX: +966-13-3621394

RIYADH BRANCH

TEL: +966-55-3330762

 sales@SafeAndSecureKSA.com

 www.SafeAndSecureKSA.com

P.O. Box 69493, Dammam 31547, Kingdom of Saudi Arabia