


# STAINLESS STEEL CHAIN BLOCK



## DESCRIPTION & FEATURES

- **Material:** SS AISI 304
- Automatic double pawl braking system for safety.
- Asbestos-free friction disc for safe, reliable use.
- Tested for 1500 cycles as per international standards.
- High-strength alloy load chain (ISO3077-1984 compliant).
- 360° swivel hook with safety latch for secure and flexible lifting.
- Industrial-grade powder coating for enhanced durability and corrosion resistance.
- Compact and lightweight design for easy transport and operation.

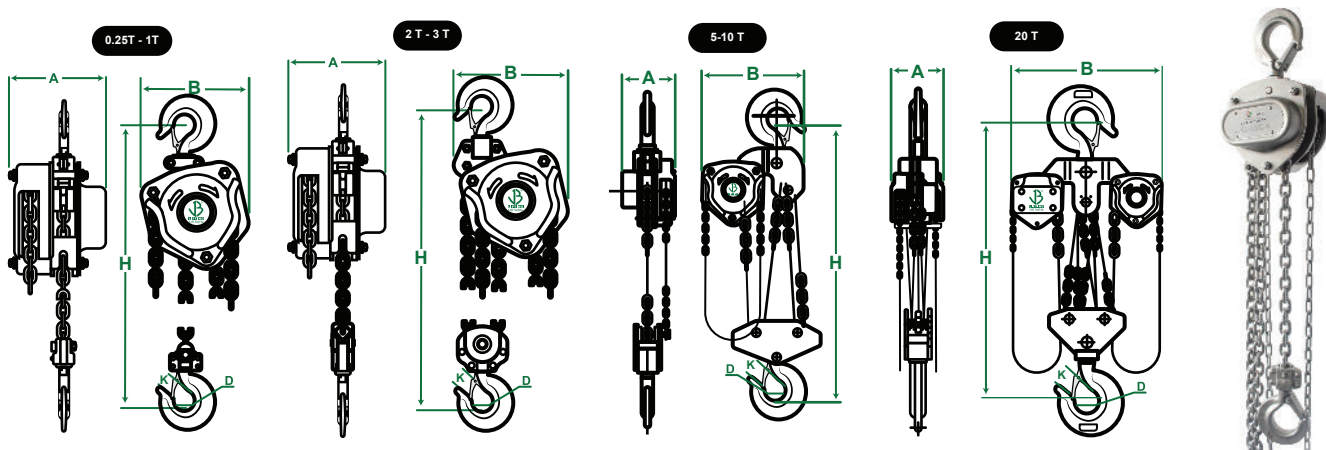

## STAINLESS STEEL CHAIN BLOCK

## SSCHB

Capacity	t	0.25	0.5	1	2	3	5	10	20
Standard lift	m	3	3	3	3	3	3	3	3
Running test load	kN	3.75	7.5	15	30	45	75	150	300
Effort to lift rated load	N	200	200	300	310	320	380	390	420
Diameter of Load chain	mm	4	7.1	7.1	7.1	9	9	11.2	11.2
Strands of load chain		1	1	1	2	2	3	4	8
A	mm	105	152	152	152	167	167	225	400
B	mm	109	160	160	185	230	350	390	680
D	mm	32	41	50	51	57	67	105	125
K	mm	27	27	29	38	41	60	70	78
H	mm	250	350	370	475	565	710	1050	1200
Net weight	kg	4	12.1	12.8	19.2	31.4	41	72	153
Extra weight per meter of extra lift	kg	0.4	1.97	1.97	3.1	4.1	5.5	12	22.4



## WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!  
Copyright©2024 | www.jblifting.com | All rights reserved