

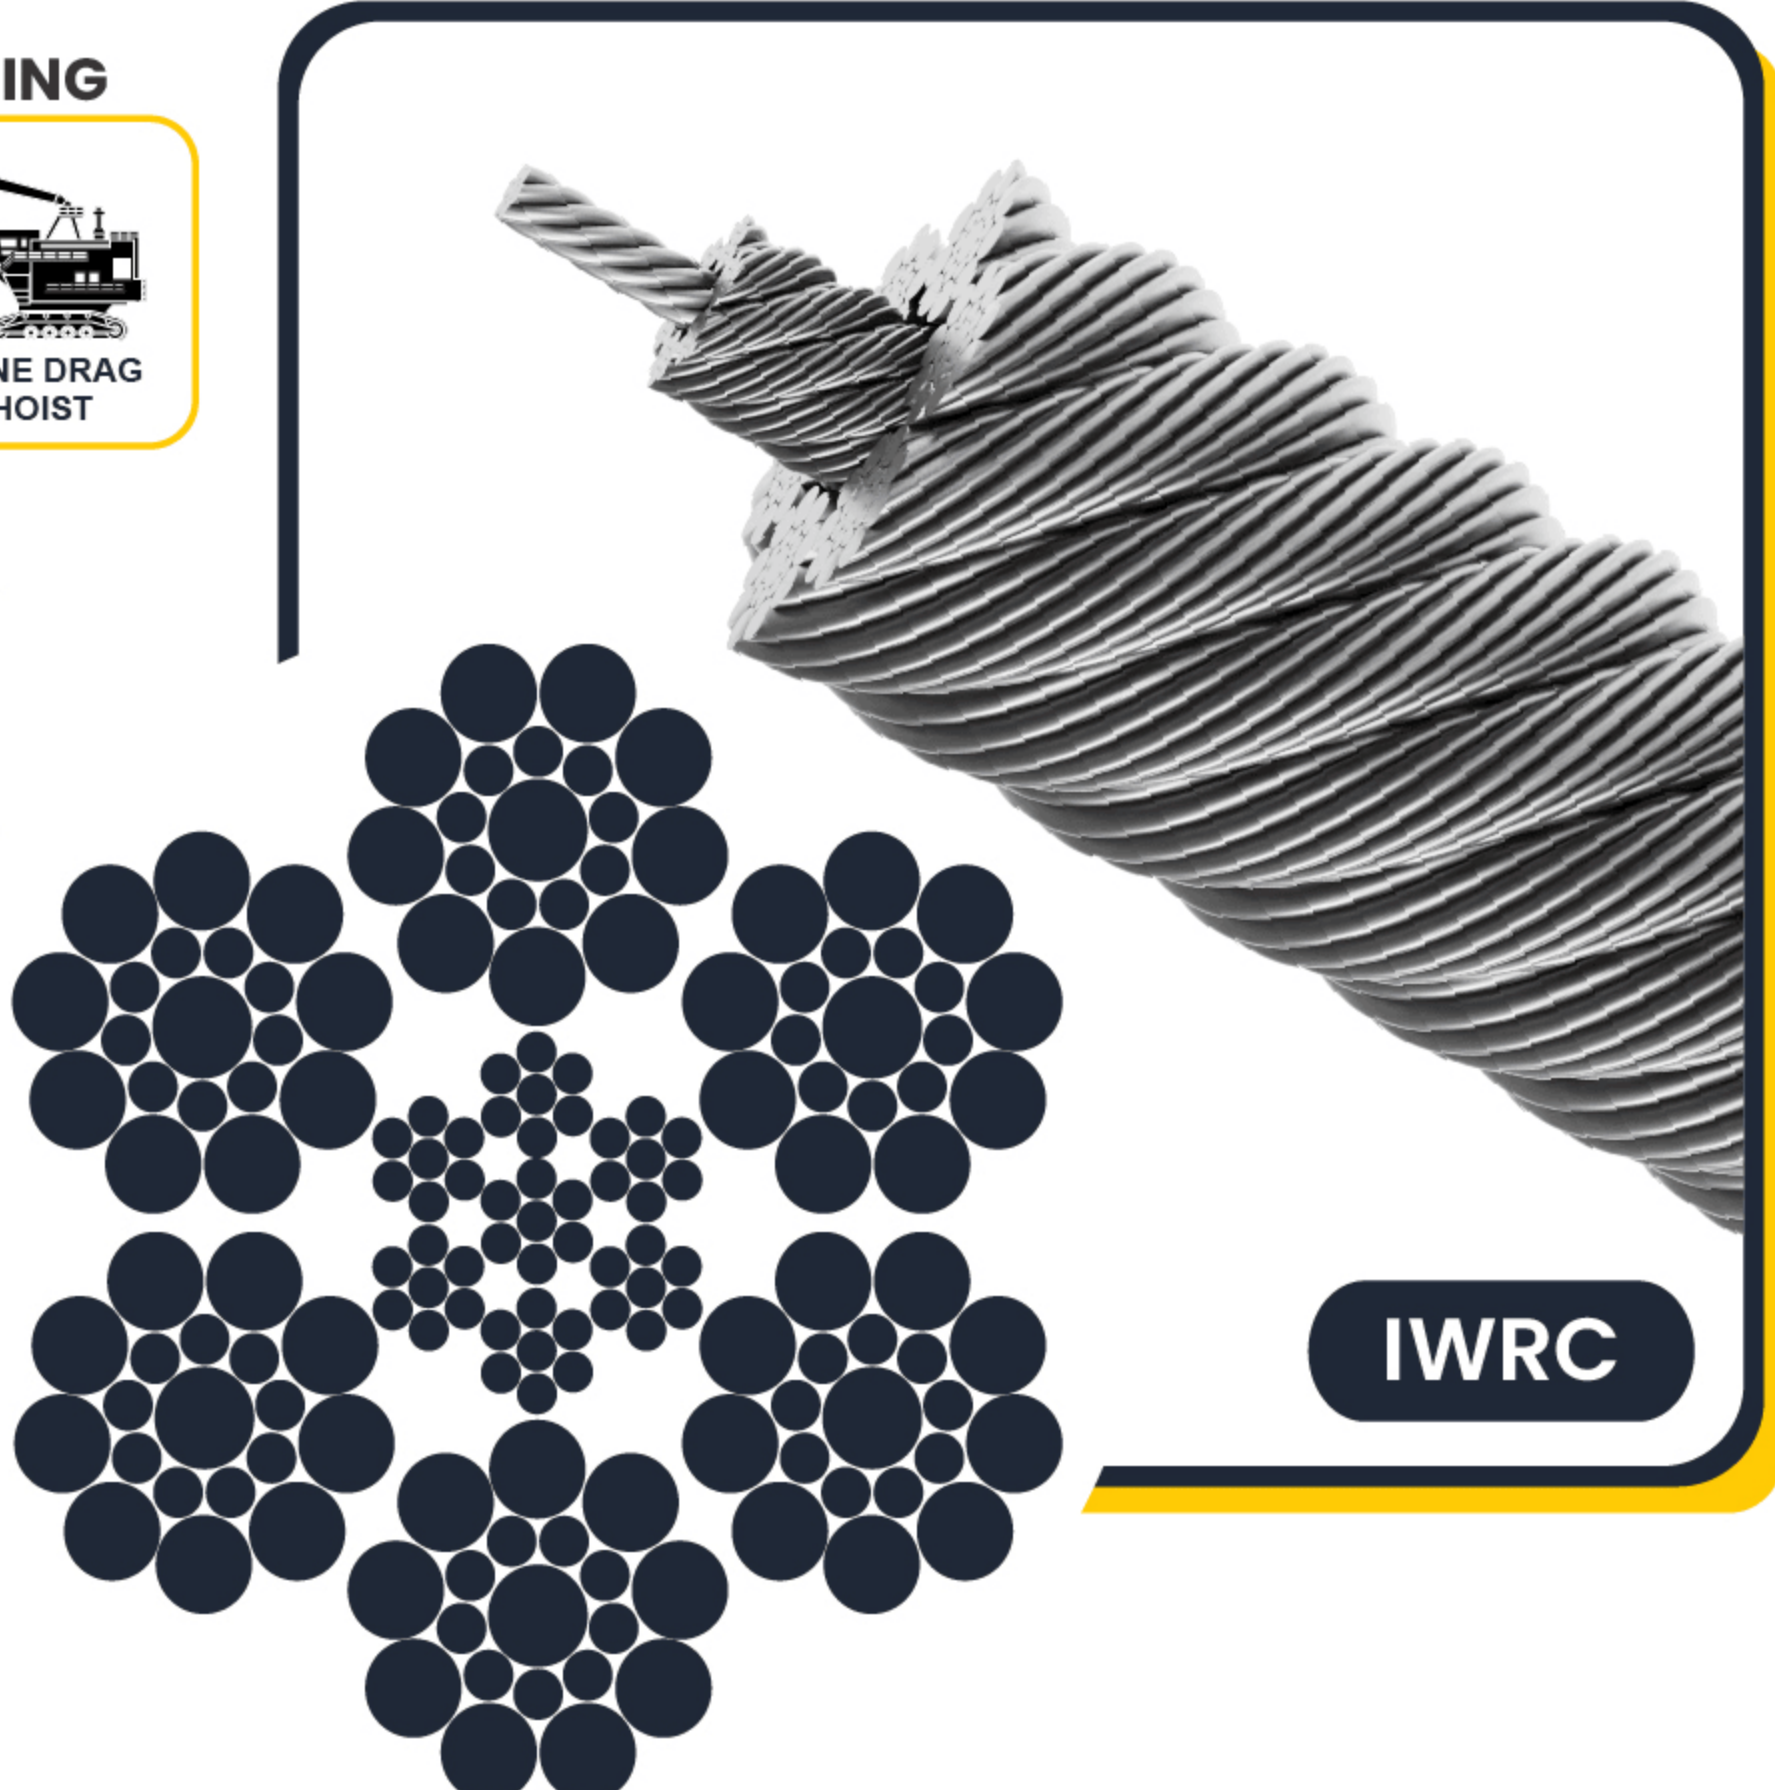


BULL ROPE - 6x19S(9-9-1) - FC/IWRC

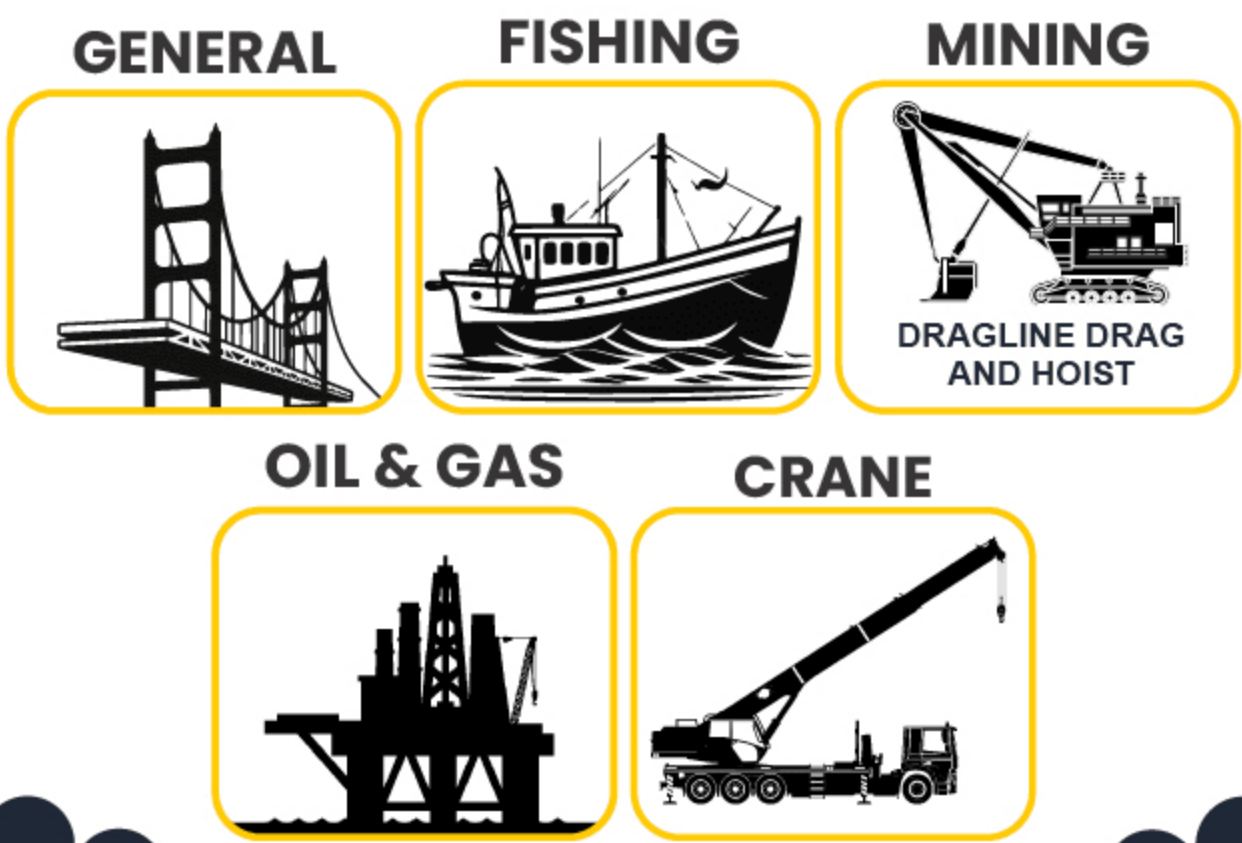

CORE APPLICATIONS

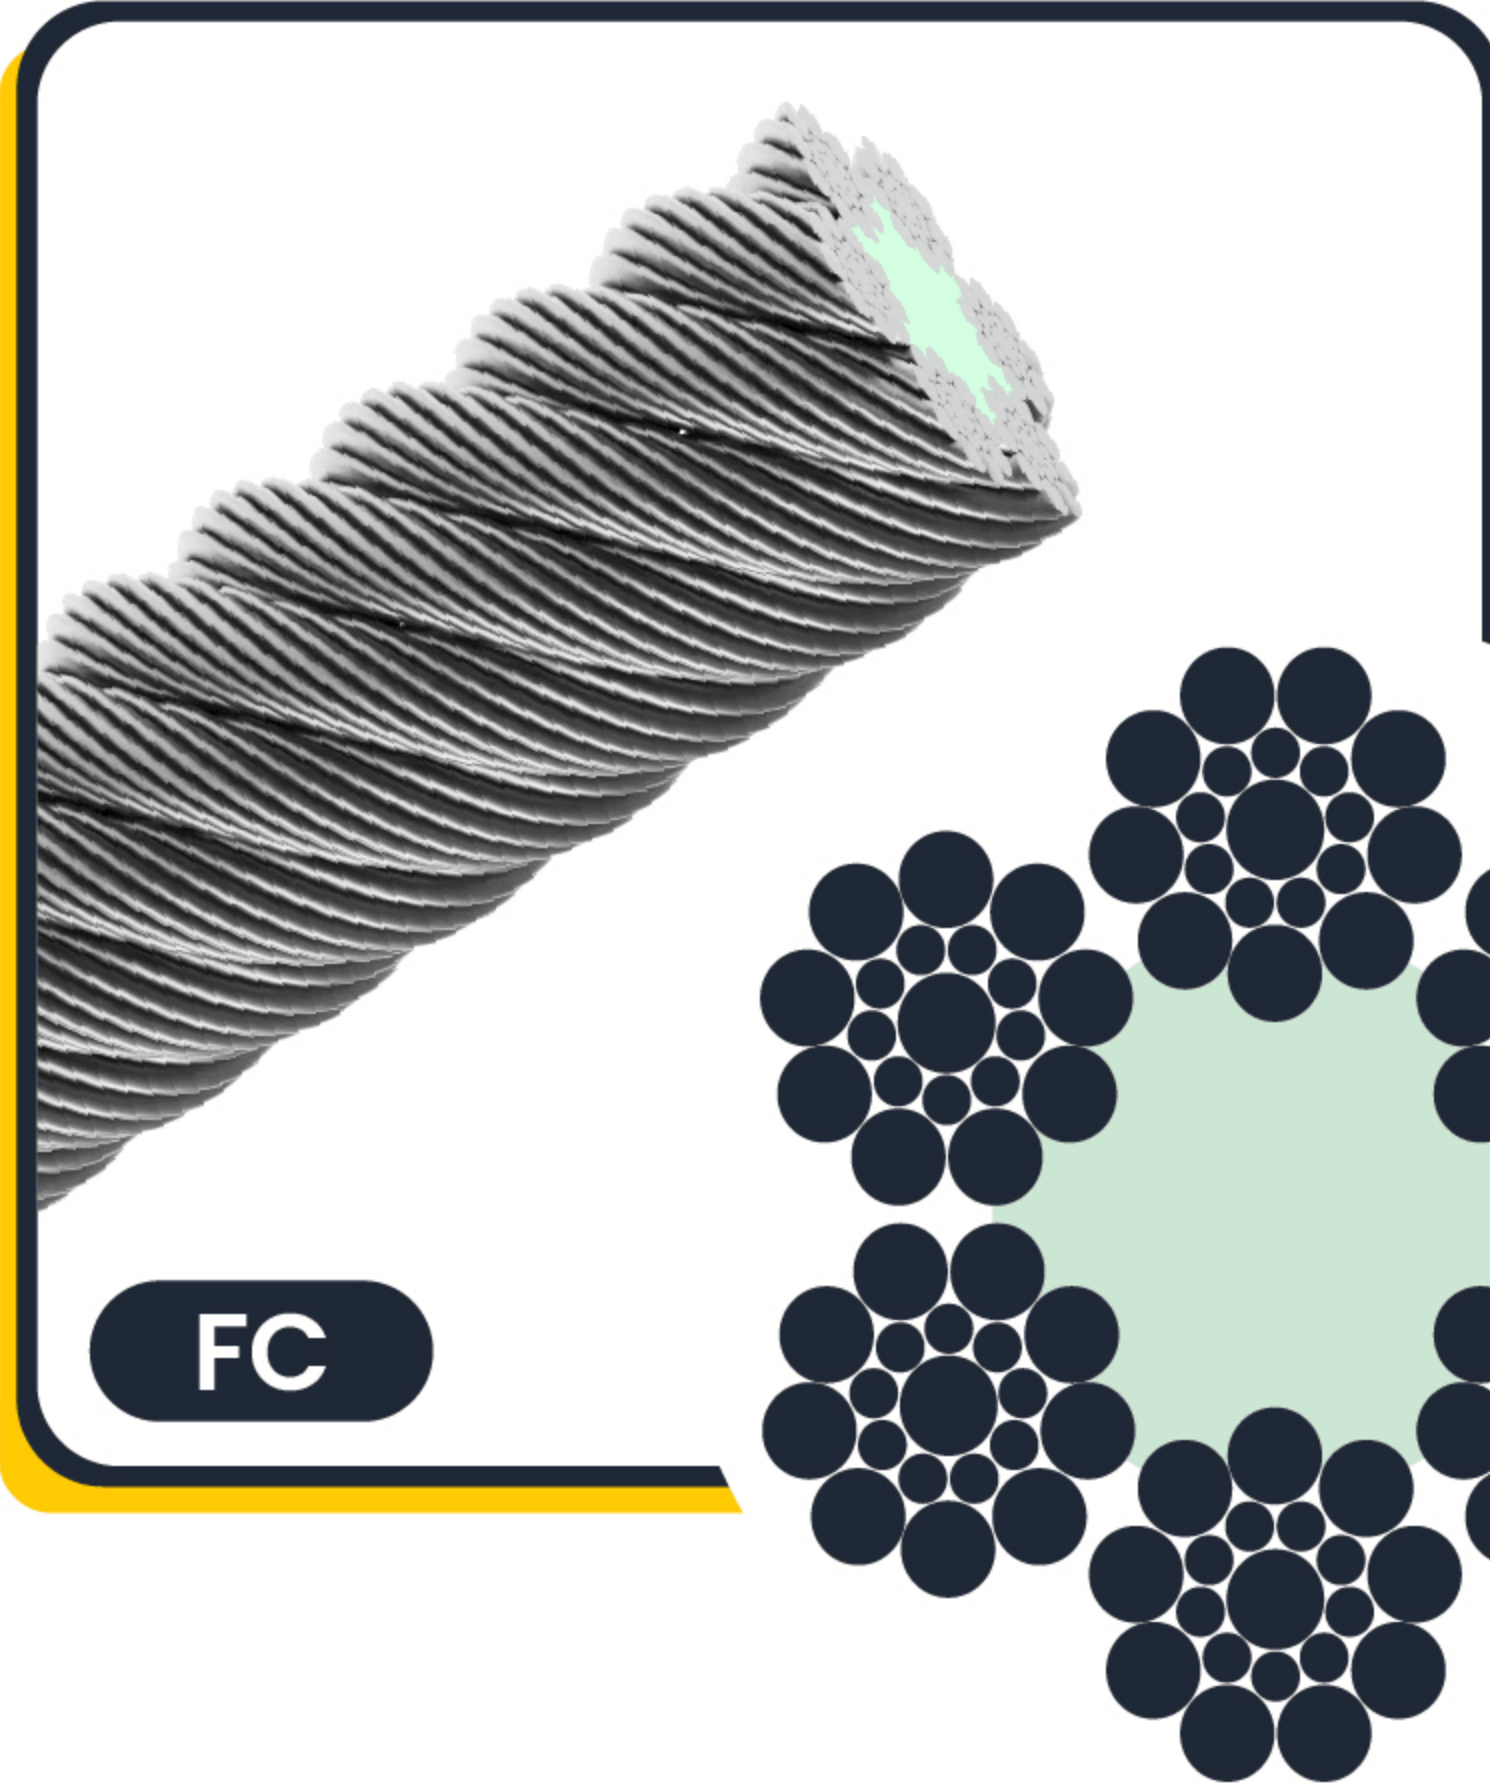

Details of Wire Rope

A

Specification

FC

- Good Abrasion Resistance
- High Flexibility
- Low Crush Resistance

IWRC

- Good Abrasion Resistance
- Low Flexibility
- Better Crush Resistance

B

Finish

- Galvanized
- Ungalvanized

C

Lay Options

- RHO (Right Hand Ordinary lay)
- LHO (Left Hand Ordinary lay)
- RHL (Right Hand Langs lay)
- LHL (Left Hand Langs lay)

Specification Chart

Normal Diameter	Approx Mass		Minimum Breaking Force			
			1770		1960	
	Kg/100m		kN		kN	
mm	FC	IWRC	FC	IWRC	FC	IWRC
6	13.5	15.1	21	23	23	25
8	23.8	26.5	37	40	41	45
10	37.1	41.4	58	63	65	70
12	53.8	59.9	84	91	93	100
13	61.7	68.8	99	106	109	118
14	71	79	114	124	127	137
16	94.8	105	150	161	166	179
18	120	133	189	204	210	226
19	132	146	211	227	233	252
20	149	165	234	252	259	279
22	175	195	283	305	313	338
24	212	235	336	363	373	402
25	229	255	365	394	404	436
26	248	276	395	426	437	472
28	288	319	458	494	507	547
30	335	371	526	567	582	628
32	376	417	598	645	662	715
34	423	470	675	728	748	807
36	474	527	757	817	838	904
38	528	586	843	910	934	1008
40	590	654	935	1008	1035	1116
42	661	709	1030	1112	1141	1231
44	723	802	1131	1220	1252	1351
46	790	876	1236	1333	1369	1476
48	854	948	1346	1452	1490	1608
50	916	1007	1460	1575	1617	1744
51	954	1049	1519	1639	1682	1815
52	991	1089	1579	1704	1749	1887
54	1070	1176	1703	1837	—	2035

⚠ More sizes available! The table shows some of our rope sizes. For additional options, just ask!



WARNING

Never exceed Working Load Limit

The data of products dimension in the catalogue is just for reference!
Copyright©2023 | www.jblifting.com | All rights reserved